

CrazyTalk⁶

Online Help (Standard)



About CrazyTalk6	6
System Requirements.....	7
Getting Started	8
Getting Started - Creating a CrazyTalk Project	10
Getting Started - Creating CrazyTalk Models	12
Creating Multiple CrazyTalk Models	13
Detailed Model Editing.....	19
Getting Started - Creating a Stage.....	30
Generate Empty Stage from Scratch.....	31
Setting Project Length.....	32
Adding Scripts.....	33
Setting Camera Movements	35
Importing Background Audio	36
Getting Started - Adding Model Audio.....	38
Adding Model Audio	39
Getting Started - Creating a CrazyTalk Script	40
Modifying a Talking Script.....	41
Adding Expressions to a Talking Script	42
Getting Started - Output.....	44
Creating a CrazyTalk Project	50
Introducing the Project Page.....	51
New Project.....	53
Setting Custom Default Project	54
Saving a Project	56
Creating CrazyTalk Models	60
Introducing the Model Page	61
Selecting an Image.....	66
Image Processing	68
Creating Multiple Heads.....	71
Automatic Image Fitting.....	75
Specifying Face Orientation and Style	77
Defining the 3D Face Orientation.....	78
Selecting Appropriate Face Style	79
Wire Frame Mode - Character Frame and Head Frame...	80
Character Frame and Head Frame	81
Basic Facial Mode and Detailed Facial Mode	83
Hair Mesh Layer.....	84
Editing the Background Mask	87

Using Background Mask Editing Panel	88
Loading an Image with Predefined Alpha Channel	90
Configuring the Background Settings	91
Defining Background Mask for Entire Character	93
Introducing the Fitting Tools	96
Specifying Idle Settings.....	98
Advanced Facial Settings	99
VividEye Technology	100
Eye Template Gallery	101
Eye Settings - Eyeball	105
Creating Custom Eyeballs.....	107
Eye Settings - EyeOptics.....	108
Eye Settings - EyeMagic	111
Saving Custom Eye Template	116
Teeth Settings.....	118
Creating Custom Teeth.....	120
Mouth Settings.....	122
Lips Settings.....	123
Saving Project Models	124
Creating a CrazyTalk Stage.....	125
Introducing the Stage	126
Basic Concepts of Stage and Scripts.....	131
Inserting Talking Script to Models.....	134
Inserting Talking Script: Using Talking Script (CTS)	135
Inserting Talking Script: Using the Sound Recorder	136
Inserting Talking Script: Importing WAV/MP3 Files..	137
Inserting Talking Script: Converting Text to Speech	138
The Layers of Models on the Stage.....	139
Changing Layer Order of Models	140
Exchanging Talking Scripts.....	142
between Models in Stage Editor	142
Aligning Model Position	144
Utilizing Camera to Create Close-Ups	146
Resuming Key and Setting Default Key for Camera	148
Adding Background Music.....	153
Introducing the Emotives	154
Choosing an Emotive	155
Changing the Expression Intensity	155
Introducing the Script Timeline Panel	156

	Saving a Script	157
	Editing the Talking Script: Using the Timeline Viewing	
Tools	158	
	Editing the Talking Script: Using the Timeline Editing	
Tools	159	
	Editing the Talking Script: Applying and Creating Voice	
Effects	160	
	Editing the Talking Script: Model Movements and the	
Background		163
	Editing the Talking Script: Using Motion Clips.....	165
	Editing the Talking Script: Creating and Adding Motion	
Clips	166	
	Editing the Talking Script: Grouping and Ungrouping	
	167	
	Editing the Talking Script: Applying Motion Clips.....	168
	Editing the Talking Script: Motion Clip Property.....	169
	Editing the Talking Script: Introducing the Puppeteering	
Panel	170	
	Editing the Talking Script: Full Face Control	
Puppeteering		172
	Editing the Talking Script: Multi-Layer Recording	175
	Editing the Talking Script: Puppeteering Settings	177
Creating a 3D Stereo Project		178
	The Concepts of 3D Stereo Vision.....	179
	Creating 3D Stereo Projects in CrazyTalk.....	182
	Environment for Viewing 3D Stereo Media	185
	Viewing Methods of 3D Stereo Media.....	187
	Viewing with Any Device.....	188
	Viewing with Specific External Devices.....	189
	Viewing with Bare Eyes.....	190
	Viewing on YouTube	192
Output		194
Introducing the Output Page		195
General Output Settings		198
Cropping		199
Output Media		200
Output for 3D Stereo Media		201
Output for Widget		202
	Creating Custom Web Avatar File	204

Custom Avatar	205
Custom Talking Script.....	206
Output for Web.....	208
Output for YouTube	210
Preference Settings	212
Assets Location	216
Keyboard Shortcuts	218

About CrazyTalk6

CrazyTalk6 features multiple actor animation capabilities for generating real-time dialogue sequences, along with **VividEye** technology to highly increase the high realism of virtual eye movement, and auto human face fitting advancement in **Reallusion's** remarkably simple image transformation process that converts any 2D image into a fully animated digital actor within minutes. **CrazyTalk6** also empowers your desktop with the 3D digital media experience. It supports **Side-by-Side** and **Anaglyph** outputs which allow you to view 3D videos with **Red-Cyan**, **Shutter** or **Polarization** glasses and any general or specific display device.

By viewing the **CrazyTalk6** Help, you will be able to learn:

- How to transform your image into an actor.
- How to animate actor speech movements, emotions & SFX.
- How to control actor's stage and timeline editor.
- How to export for various applications.
- How to export 3D stereo media.

System Requirements

Hardware

- Pentium IV 2GHz (2.4GHz or higher recommended).
- 512MB RAM (1GB or higher recommended).
- 1GB disk space (2GB or higher recommended).
- Duplex Sound Card/VGA Card/Keyboard/Mouse/Microphone/Speaker.

Operating System

- Windows XP SP2/Vista, Windows 7.

Browser

- Internet Explorer 6 or above.
- Firefox 2 or above.

Miscellaneous

- DirectX 9 & WMEncoder 9 are required for WMV exporting.

GETTING STARTED

CrazyTalk allows you to import any digital photo, image or likeness of a face from your personal collection. Then, by using a combination of innovative technologies like real time image morphing, Natural Voice and/or TTS (Text-to-Speech), your favorite photos are brought to life! You can send them to your friends and colleagues using various output options. You can export your talking characters to HTML format for use on websites or export them to numerous media formats.

Getting Started - Creating a CrazyTalk Project

CrazyTalk allows you to compact all settings and related files into one project file instead of having to look for all your files scattered on your local machine.

Creating a blank project:

You may click the **New Project**  button to start a new project with only one model on a white background with no script present throughout the project.

Creating a new project:

1. [Create a model](#) by loading an image.
2. [Modify the script](#) optionally.
3. Click the **Save Project**  button. You are prompted to save the project.

Note:

- You may also use the **Add** button to save the project into the **Project Gallery**.
- You may also save your current project while on the **Model** or **Script** page.

Opening a project:

- Click the **Open Project**  button on the **Project** page.
- Double-click on the thumbnail in the **Template** or **Custom** gallery. Alternatively, select the desired project thumbnail and click the **Apply**  button to open the project.
- Double-click on the project file (*.ctp) to open it.

Getting Started - Creating CrazyTalk Models

You can create your own customized **CrazyTalk Models** using any digital snapshot of yourself, a picture of your friends, colleagues, family members, i.e. any photo from your digital camera.

► Creating Multiple CrazyTalk Models

Loading Image

There are two ways to load your image:

-  **Import Image:** Click to import a jpg, bmp, tga or png file with one or more faces to generate models.



-  **Camera Capture:** Click to take a picture with your web camera. Another panel will open for capturing an image.



Cropping, Rotating and Enhancing Imported Image

Image Processing is the first step of the wizard. You may also click the **Image Processing**  button to open the image processing tools and enhance the image after exiting the wizard.




-  **Crop Image:** Select the required image area.
-  /  **Rotate CW / Rotate CCW:** Rotate the image by 90 degrees in the clockwise or counter-clockwise direction.
-  **Mirror:** Mirror the image on the horizontal axis.
-  **Smart Level:** Adjust the color levels of the image automatically.
-  **Color Level:** Adjust the brightness, contrast, hue and saturation levels of the image manually. Use the sliders in the menu box to adjust the values or enter the numerical values for each parameter in the boxes next to the sliders.
-  **Color Balance:** Adjust the color balance manually. Drag the sliders to adjust the **Cyan - Red**, **Magenta - Green**, and **Yellow -Blue**

levels. Click **Highlights** to apply these color settings to emphasize the brighter areas. Click **Midtones** to apply these color settings to the entire image with average intensity. Click **Shadows** to apply these color settings to emphasize the darker areas in the image.

Face Fitting

The **Face Fitting** step is next. Click and move the indicators numbered 1, 2, 3, and 4 on the image to provide the four points for the fitting process as

displayed in the sample image. You may also click the **Face Fitting** button to start the **Face Fitting** step again after exiting the wizard to add or delete models.

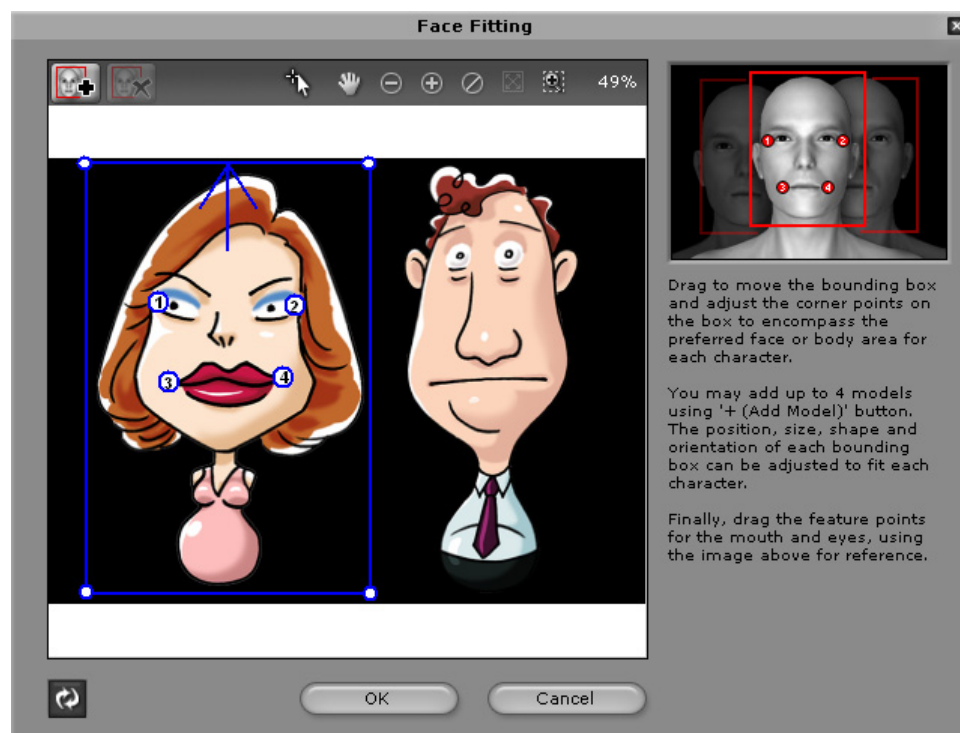

Adjust the four points as close to the correct position as possible to get the best fit for the eyes and mouth features.

If you merely want to have a single model in the project, please skip the following steps.

To generate multiple models (you may add up to four models):


1. Click the **Add Model**  button.
2. Drag on the image to select another character on the image. Please note that the top left corner of the cursor is the base for framing out a model.



3. Locate the four feature points again to best fit the new model's eyes and mouth features.
4. You may click on the target quadrilateral and click the **Delete Model**



button to remove the model.

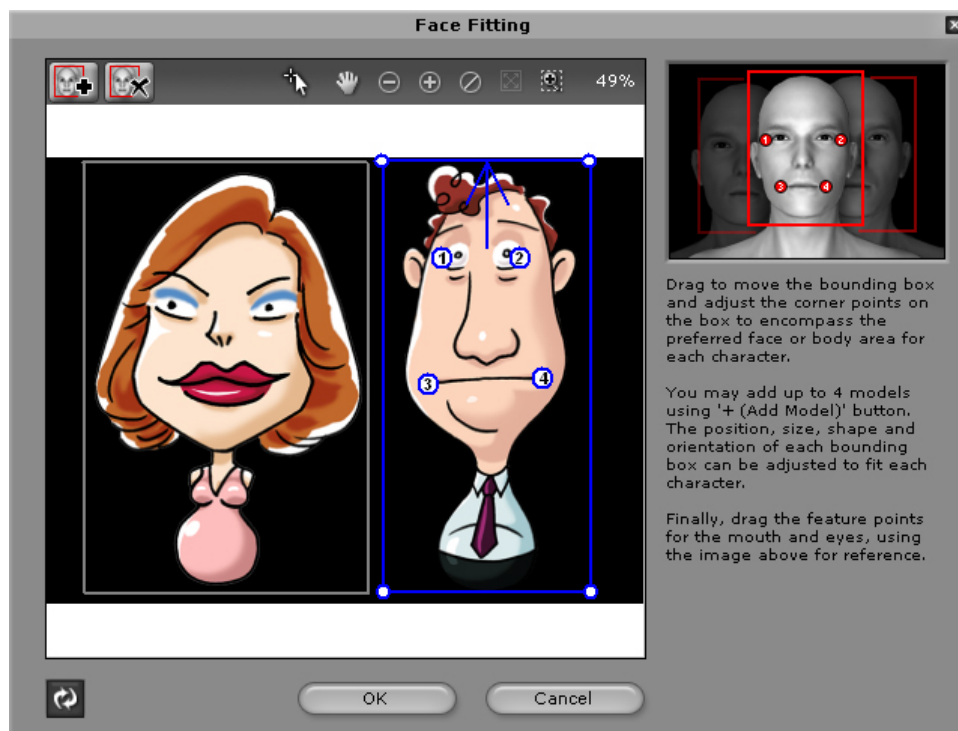


5. Click the **OK** button when you finish adding models and go to the next process.

(3D) Face Orientation

The **Face Orientation** step displays. Here you may assign different face styles to every model by clicking the model on the image and then selecting a suitable style.

You may also click the **Face Orientation**  button to invoke the **Face Orientation** step again after exiting the wizard to re-assign different face styles to each model.

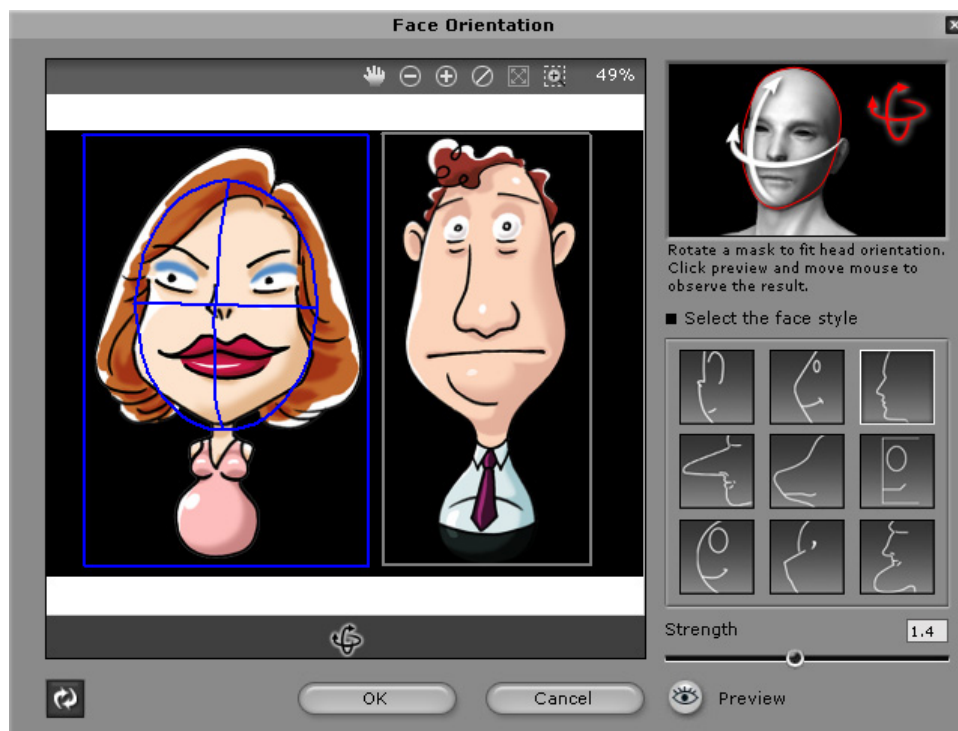

Utilize the  tool to rotate the oval wire to best fit the orientation of the face on the image. Do not worry if the wire does not perfectly fit the face on the image since this panel is only for deciding the rotation strength of the profile.

Strength: Drag the slider to adjust the movement strength of the profile as the model rotates.

Preview: Toggle this button and move your mouse around to see the effects of the **Strength** in the viewport. Toggle it again to leave the **Preview** mode.

Click the **OK** button to exit the wizard and go back to the model page with

the newly-generated models. You may click the , , and  buttons on the **Model** page to re-launch the panels above to change the settings.

► Detailed Model Editing

Separating Models from Background

Click the **Background Mask Editing**  button to modify the area of the image that reveals the background image, which does not move along with the talking models.

If you load TGA or PNG images with alpha channel, the alpha channel will be automatically converted into the **Background Mask**.



Note:

- The background mask, also known as the alpha channel, controls the transparency of TGA or PNG images.
- The mask is defined by the blue area.
- The mask does not actually show up on the model. It is for your reference only.
- Please make sure the mask does not cover any model.

-  **Full:** Extend the background mask over the complete image area.
-  **Clear:** Delete the background mask.
-  **Inverse:** Invert the background mask area. The area that was

previously defined as the background mask and the animated area are swapped.

-  **Paint:** Paint on the image to enlarge the background area or add more parts to it.
-  **Erase:** Paint to erase parts of the background mask.
- **Brush Size:** Drag the slider to adjust the size of the brush tool.
- **Mask Color:** Click and specify the color for the background mask via the color palette.
- **Opacity:** Drag the slider to specify the opacity of the background mask.
- **Contract/Expand:** Drag the slider to contract or expand the background mask.
- **Blur:** Drag the slider to blur the edges of the background mask.
-  **Preview:** View the results of your editing.

Fine Tuning Face Fitting in Wireframe Mode

CrazyTalk automatically generates a wire-frame surrounding the face according to the 4 points you set in the **Face Fitting** panel. You may click

Basic Facial Mode




or **Detailed Facial Mode**



to view the

wire-frame. Drag the control points or the lines to fit the character's face much more precisely in these two modes.

Please also use the       tools above the viewport to zoom in/out or pan the image to locate the points more precisely.

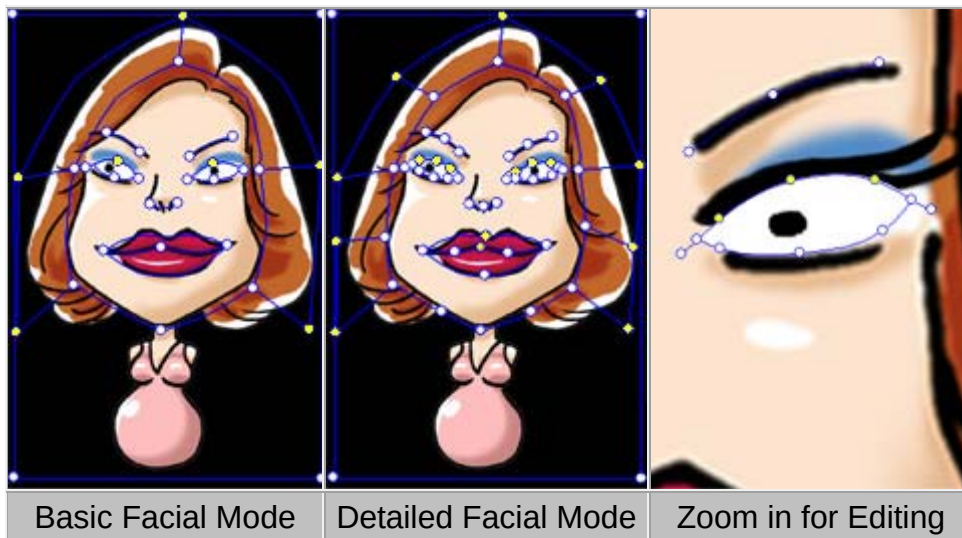

The wire-frame structure is divided into two parts, **Character Frame** and **Head Frame** (includes **Skull Mesh** and **Hair Mesh**).

Character Frame	Head Frame	
	Skull Mesh	Hair Mesh
		
• The character frame decides the range on the image to generate a model. • Cover the whole body of the character on the image with the character frame so the whole model can be transformed in the timeline editor.	• The skull mesh is used to frame out the skull, eyes, nose and mouth of the model. • The more proper the points are aligned, the better the facial animation the model presents.	• The hair mesh, also known as Pharaoh mesh, is used to frame out objects attached to the head such as hair, hat or long ears (of animals). • It prevents the image from breaking and increases the realism as the model rotates.

Defining Custom Background

Click the **Background Settings**  button to specify a solid color or an image as the background.



- **Color:** Click to specify a solid color as the background.
- **Background:**
 - **Original Background:** Use the background of the original image.
 - **Color Background:** Select this button to enable the solid color as background as specified in the previous step.
 - **Import:** Browse to your desired image and apply it as the background of your project. You may also specify the **Position** of the image in the background.



The Original Look



Define the background area (blue area)



Scene image imported as the background.





Result

Specifying Virtual Eyes

Click the **Eye Settings**  button to specify the settings for the **Eyes**.
Select one of the eye templates from the **Eye Style** drop-down list.




Click **Modify**. You may then adjust the position and the color of the **Eyeball**, **Eyelash**, **Eye Shadow** as well as the **Specularity** of the eyes.

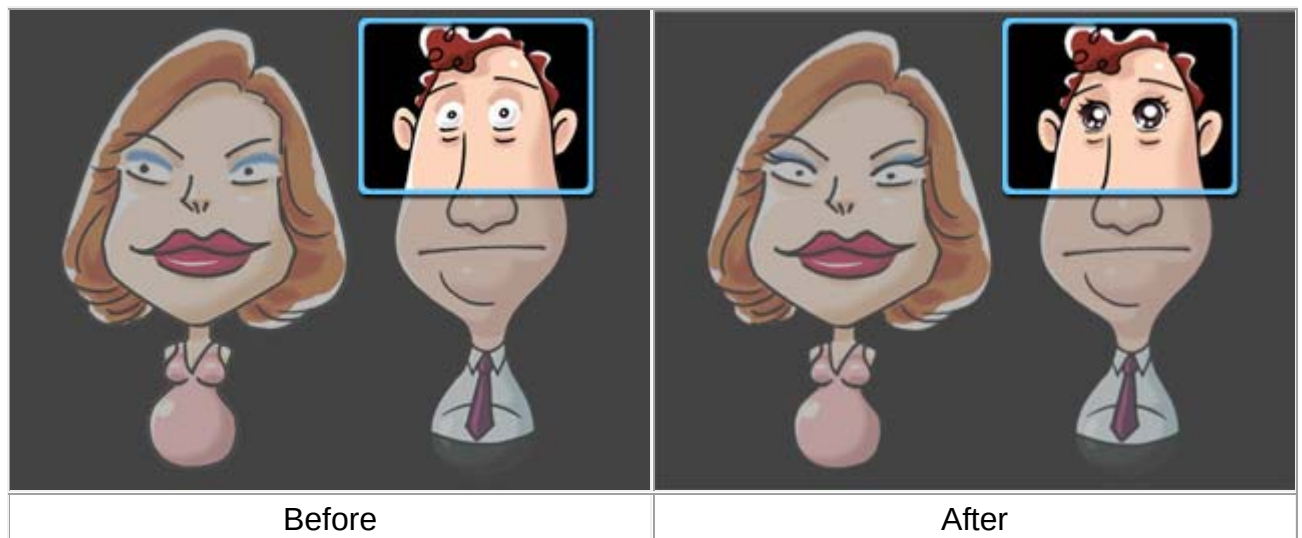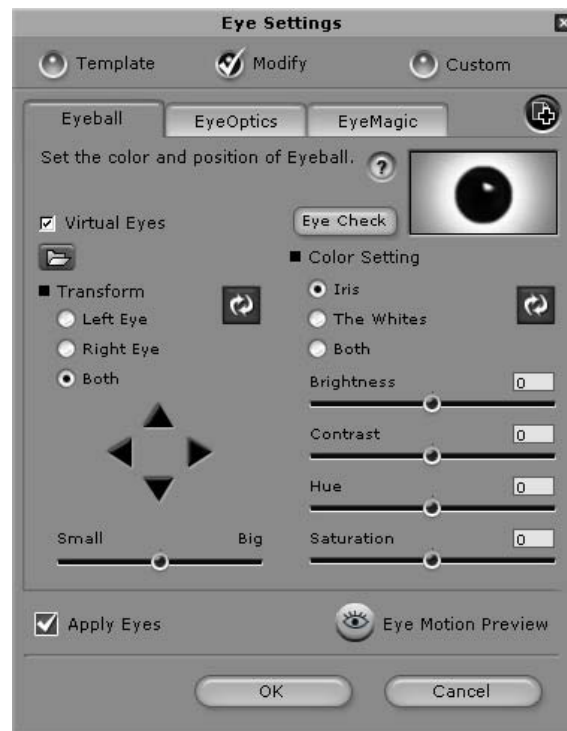

You may also click the **Import**  button to import custom images (JPG, BMP, TGA, PNG,) with or without alpha channel as the texture of the character's **Eyes** (256 pixels x 256 pixels).

Specifying Virtual Teeth and Inner Mouth Color


Click the **Mouth Settings**  button to specify the settings for the **Teeth**, **Mouth** and **Lips**.

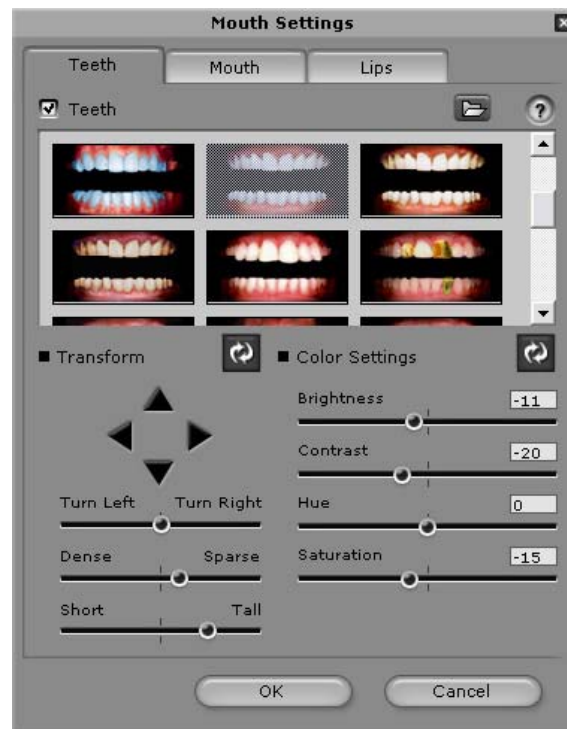

You may also click the **Import**  button to import custom images (JPG, BMP, TGA, PNG,) with or without alpha channel as the texture of the model's **Teeth** (256 pixel x 166 pixels).

Assigning Standby Motions

Pick the model and click the **Model Motion Settings**  button to assign different **Standby Motions** to individual models. The models' head will rotate when they are not speaking.

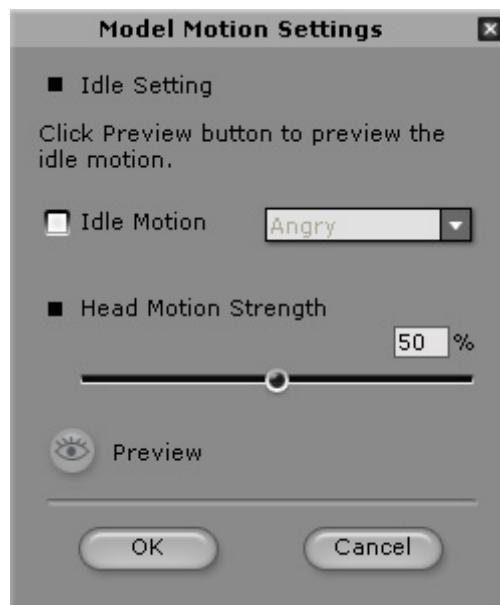

Getting Started - Creating a Stage

In **CrazyTalk**, you may add up to four models in a project. These models can then speak simultaneously or at different times. The **Stage** panel enables you to insert audio scripts for all the models in advance. You can set the total length of the project, arrange the timing of all the scripts, set the camera movement and add background audio for the whole project before you fine-tune the individual scripts of each model.

► Generate Empty Stage from Scratch




1. Click the **New Script** button to start a new empty stage.
2. [Generate models.](#)
3. Click **Script** at the top of the main program to toggle the Stage editor.



► Setting Project Length

The time display panel shows the **Project Length**, **Current Time** and **CTS Length**. You may type in the Project Length field to specify the length of the project.

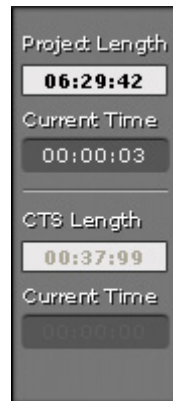


The image shows a vertical panel with four time-related fields. The first field is labeled 'Project Length' and contains the value '06:29:42'. The second field is labeled 'Current Time' and contains the value '00:00:03'. The third field is labeled 'CTS Length' and contains the value '00:37:99'. The fourth field is labeled 'Current Time' and contains the value '00:00:00'. The panel has a dark gray background with white text and light gray input boxes.

Project Length	06:29:42
Current Time	00:00:03
CTS Length	00:37:99
Current Time	00:00:00

► Adding Scripts


If you wish to add scripts to models, you may follow any of the methods below:

- **Right Click** - Right click on the target model track and select the entries to insert a new talking script.

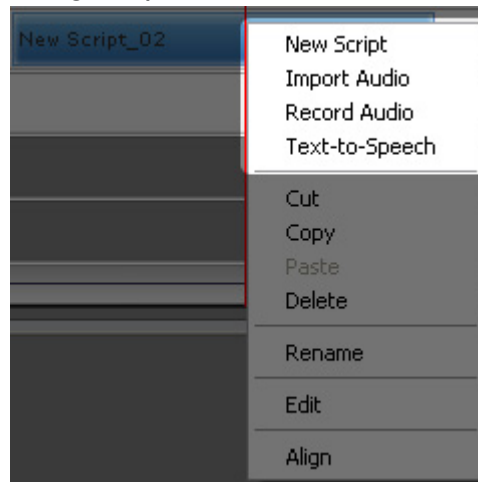


- **Utilizing Tools**

1. Click inside the target model's track to set the start time of the script.
2. Use either tool to add a new script for the target model. For more information, please refer to [Adding Model Audio](#):

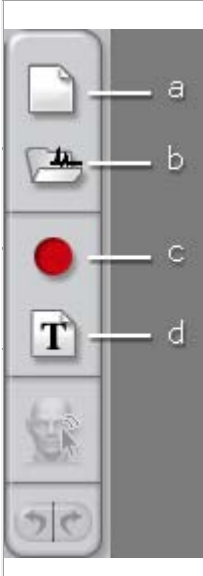	a. New Script: Click this button to add one blank script into the model's track. The default length of the new script is 15 seconds.
	b. Import Audio: Click this button to import a pre-recorded speech files in PCM WAV/MP3 format.
	c. Record Audio: Click this button to record voice via microphone installed on your system.
	d. Text-to-Speech: You may convert typed text into speech with this feature. Note: You can download additional text-to-speech voices from Microsoft or browse the Reallusion website for more information.

- **Utilizing Templates** - Drag and drop a template from the Script / Template or Custom library to the target model's track at the desired time.

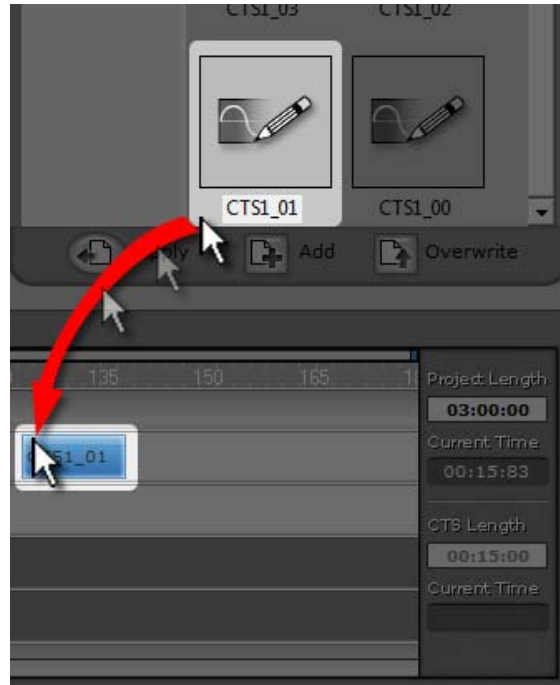


The illustration below displays the stage after talking scripts are added.




Note:

- Please refer to [Creating a CrazyTalk Script](#) for more information about modifying the talking scripts on the stage editor.

► Setting Camera Movements

CrazyTalk's camera feature allows you to zoom in on the models as they are speaking to generate dynamic camera movements. Press the **Camera Editor**  button above the **Stage** to invoke the **Camera Editor** panel.

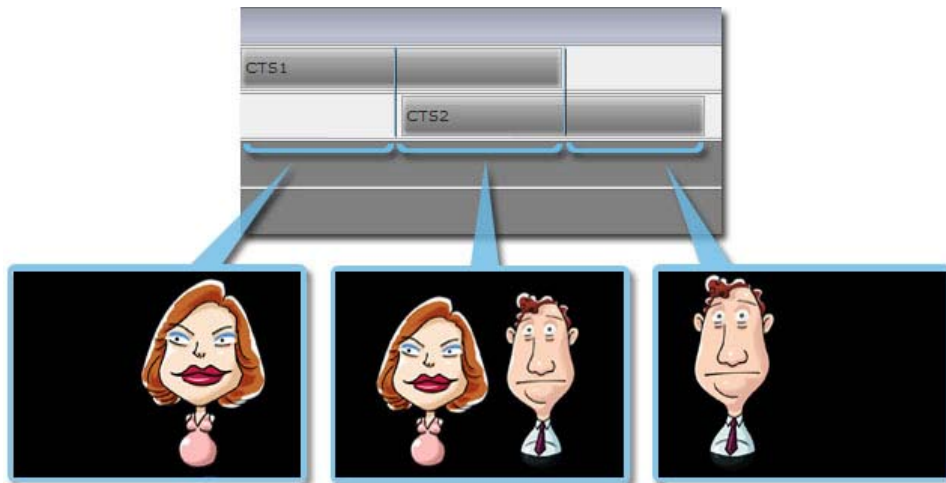

- : Toggle one or more buttons to define the moving method of the camera. Drag on the **Interactive Area** to move the camera to desired location and angle, click the **Set Key** button to add the result as a key into the **Camera** track in the **Stage** panel.
- Click the **Default Key** button to initialize the position and angle of the camera to the origin.
- Click **Resume** to abort any adjustment has made since the **Set Key** was last clicked.
- **Auto Zoom**: Check this box and the camera zoom in to shoot a close-up for the speaking models automatically. This feature prevents you from repetitively setting camera transform keys on the **Camera** track.

► Importing Background Audio

Click the **Background Audio**  button to load a prepared audio file as the background audio for the entire project. You may then set the Fade In, **Fade Out** effects for the audio.



1. Click the **Browse** button to import a song or musical track in PCM WAV/MP3 format.
2. Move the **Volume** slider to adjust the volume.
3. Check the **Fade In** or **Fade Out** options to specify if you want the background audio to fade in or out respectively.
4. Click the **Preview** button to listen to the background audio.

Getting Started - Adding Model Audio

The **Script** page is the critical phase in **CrazyTalk** process of creating a talking message. Here you decide what and how your model talks and specify the expressions, facial movements and special effects that go along with the animated script.

Note: You can download additional text-to-speech voices from [Microsoft](#) or browse [Reallusion website](#) for more information.

► Adding Model Audio

- Click the **New Script**  button to start a new script without any keys. The length of the new script is 15 seconds by default.
- To import WAV/MP3 files, click the **Import Audio**  button to import a speech file in PCM WAV/MP3 format. Specify the name and location of the WAV/MP3 file using the dialog box and click **Open** to open the file.
- To record sound, click the **Record Audio**  button. Then click the **Record** button to start recording. Recording from the specified audio source starts.
- To convert text to speech, click the **Text-to-Speech**  button.
 1. If you have more than one TTS engine installed, you may need to select the engine first.
 2. Type the text in the editor window.
 3. From the **Voice Mode** drop-down list, select the type of voice to be used by the model for speaking.
 4. Adjust the voice by using the **Volume**, **Pitch**, and **Speed** sliders to achieve the desired effect. Click the **Preview** button to play back the result. Click the **OK** button when done.

Getting Started - Creating a CrazyTalk Script


The **Script** page is the critical phase in **CrazyTalk**'s process of creating talking images. Here you decide what and how your models talk and specify expressions, facial movements and special effects that go along with the animated script.

Note: You can download additional text-to-speech voices from [Microsoft](#) or browse [Reallusion website](#) for more information.


► Modifying a Talking Script

There are three methods to modify a talking script:

1. Double-click or right-click (select **Edit** in the right menu) on the target script in the [Stage](#).

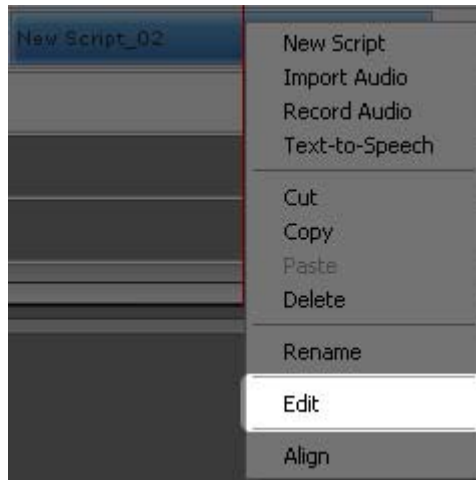

2. Select a script in the track and click the **Timeline** tab in the [Stage](#) panel.
3. In the **Timeline Editor**, select the target script in the script drop-down list.

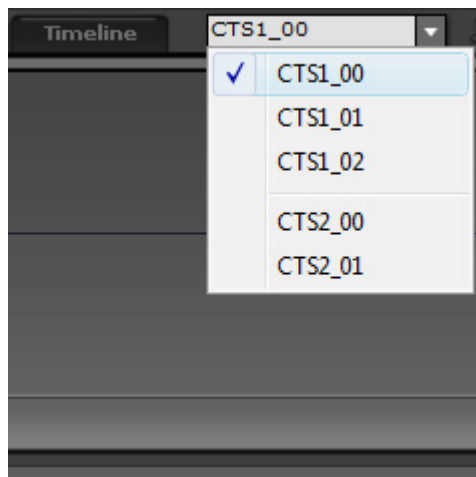

► Adding Expressions to a Talking Script

There are 3 methods to add expressions to a talking script:

A. Emotives Library

Click the **Emotives** tab to view a set of basic templates such as sad, angry, happy, and more. Double-click on the desired template to apply it.

You can adjust the strength of the expression on the model's face by using the  slider.

B. Motion Clip Gallery

Drag-and-drop the desired template from the **Motion Clip** gallery. (These templates contain expressions and special effects)



To create a custom motion clip, drag to select the desired portion in the

Motion Clip track and click the **Group**  button.

C. Utilizing Puppeteering Panel

Click the **Puppet Control**  button to invoke the **Puppeteering Panel**

to create custom motion clips. A motion clip will be overlapped as the top layer of the Face, Transform, Eyes or Shoulders tracks.

Select a Puppet Profile and full face control, click the **Preview** button and press the **Space bar** to view the result. Click the **Record** button when you are satisfied with the settings.



Pick a desired profile and click the **Record** button, then press the **Space bar** to start recording the motion clip. Move your mouse to move the model, the movements will be recorded simultaneously. Press the **Space bar** again to stop recording.

Note:

- If you wish to temporarily turn off the camera effects, you may toggle the **Camera On/Off** button. Turning off the camera effects with this button does not affect the result of exporting media files.
- Click the **Add** button to add the desired motion clip into the motion clip track.
- Alternatively, you may drag and drop the desired motion clip from the motion clip gallery onto the **Motion Clip** track.

Getting Started - Output

On the output page, you may export your project for **Video**, **Widget**, **Web**, or **YouTube**.



Select the desired media type from the four tabs.

Output Format:

Tab	Video	Widget	Web	YouTube
Available Format	• AVI • MP4 • RM • Sequenced BMP, TGA and PNG • WMV • WAV	• iWidget	• Flash • RM • WMV	• FLV

Note:

- If you want to export into the WMV file format from **CrazyTalk**, you will need to first download and install **WMVEncoder9** from the Microsoft website.


General Output Settings - Video, Widget and Web

- Check the **Export Specified Section** option if you only want to export a specific part of the project.
 - Select the **Target Resolution** option if you want to specify your own target resolution. Select the desired resolution from the drop-down box. You can select from DVD or VCD with PAL or NTSC formats.
 - Click the **Background Color** box to select the background color from the color palette.
 - Specify your own desired resolution for the output frame by entering the height and width in pixels in the **Output Size** boxes.
- Enter the desired frame rate in frames per second in the **Frame Rate** box.

Quality Settings - Widget and Web (Flash)


If you are in **Widget** or **Web (Flash format)** mode, you may need to modify the **Quality Settings** for video and audio.

(Click the **Advanced** button in **Web (Flash format)** to show the **Quality Settings** panel.)

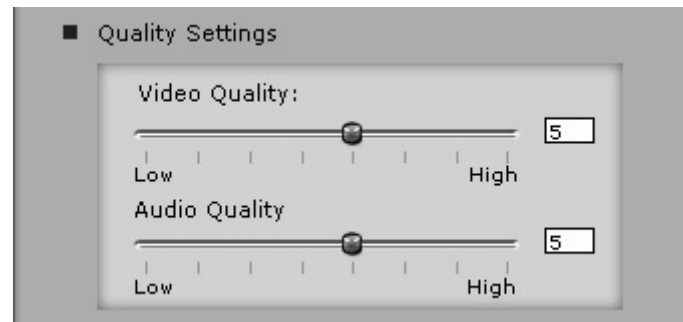

HTML Settings - Web

The HTML options are available if you are in **Web** mode:

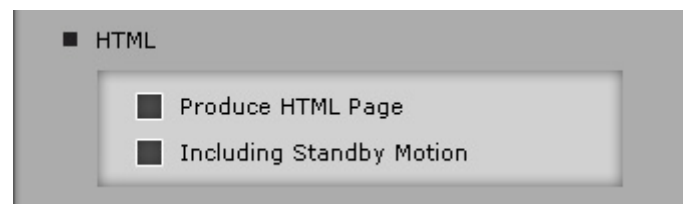


Check the **Produce HTML Page** to create an HTML page with the media content (Flash, RM and WMV) embedded in the file. The HTML file is saved in the same location as the media file.

Check the **Including Standby Motion** so the model possesses standby motions when the media is not played.

YouTube Settings

You may need to apply for a **YouTube** account to directly upload your **CrazyTalk** project to **YouTube**.

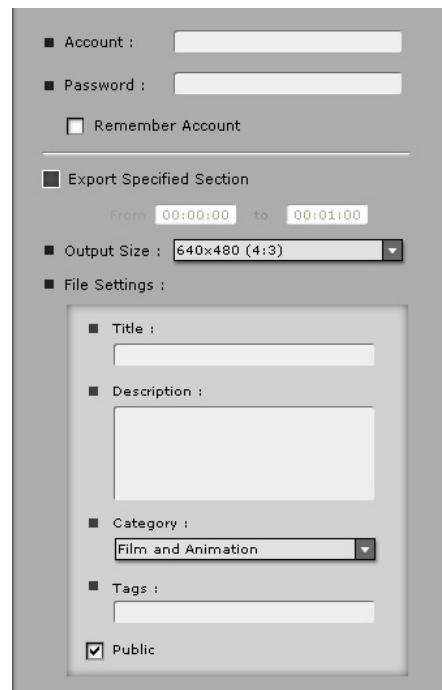
The image shows a 'YouTube Settings' dialog box with a grey background. It contains several sections: 'Account' with fields for 'Account' and 'Password', and a 'Remember Account' checkbox; 'Export Specified Section' with a 'From' and 'to' time range (both set to 00:00:00); 'Output Size' with a dropdown menu showing '640x480 (4:3)'; and 'File Settings' which includes fields for 'Title', 'Description', 'Category' (a dropdown menu showing 'Film and Animation'), 'Tags', and a 'Public' checkbox that is checked.

- Type in your **Account** and **Password**. You may check the **Remember Account** checkbox so you don't need to re-type it next time for uploading.
- Specify the **Output Size** from the drop-down list.
- In the **File Settings**, type texts into the **Title**, **Description** and **Tags** fields.
- Choose a **Category** from the drop-down list so other users may easily find your video.
- The **Public** checkbox defines if you wish your video to be public or private on **YouTube**.
- Click the **Go to YouTube**  button to open the **Log on** page of **YouTube** in your internet browser.
- Click the **Upload**  button to start uploading the project to **YouTube**.

CREATING A CRAZYTALK PROJECT

Introducing the Project Page

You may save your creation as a project file to continue modifying whenever you want. Built-in and custom projects are stored in the **Project Gallery** for you to easily apply.

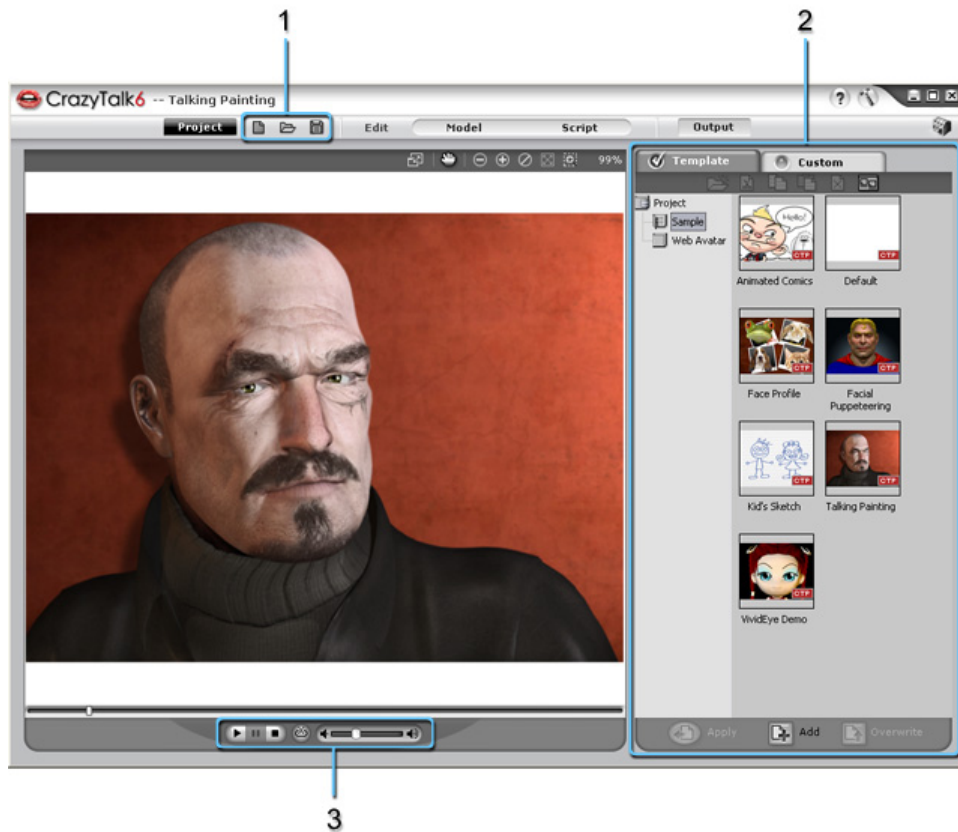


1. New/Open/Save	•  : Click to create an empty new project file. •  : Click to browse to and open a desired project file. •  : Click to save the current project as a file.
2. Project Gallery	•  : Click to apply one of the project files from the Template or Custom tabs. •  : Click to add the current project into the Custom tab. •  : Click to overwrite the selected project in the gallery with the current project.
3. Playback Control	•  : Playback script. •  : Pause playback of script. •  : Stop playback of script. •  : Loop playback of script. •  : Adjust volume.

New Project

To start a **CrazyTalk** project from scratch, you may:

- Click the **New Project** button on the tool bar.
- Double-click on the **Default** (empty) project thumbnail from the gallery.

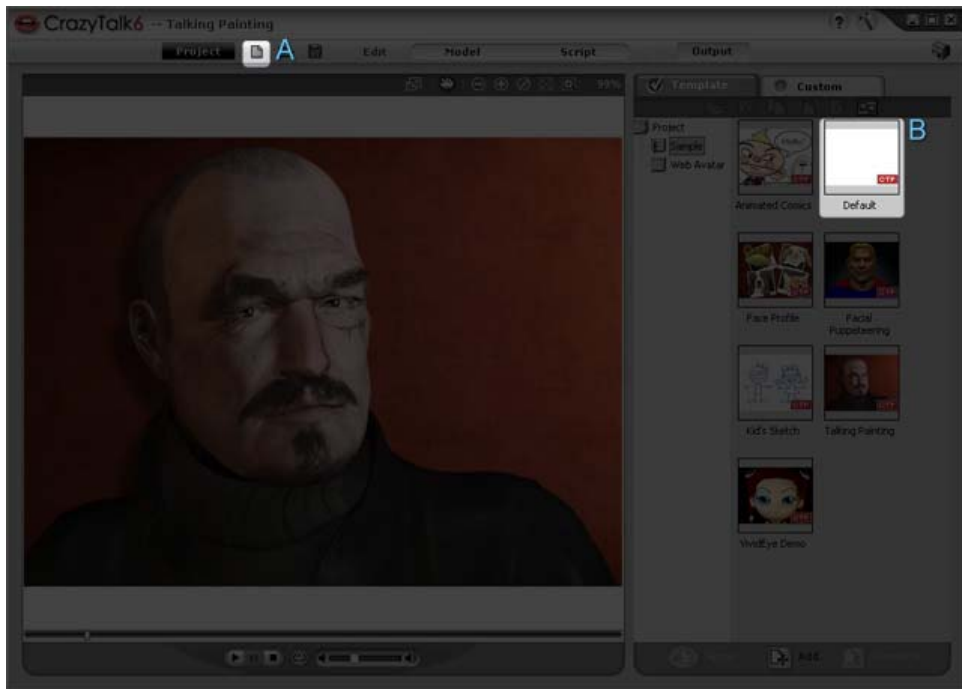

Note:


- If you do not want to start from a new project, simply load the head models from an existing project. The talking scripts are kept, and vice versa.

Setting Custom Default Project

In **CrazyTalk**, you may set any project as the default and **CrazyTalk** will load that project whenever you launch **CrazyTalk** afterwards.

Setting a Default Project

1. You need to create and [Save a Project](#) first.
2. Switch to Project page.
3. Browse the **Project Gallery/Custom** to display the project saved in step 1.
4. Right-click on the thumbnail of the project.
5. Select **Set Default Project** in the pop-up menu.

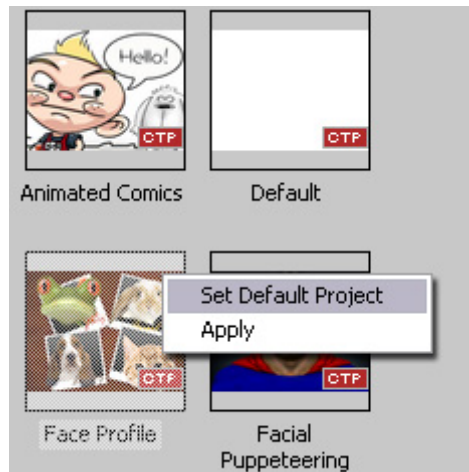

Re-launch **CrazyTalk** and the new default project will be loaded.

Note:

- Every project saved in the **Project Gallery** can be set as the default project.
- You may set a project as the default project in which the model or models are with/without script.

Saving a Project


Please load an image and (optionally) modify the script for the model before saving.

Save on the Project page

1. Select the **Custom** tab in the project gallery.
2. Pick the target folder.
3. Click the **Add**  button to save the current project.

Save on any page

1. Click the  button anytime on any page. The **Save As Project File** dialogue will appear.

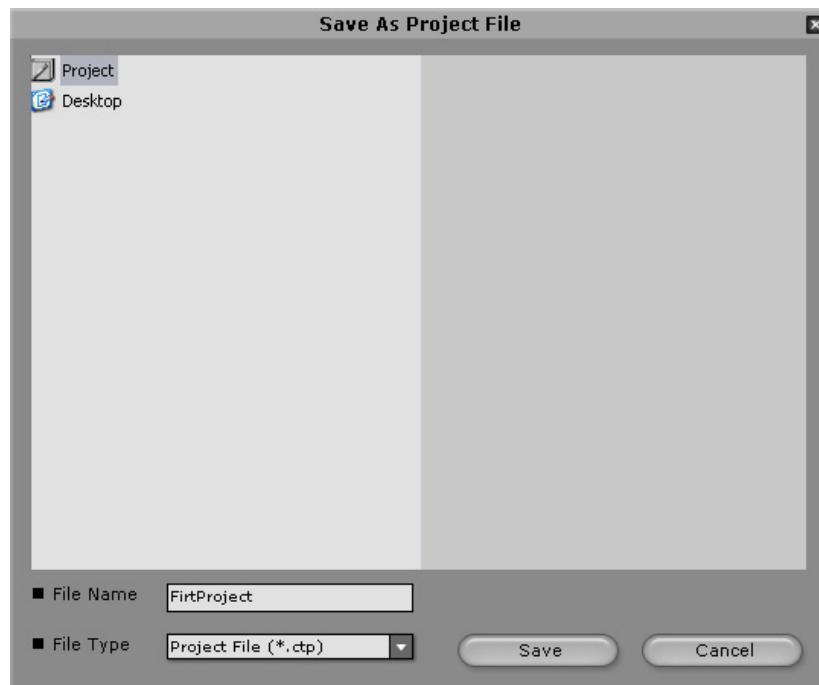

2. Specify the name for the file, select the desired folder and click **Save**.

Note:


- If you click the **Save Project**  button with the **Ctrl** key pressed down, **CrazyTalk** saves the **model** of each frame in **JPEG** format, which can decrease the size of the project file.
- If you click the **Save Project**  button with the **Shift** key pressed down, **CrazyTalk** saves the **SFX** images of each frame in **BMP** format, which can accelerate the saving speed but increase the size of the project.
- Opening and saving (with the **Ctrl** key pressed down) one project file repetitively will cause the quality of the **model** to decrease since **CrazyTalk** opens the project in **BMP** format but saves in **JPEG** format.
- You may create subfolders under the **Project** or **Desktop** by clicking the  button in the **Project Gallery/Custom** tab.
- **CrazyTalk** prompts you whether you want to save the unused script clips in the disabled character tracks on the stage. If you decide to save them, the clips can be reused when another model is added. This will cause the file size increase however.




CREATING CRAZYTALK MODELS

Introducing the Model Page

The Model page in **CrazyTalk** provides the starting point of the application. The interface features tools for image selection, image processing, wire frame fitting, profile style setting, standby motion, background mask editing, and background with camera movement. Once you select an image to be used as the model, you can use the image processing tools to enhance the quality of the image. You can then use the fitting tools to fit a wire frame to the image. This creates the talking image which can then be animated with a script along with gestures and expressions for creating a talking message. **CrazyTalk** provides 9 types of profiles to fit the models according to their characteristics. Changing the background image and specifying if the image moves along with the camera or the movement of the model is simpler than ever.

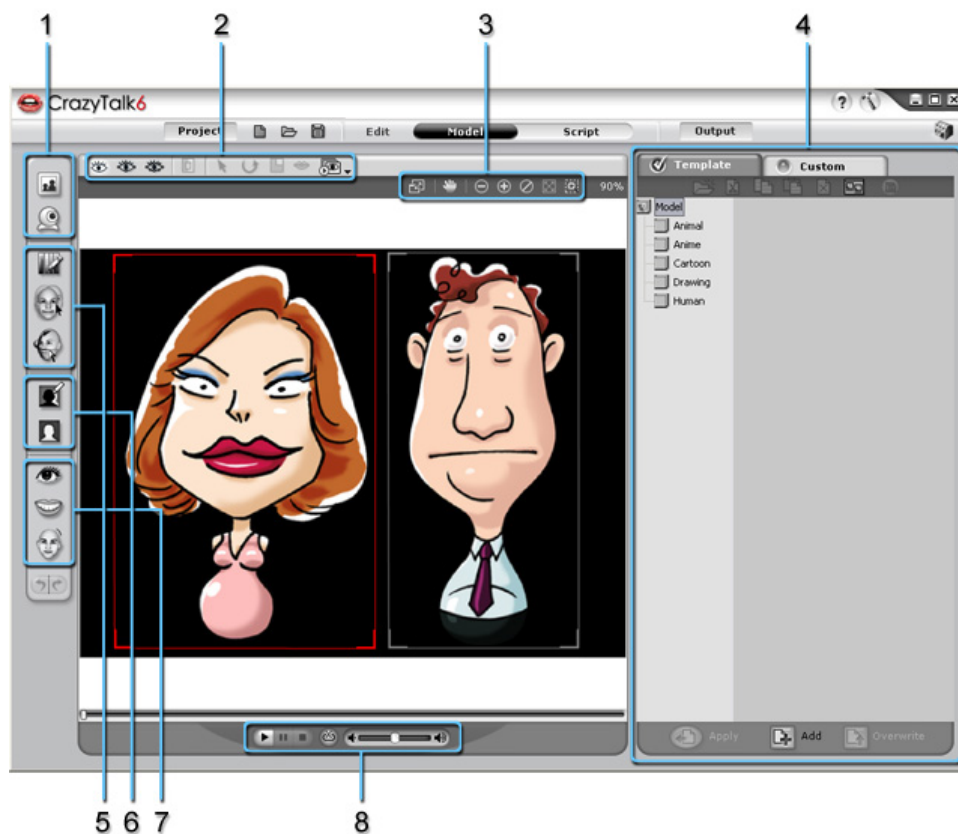

1. Import Image	 : Import image from a file or folder on your PC.  : Capture an image from your web camera if installed.
2. Fitting Tools	 : Preview Mode - Preview the results of the wire frame fitting function.  : Basic Facial Mode - Modify the wire frame using 23 anchor points.  : Detailed Facial Mode - Modify the wire frame using additional anchor points.  : Change Wireframe Color - Change the color of the wire frame to a color of your liking.  : Move the wire frame or frame components.  : Rotate the wire frame or frame components.  : Resize the wire frame or frame components.  : Open/Close Mouth Points - Open/Close the mouth points of the model.  : Calibration - Click to view the demo for various movements of facial parts.

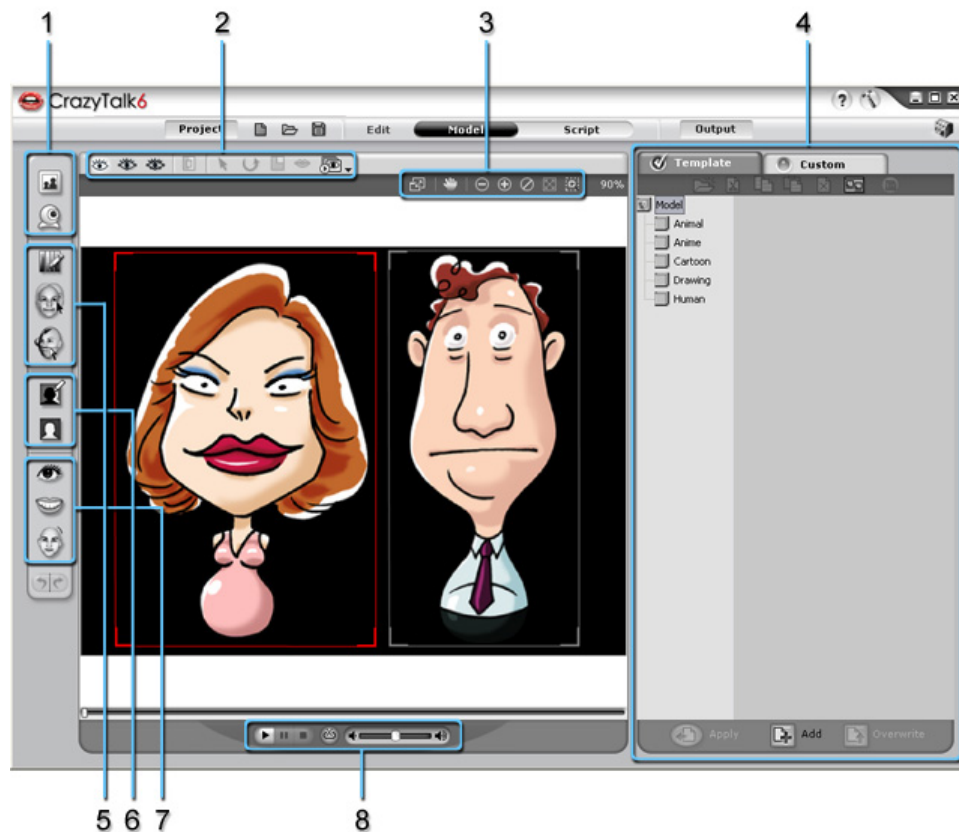

3. Viewing Tools



: Full Screen View - Display image in full screen view.



: Zoom In - Enlarge image to increase clarity.



: Zoom Out - Reduce magnification to increase the area of visibility.



: Hand - Pan across the image.



: Fit to Window - Resize image to fit it in viewing window.





: Original Size - Display image at original size and magnification.



: Drag Zoom - Drag a marquee across the image and enlarge the selected area.

4. Model Gallery	 : Create a new folder.  : Cut the model file.  : Copy the model file.  : Paste the model file.  : Delete the model file.  : Toggle between thumbnail and list mode.  : Save image as Face JPEG image.  : Apply model.  : Add image to custom models gallery.  : Update changes to the selected model file in the model gallery.
5. Image Processing and Fitting	 : Image Processing - Crop, rotate, mirror the image, automatic color adjustment, set color levels and color balance.  : Auto-fit Anchor Points - Automatically fit four anchor points to create the basic wire frame.  : Face Profile Style - Specify the profile style of the model and set the standby motion.
6. Background Tools	 : Background Mask Editing - Edit the background mask to specify the region of the image that does not move.  : Background Settings - Customize the background by specifying a color or choosing a background image.

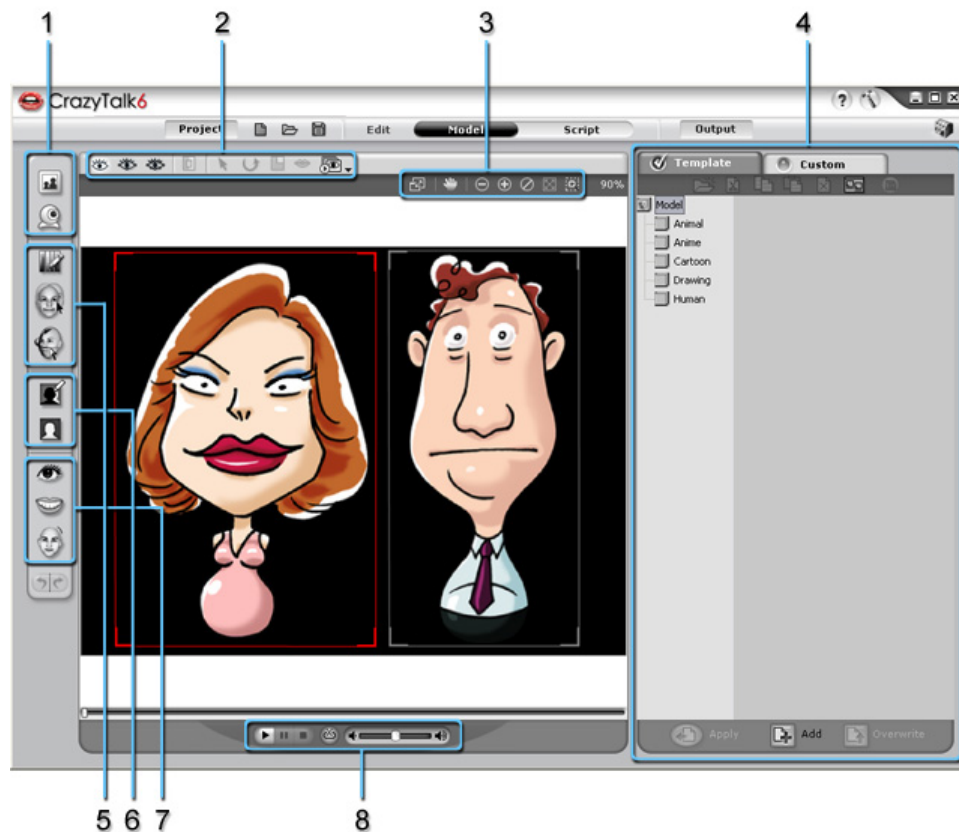

7. Advanced Facial Settings	 : Eye Settings - Contains advanced settings for eyeballs, eyelashes, eye shadows and specularity.  : Mouth Settings - Contains advanced settings for teeth, oral color and lips position.  : Idle Settings - Set idle motion and the strength of it for each model.
8. Playback Control	 : Play back the script.  : Pause playback of the script.  : Stop playback of the script.  : Loop the playback of the script.  : Adjust the volume.

Selecting an Image

You can select an image to create a model by importing an existing image from a file/folder, or by using one of the models from **CrazyTalk**'s image gallery. You can also save your models as customized models and re-use them for future projects.

Note:

- The maximum size of the source image is eight million pixels.

Loading Image

To choose an image to create a model, do one of the following:

- Click the **Import Image**  button to import a jpg or bmp image. The **Open** dialog box appears. Browse to select a photo or an image file you would like to use. Click the **Open** button to open the sample file.
- Click the **Camera Capture**  button to take a picture with your webcam.



1. Select the webcam you wish to use from the **Device** drop-down list. (If your web camera is not on the list, please click the **Refresh** button to refresh the device list)
2. Specify the resolution from the **Resolution** drop-down list.
3. Click the **Capture** button to take a picture with the selected webcam. (The content of the preview window will be captured and displayed on the right pane)
4. Click the **OK** button to confirm the captured image and exit.

Image Processing

The image processing tools allow you to enhance the quality of the selected image, rotate it, or crop it to use only a portion of the original source image. This allows you to focus specifically on the facial details within an image and results in more accurately talking images.

Click the **Image Processing**  button to open the image processing tools and enhance the image.



You can then use the tools on the left side of the image processing menu to adjust the area, quality, and color settings of the image as follows.

Cropping an image

Click the **Crop Image**  button to select only the required image area. This can be useful when you want to select a face from a group photo or remove a large background area which is not needed for the model. Cropping the image allows you to remove excess background area and enlarge the facial image you wish to turn into a moving image. This does not change the original image size.

Drag a marquee across the image using the mouse to create a crop box. Use the corner handles of the marquee to rotate the crop box. Use the mouse to move the crop box across the image as desired. Click the  button when done. Click the  button to cancel the current crop box and restart.

Rotating an image

Click the **Rotate CW**  or **Rotate CCW**  button to rotate the image by 90 degrees in the clockwise or counter clockwise direction.

Mirroring an image

Click the **Mirror**  button to mirror the image on the horizontal axis. This function is useful for images obtained from scanners or cameras.

Adjusting color levels automatically

Click the **Smart Level**  button to adjust the color levels of the image automatically. CrazyTalk analyzes the color levels and adjusts the brightness, contrast, hue, and saturation levels to achieve optimum image quality.

Adjusting color levels manually

Click the **Color Level**  button to adjust the brightness, contrast, hue, and saturation levels of the image manually. Use the sliders in the menu box to adjust the values or enter the numerical values for each parameter in the boxes next to the sliders.

Adjusting color balance

Click the **Color Balance**  button to adjust the color balance manually. Drag the sliders to adjust the **Cyan - Red**, **Magenta - Green**, and **Yellow -Blue** levels. The box next to each of the respective properties shows positive or negative values depending on the position of the slider, with the center being zero. Select the **Highlights** radio button to apply the color settings to the image's brighter areas. Click the **Midtones** radio button to apply the color settings to the image's regular areas. Select the **Shadows** radio button to apply the color settings to the image's darker areas.

Creating Multiple Heads


Your desired photo or image might contain one or more persons. With earlier versions of **CrazyTalk**, it was necessary to use a video editor to combine several videos with one speaker into a conversation.

In **CrazyTalk 6**, however, you may add up to four models to generate scenarios with conversations, which facilitates the creation of a conversation without another video editor.


Basically, every project always possesses at least one model. If you wish to add more models, please follow the steps below:

Creating Multiple Heads

1. Click the **Model** button at the top of the main program.

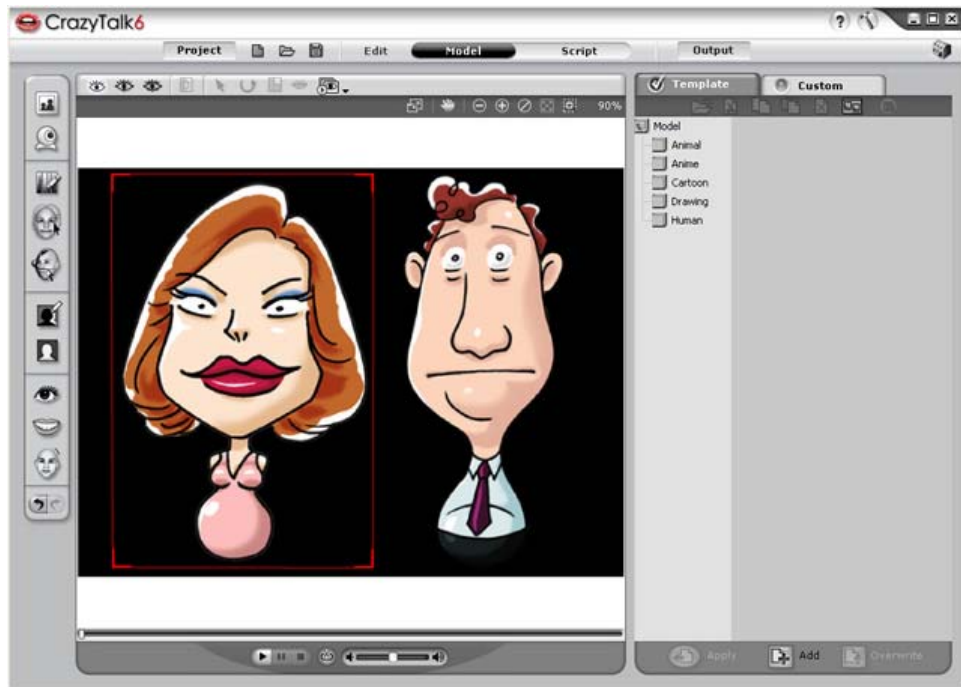


2. Click on the **Face Fitting**  button.
3. The **Face Fitting** panel displays.

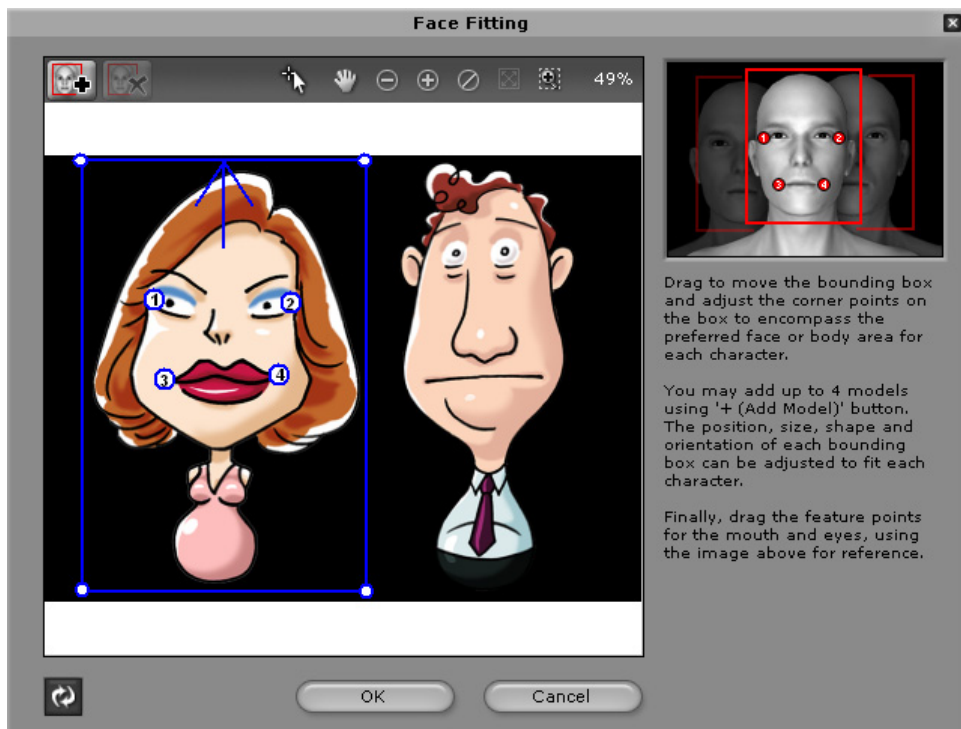

4. Click the **Add Model**  button.

5. Drag on the preview window to frame out the range for another model (you may repeat the steps to create up to four models).

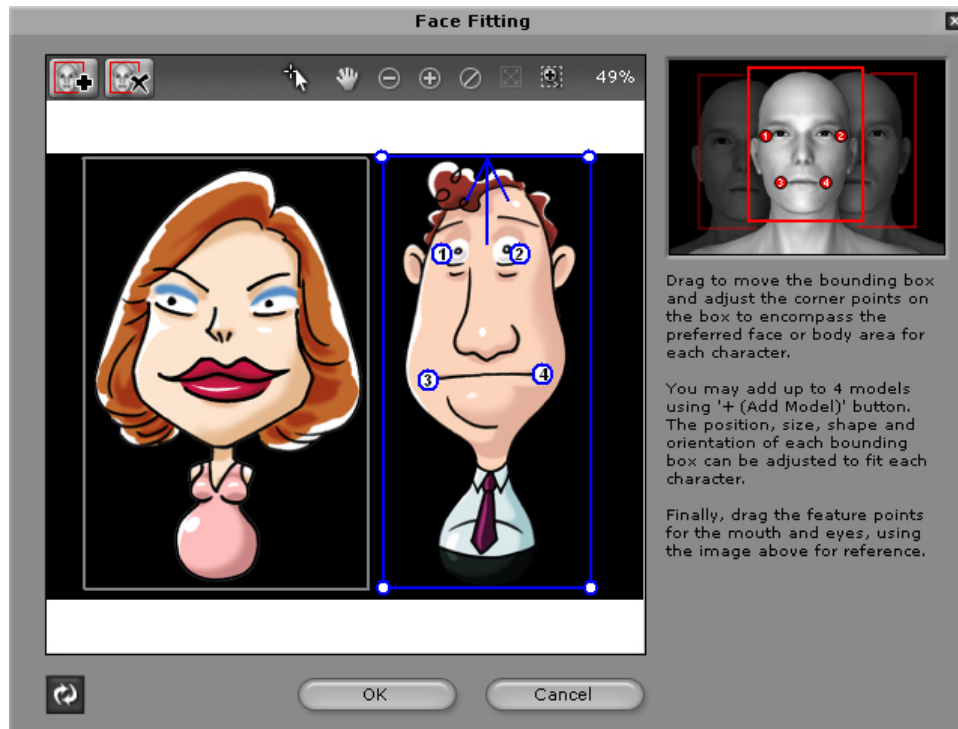

6. Click the **OK** button to confirm and exit.
7. More models are generated on the **Model** page.



Picking Target Model

To select a model:

- In **Preview Mode** , click on the target model directly to select it.
- In **Basic Facial Mode**  or **Detailed Facial Mode** , click on the **Select**  tool before selecting the target model.

Note:


- Please refer to the following sections for more information:
[Wire Frame Mode – Character Frame and Head Frame](#)
[Editing the Background Mask](#)
[Defining Background Mask for Entire Character](#)
- The frames of the models are not allowed to overlap with each other.

Automatic Image Fitting

The 4-point auto fitting for the four basic anchor points allows you to create a **CrazyTalk** model in a matter of a few mouse clicks. This process is entirely automatic and requires no complex frame fitting techniques. Once you create a basic frame to fit the face, you can use the fitting tools to increase the accuracy of the wire frame by adjusting the frame points with more precision.



Click the **Face Fitting** button to fit the wire frame to the face automatically using the four basic anchor points for the eyes and mouth. The following auto-fitting dialog box pops up.

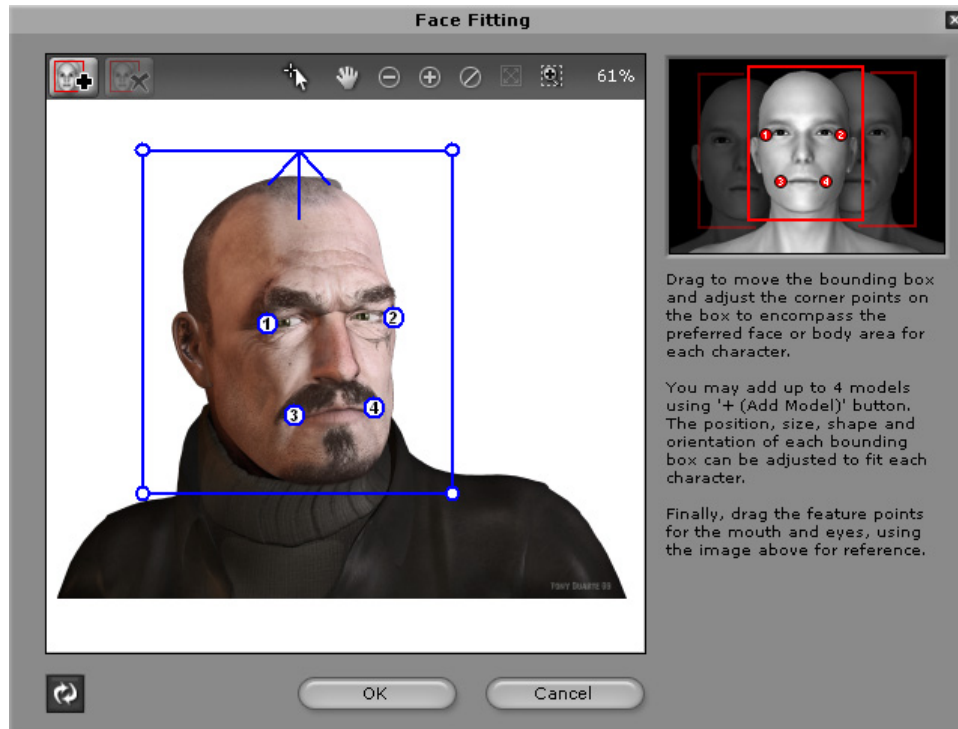


CrazyTalk shows its own estimation about the position of the four points defining the eye and mouth positions. If you are not satisfied with the positions, click and move the numbered indicators 1, 2, 3 and 4 on the image to adjust the four points for the fitting process as displayed on the sample image. Click the **Reset** button at any time to cancel your actions and start over.

Note:

- Adjust the four points as close to the correct position as possible to get the best fit for the eyes and mouth features. Do not worry about precise details at this time. Use the [wire frame fitting tools](#) for a more accurate wire frame to fit the face with the highest degree of precision.


Specifying Face Orientation and Style

Click the **Face Orientation**  button to adjust the profile style and define the face orientation of the model:

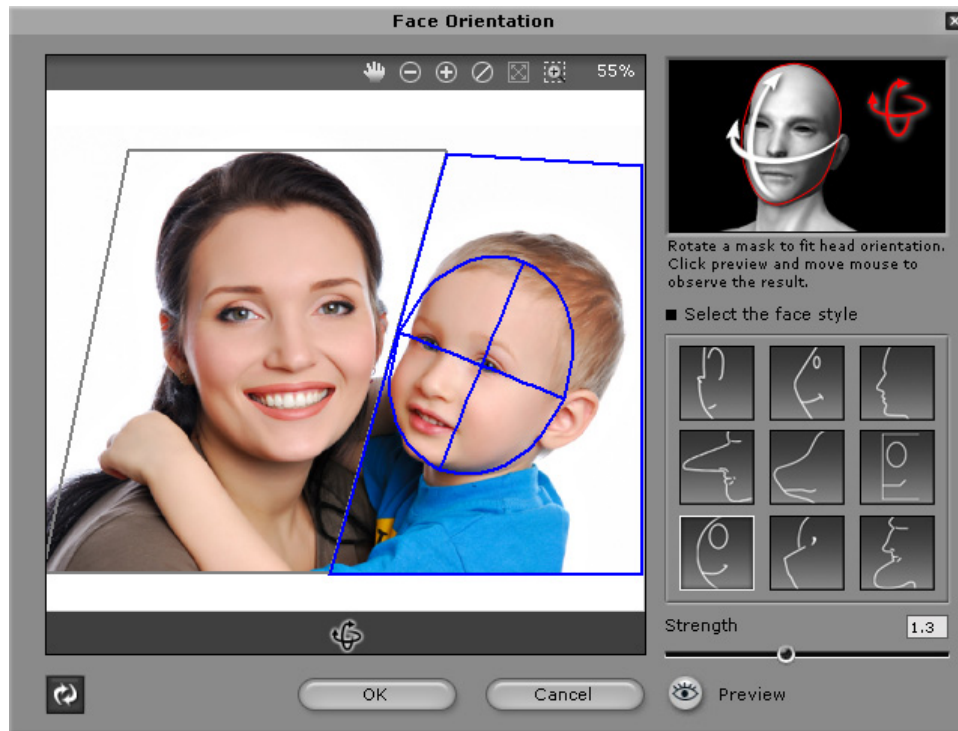

► Defining the 3D Face Orientation

Utilize the **Rotate**  tool to fit the angle of your model's face. It ensures the 3D mesh of the head to match the facial angle of the character in the photo to generate the best result of the head rotation animation.

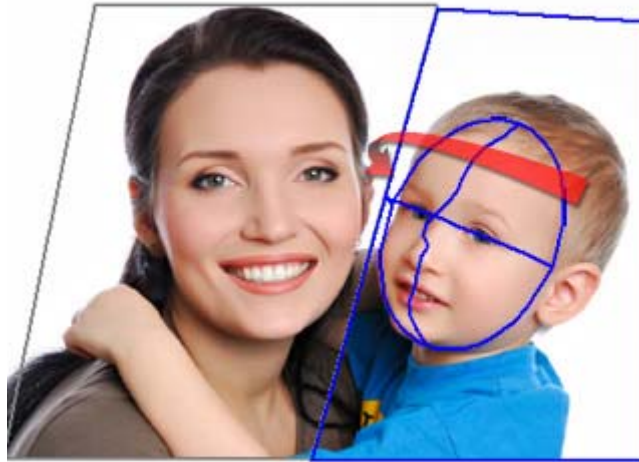

Rotate the mesh to fit the face angle


► Selecting Appropriate Face Style

1. Select one of the 9 basic profiles to fit your model in the loaded image.



2. Drag the **Strength** slider to adjust the intensity of the profile. The higher the value is, the more accentuated the profile will be, as well as the motion of the model.
3. Press the **Preview** button and move your mouse to preview the head motion in the main viewport. If the motion is not as desired, re-adjust the **Strength** value or try another profile style.

Examples:

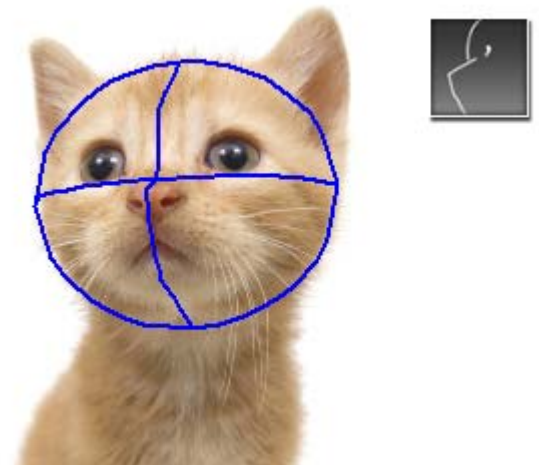

Wire Frame Mode - Character Frame and Head Frame

CrazyTalk automatically generates the wire frame surrounding the face according to the 4 points you set in the **Multiple Models** panel. The points and lines define the model's range in the image and how the facial features of the model in the photo are mapped to the ones of the 3D virtual head.



► Character Frame and Head Frame

The frame of a model can be divided into two parts, **Character Frame** and **Head Frame**.

Character Frame

The character frame (quadrilateral wire) defines the **Primary Mask** of the project. Whenever you replace the background with a solid color or an image, the primary mask retains the color of the original image.

Please ensure that the character frame covering the whole head and body defines only the correct character transformation area, and that the facial animation does not exceed the effective range.

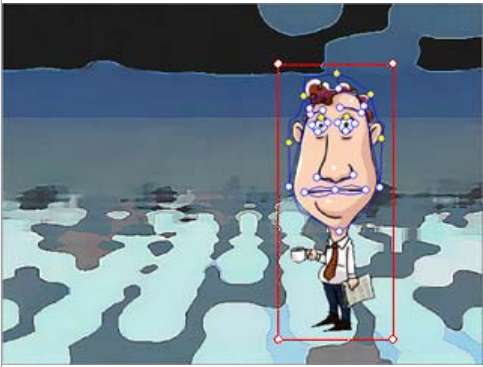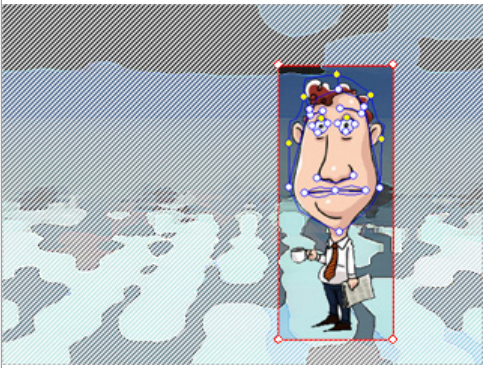	Character Frame
	Primary Mask (screen area) Defined
	Background Replaced with Image

Head Frame

It defines the head area of the model, includes the facial features, the nose, the mouth, or even objects such as hair or long ears that are attached to the head. Please refer to [Hair Mesh Layer](#) for more information.



▸ Basic Facial Mode and Detailed Facial Mode

You may click the **Basic Facial Mode**  or **Detailed Facial Mode**





button to view the wire frame and drag the control points or lines to fit a character's face much more precisely.



Hair Mesh Layer


The character in the photo may not always be oval-shaped due to hair styles, accessories like hats, or even the ears (of animals) for example.


CrazyTalk provides a **Hair Mesh Layer** so that you may separate the ranges of the skull and of the objects attached to the skull into different layers.

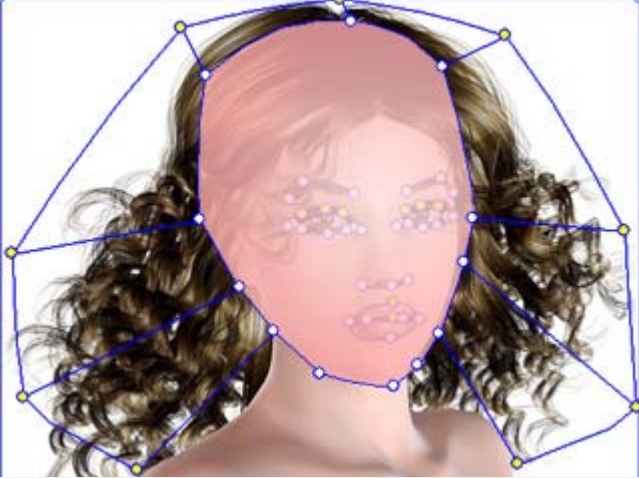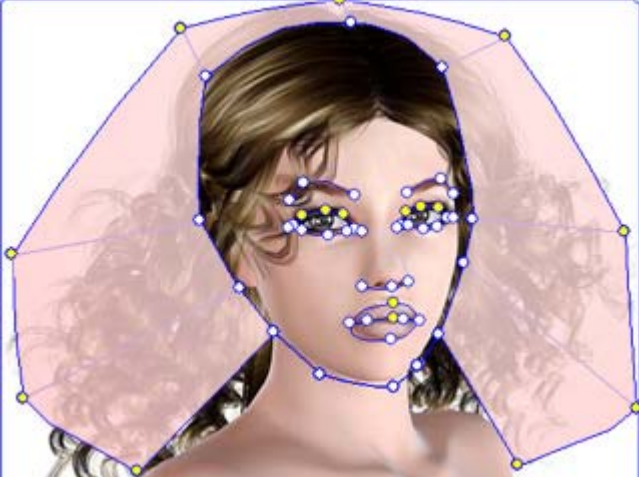	Character with fluffy hair
	Skull mesh
	Hair mesh

Characteristics and Benefits of the Hair Mesh Layer

- As the model's head is rotating, the skull mesh rotates and tilts tremendously while the hair mesh only moves mildly.
- The hair mesh layer protects the model from distortion and breaking as the model's mouth opens or the head rotates severely.

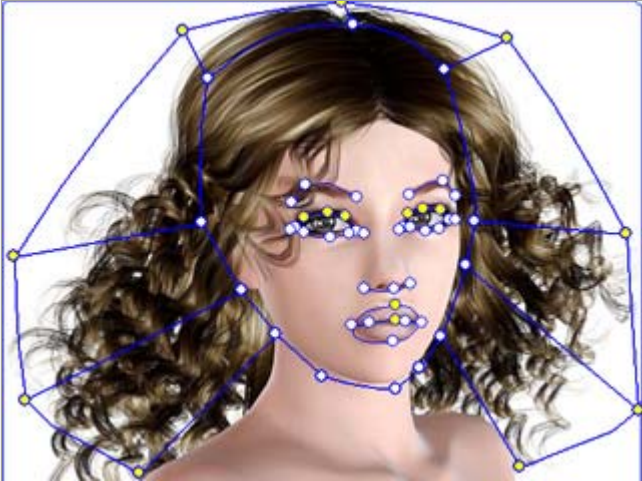CrazyTalk6	
	Character with hair mesh
	Smooth mouth shape
	Smooth head shape

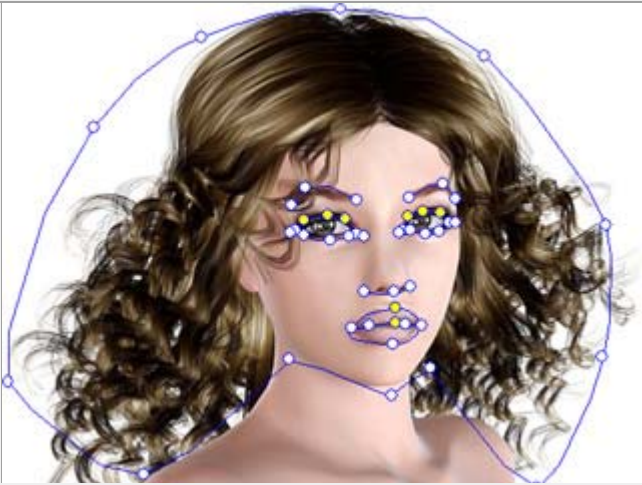
CrazyTalk5/Earlier Version	
	Character without hair mesh
	Mouth shape stretches or breaks
	Head shape distorts or breaks

Editing the Background Mask

The background mask area is the area in the image that does not get moved or animated during playback of the animation script. There are two methods to generate a background mask for your image.

► Using Background Mask Editing Panel

Click the **Background Mask Editing**  button to modify the background mask. The background mask, also known as the alpha channel, controls the transparency of TGA or PNG images.

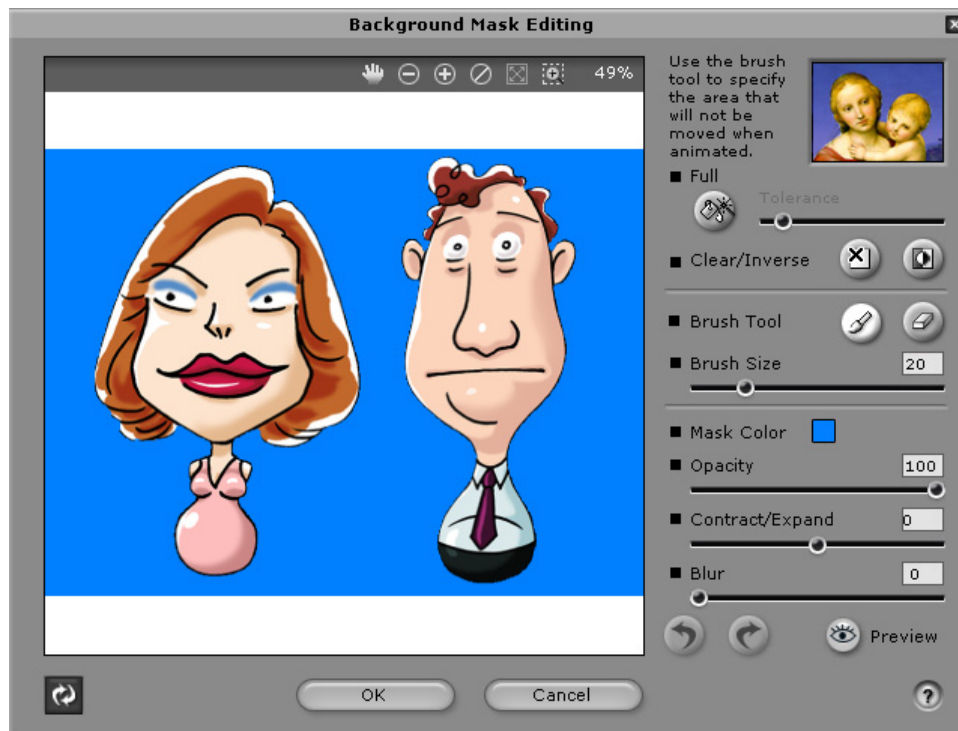


- Click the **Full**  button and click on the image to fill the area with the mask color. You can adjust the **Tolerance** slider to increase or decrease the background mask over the complete image area.
- Click the **Clear**  button to delete the background mask.
- Click the **Inverse**  button to invert the background mask area. The area that was previously defined as the background mask and the animated area are exchanged.
- Use the **Brush Tools** to specify whether you want to increase or decrease the background area. Click the **Paint**  button if you want to enlarge the background area or add more parts to it. Click the **Erase**  button to erase parts of the background mask.

- Adjust the **Brush Size** slider to increase or decrease the size of the brush tool. Use a thinner size when you want to change only small areas of the background mask. Alternatively, enter a number in the box next to the slider to specify the brush size.
- Click **Mask Color** to specify the color for the background mask using the color palette. The mask color does not actually show up on the model; it is for your reference only.
- Move the **Opacity** slider to specify the opacity of the background mask. The mask opacity does not actually show up on the model; it is for your reference only.
- Move the **Contract/Expand** slider to contract or expand the background mask.
- Move the **Blur** slider to blur the background mask.
- Click the **Preview** button to view the results of your editing.

► Loading an Image with Predefined Alpha Channel


If you want to perfect the mask, you can save your desired image with pre-defined alpha channel by means of an external image editor and then load the image into **CrazyTalk**. The alpha channel information will be automatically applied as the background mask in the **Background Mask Editing** panel.

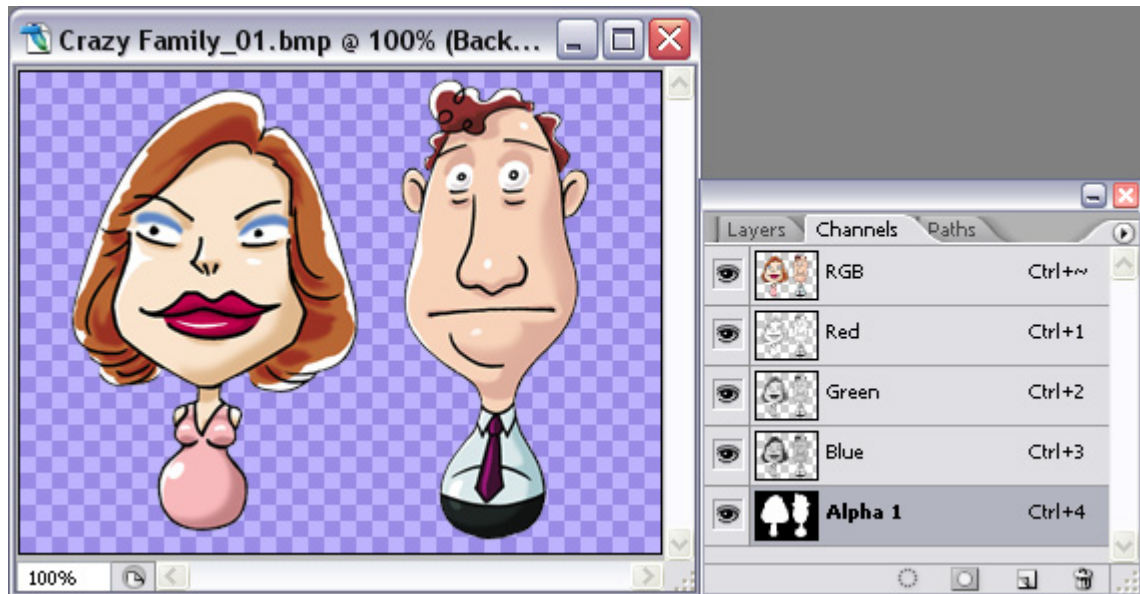

Adding and editing alpha channel in image editor (e.g. Photoshop)

Note:

- The image with alpha channel information can be in 32-bit BMP, TGA or PNG format.
- If you want to save the source image as PNG file, please remove the background layer, erase any unnecessary area of the image and save. You do not need to create an alpha channel layer in the **Channels** panel.

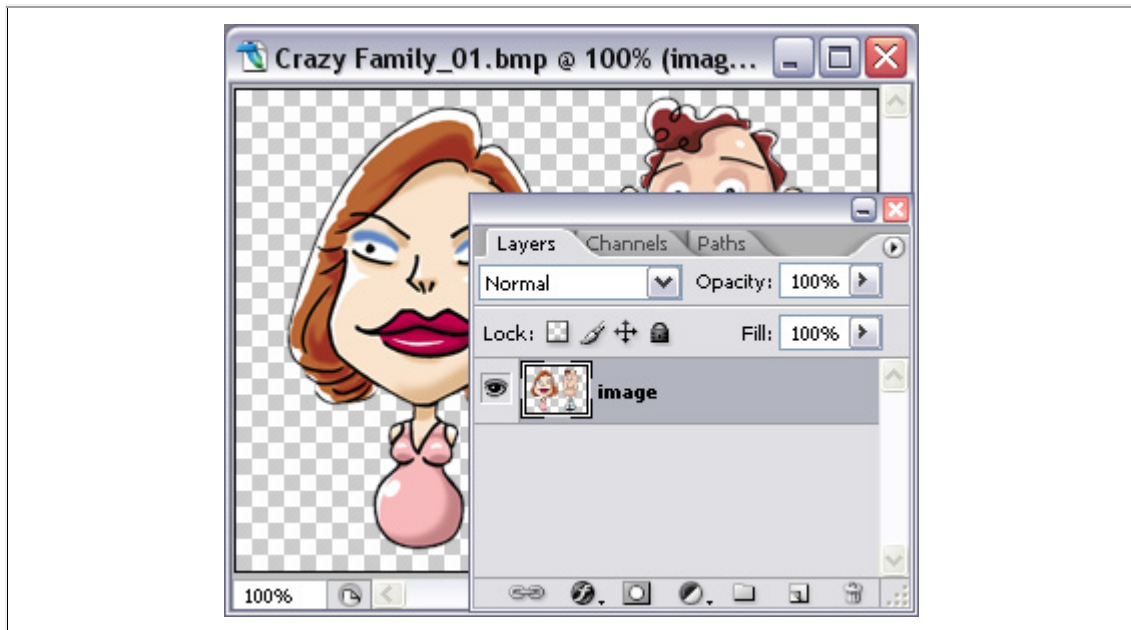


Configuring the Background Settings

You can add your own background image or a background with the color of your choice using the Background Mask Settings. Click **Background Settings**



to specify the background color or image.

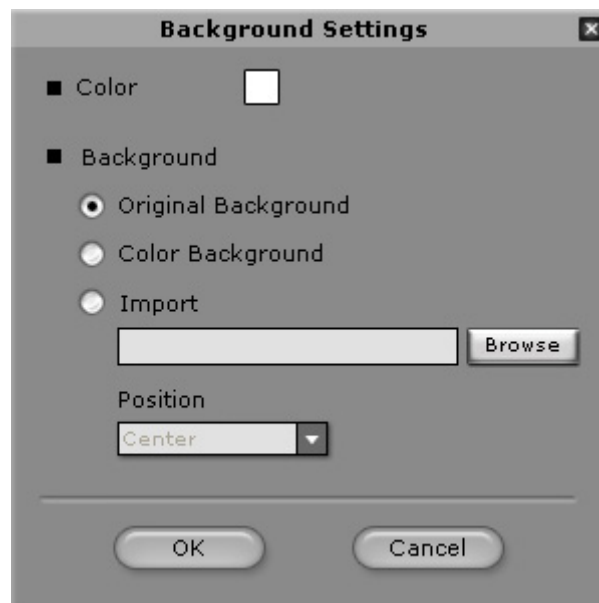

- Click **Color** to specify a color background. Select a color from the color palette displayed.
- Check **Original Background** if you want to leave the background unchanged.
- Check **Color Background** to use the specified color as the background color.

- Check **Import** to choose your own background image. Click **Browse** to specify the name and location of the image.
- Specify how you want the image to be placed using the **Position** drop-down box.



The original look



Define the background area



Image imported as the background




The result

Defining Background Mask for Entire Character


The wire frame of each model is divided into two parts, the **Character Frame** and the **Head Frame**.

Character Frame

- The **Character Frame** (quadrilateral wire) defines the primary mask of the whole project.
- As soon as the [background](#) is set to a solid color or image, the part of the project covered by the primary mask is replaced with the color or image.

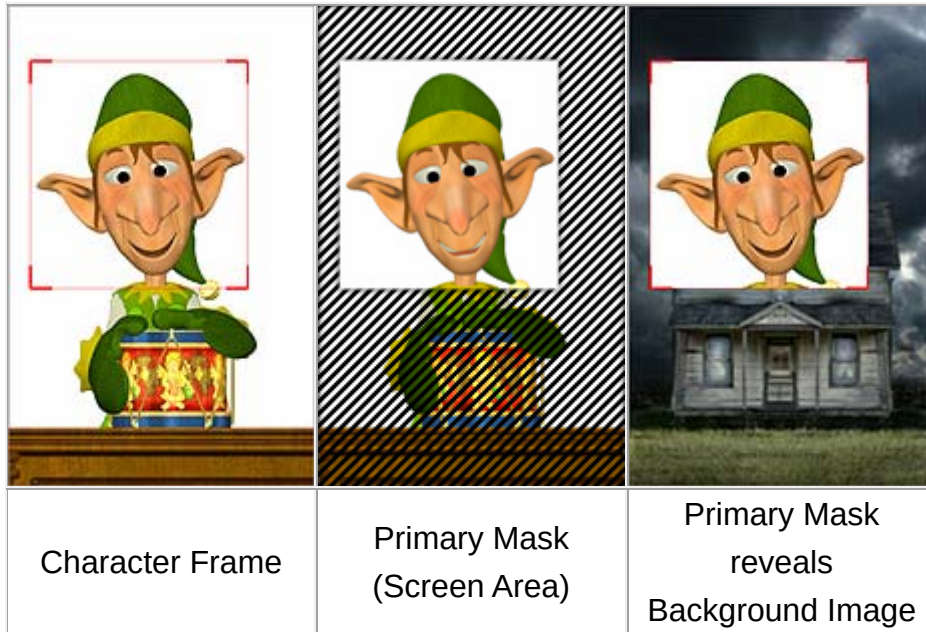

- You may modify the four corner points in the [wire frame mode](#) to define the primary mask area.

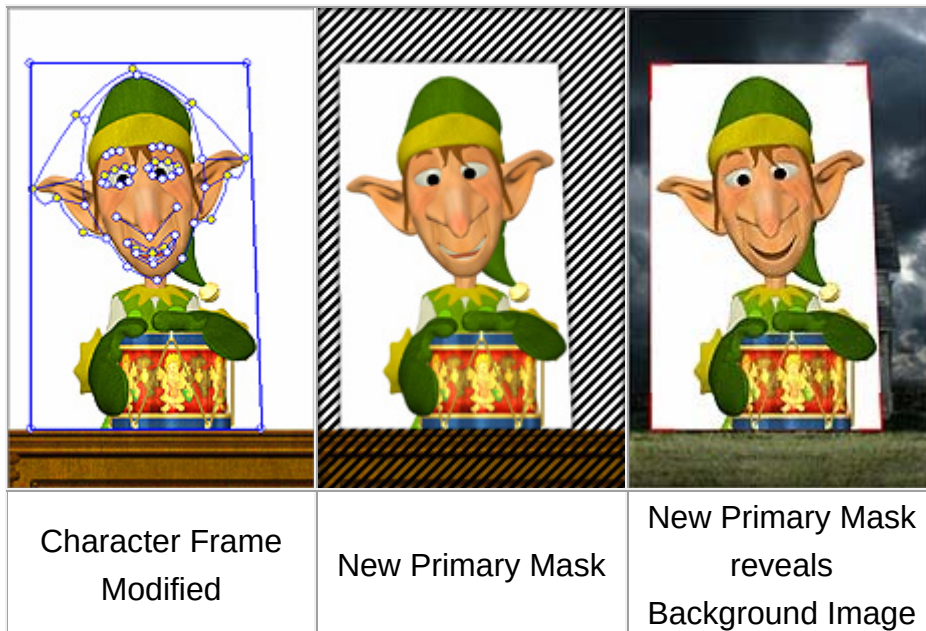

Fine-Tuning Background Area with Background Mask

Since the primary mask defined by the **Character Frame** can only be quadrilateral, you may use the **Background Mask Editing**  feature to fine tune the area that will reveal the specified background image. Please refer to [Editing the Background Mask](#) and [Configuring the Background Settings](#) for more information.

		
Part of Background Image Revealed by Primary Mask	Fine Tune the Mask in Background Mask Editing Panel	Result

Introducing the Fitting Tools

The [auto-fitting](#) of the four anchor points for the eyes and the mouth are used to create an approximate wire frame that fits the face. The fitting tools provide more control over the frame components and allow you to position them with more precision.

Click the **Basic Facial Mode**  or **Detailed Facial Mode**  button to fine tune the fitting process. The basic model provides 23 points on the wire frame and the detailed model provides additional points on top of those to adjust the wire frame. Move the individual points and resize the wires to ensure that the wire frame fits the image to the highest degree possible. Note that you can move the points in all directions. Experiment with the frame fitting with various images to get more practice and see what kind of frame produces the most realistic talking image.

Use the wire frame tools on top of the preview window as follows:

- Click the **Change Wireframe Color**  button cycle through different wire frame colors. This can be used if both the original image and the wire frame color are dark which makes it more difficult to correctly fit the wireframe.
- Click the **Select**  button to pick and move components of the wire frame. This is selected by default. You can move the wires that connect the frame points or the individual wire frame points by using the mouse to select the component. The mouse cursor changes its appearance when you move over the wire or the wire frame points. You can also move the frame points along the wires to get a wire shape more suited to the face contours. To move multiple points simultaneously, hold the **Ctrl** key and click the desired control points. The selected control points will turn red. Release the **Ctrl** key and then move the points to the desired location.
- Click the **Rotate**  button to rotate the wire frame or the frame component (wire). To use this tool, first select a frame component or a wire using the **Select**  tool. The selected wire will turn red. Next, click the Rotate button. Hold and rotate the mouse over the image in clockwise or counterclockwise direction to rotate the selected frame.

- Click the **Scale**  button to adjust the size of the wire frame. To use this tool, first select a frame component or a wire using the **Select**  tool. The selected wire will turn red. Next, click the Scale button. Now position the cursor over the image and drag up or down to increase or decrease the size of the wire.

- Click the **Close Mouth Points**  button to close the mouth points of the wire frame. This will cause the points for the upper and lower lip to move together as a single line. If your model has a closed mouth we suggest you use this option. This option is available only when you select the **Detailed Facial Mode**.

- Use the **Zoom In** , **Zoom Out** , **Hand** , **Fit to Window** , **Original Size** , and **Drag and Zoom**  tools to enlarge the image and achieve a more precise fitting for all the anchor points. To use the drag and zoom tool, drag a marquee across the image to enlarge

that part of the image. Press the **Full Screen View**  button or the **F11** key for a full screen view. Press the Esc key to exit full screen view.

- Check your fitting results periodically by clicking the **Preview Mode**



button while adjusting the wire frame

- Click the **Calibration**  button to play back a short script intended for calibration purposes. Click the down arrow next to it if you wish to select a specific part of the face to be tested. Use the playback control

buttons (, , ) at the bottom of the preview window to control playback of the sample script. The sample script consists of different expressions, gestures and voice types to allow you to see if the talking image is fitted properly.


Specifying Idle Settings

When a conversation happens in **CrazyTalk**, you may have the mute model sway or breathe rather than being all stiff and still. Every model can have its individual idle motions, which can make your story more life-like.

1. Select the model you wish to assign idle motions to in the **Model** page.



2. Click the **Model Motion Settings** button. The **Model Motion Settings** panel displays.

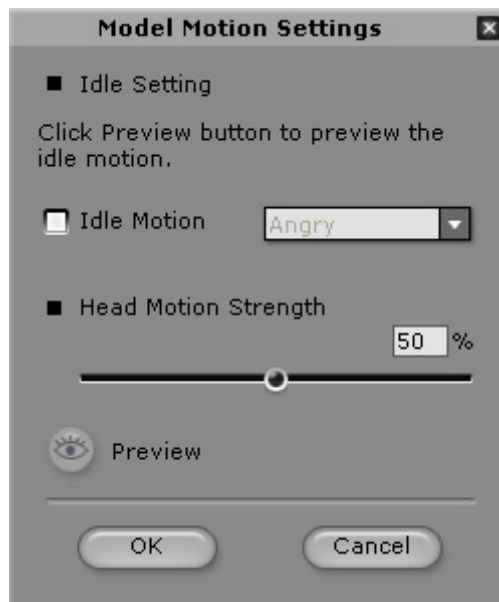

- Check the **Idle Motion** checkbox and select the desired motion from the drop-down list. The motion is used when the model is silent or in standby mode.
- Adjust the **Head Motion Strength** slider to adjust the intensity of head movements.
- Click the **Preview** button to preview the head motion. If the motion is not as desired, you can adjust the **Head Motion Strength** slider or tune the facial feature points again.

Advanced Facial Settings


After selecting an image as the model, you may adjust the facial features such as the eyes, teeth, mouth, and lips.

► VividEye Technology

CrazyTalk introduces the **VividEye Technology** in a layer-based concept. The 4 Layers (Eyelash, Eye Shadow, Optics, Eyeball) of **VividEye** Settings greatly increase the realism of virtual eyes while **EyeMagic** (Eyelash and Eye Shadow) adds cosmetic effects with various adjustable colors, lash sizes and style controls.

VividEye Technology

The four layers define the looks of eyelash, eye shadow, optics and eyeball:

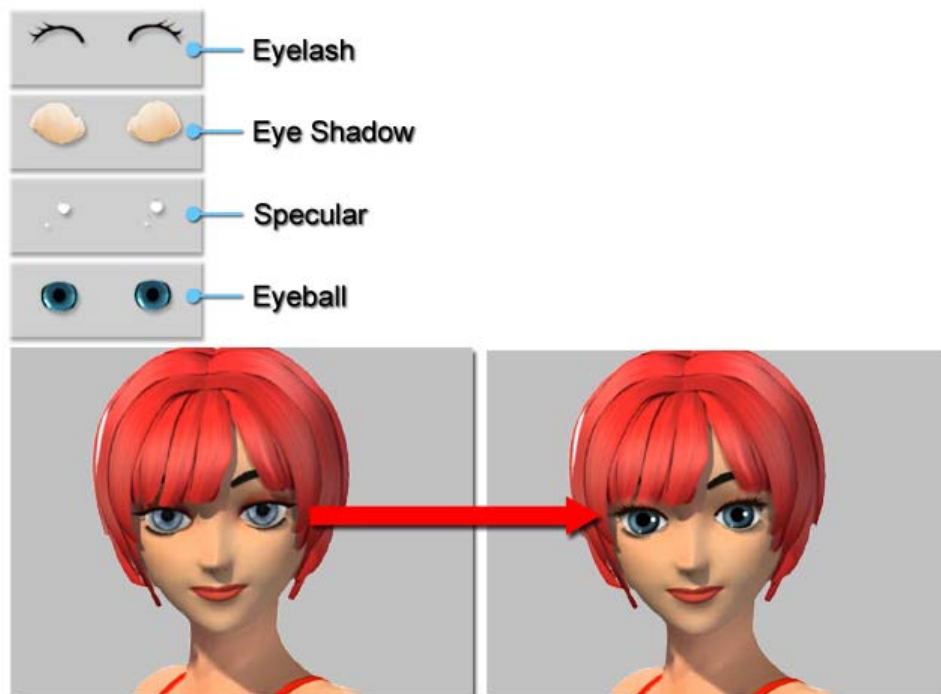

► Eye Template Gallery

CrazyTalk provides a virtual eye template gallery to match the design style of the **VividEye** templates.

Apply Virtual Eyes



1. Select a model for applying virtual eyes. Click the **Eye Settings**  button.
2. Choose a desired eye category from the **Eye Style** drop-down list, the gallery updates accordingly.
3. Select a desired eye template from the gallery to apply to the current model.
4. If you are satisfied with the result, click **OK**. If you wish to adjust the advanced eye settings, select the **Modify** radio button.

Note:

- **Apply Eye:** Check this box if you wish to apply virtual eyes settings from the **Modify** page.
- **Eye Motion Preview:** Toggle this button any time and move your mouse to preview the eye motion.

Cartoon Character

Eye Settings

Template

Modify

Custom

■ Eye Style 1.Cartoon

Cartoon_01

Cartoon_02

Cartoon_03

Cartoon_04

Cartoon_05

Cartoon_06

Cartoon_07

Cartoon_08

Cartoon_09

Apply Eyes

Eye Motion Preview

OK

Cancel

Original Eyes	Virtual Eyes Applied
	
	

Anime Character

Eye Settings

Template

Modify

Custom

■ Eye Style 2.Anime

Anime_01

Anime_02

Anime_03

Anime_04

Anime_05

Anime_06

Anime_07

Anime_08

Anime_09

Anime_10

Anime_11

Anime_12

Apply Eyes

Eye Motion Preview

OK

Cancel

Original Eyes	Virtual Eyes Applied
	
	

Animal

Eye Settings

Template

Modify

Custom

■ Eye Style 3.Animal

Cat

Dog

Lion

Lizard

Monkey

Owl

Snake

Toad

Treefrog

Walrus

Apply Eyes

Eye Motion Preview

OK

Cancel

Original Eyes	Virtual Eyes Applied
	
	

Comic Character

Eye Settings

Template

Modify

Custom

■ Eye Style 4.Comic

Comic_01

Comic_02

Comic_03

Comic_04

Comic_05

Comic_06



Comic_07

Apply Eyes

Eye Motion Preview

OK

Cancel

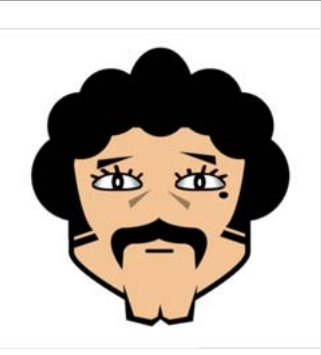Original Eyes	Virtual Eyes Applied
	
	

Human

This gallery contains natural eye templates for male, female, and female color cosmetics.


Eye Settings

☒ Template ☐ Modify ☐ Custom


■ Eye Style 5.Human ?



Female_01 Female_02 Female_03 Female_04



Male_01 Male_02 Male_03 W_Cosmetic...




W_Cosmetic... W_Cosmetic... W_Cosmetic... W_Cosmetic...

☒ Apply Eyes  Eye Motion Preview

OK

Cancel

Original Eyes	Virtual Eyes Applied
	
	

► Eye Settings - Eyeball


You can replace the original eyes of your model with virtual eyes for a more exotic effect. With a virtual **Eyeball**, the model can look around the environment as he/she speaks. You may adjust the size of the irises to endow the model with different characteristics such as romantic, profound depth, evil or dullness. **CrazyTalk** contains a gallery with various eye templates with different irises styles which are suitable for animals, humans, 2D comic or 3D

animation characters. Click the **Eye Settings**  button in the **Model** page to add virtual eyes.

Modifying Eyeballs

After [applying an eye template](#), you may wish to fine tune the appearance of the eyeballs.

1. Select the **Modify** radio button.
2. Choose the **Eyeball** tab.

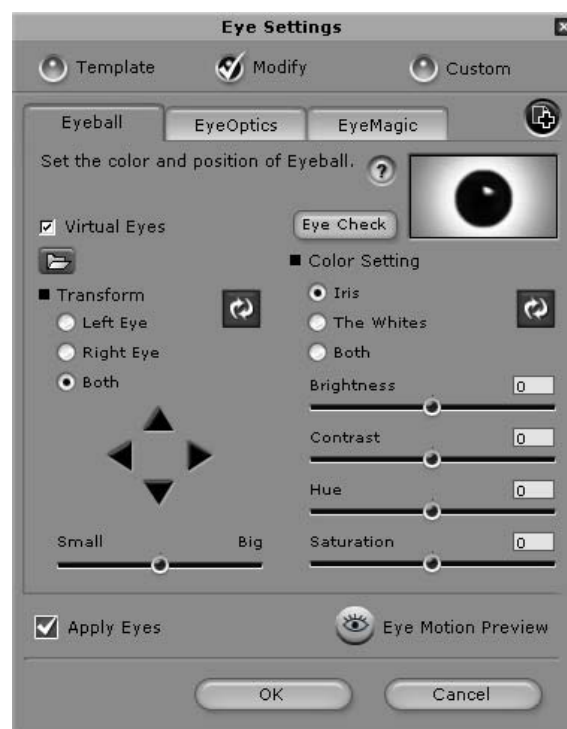

- Uncheck the **Virtual Eyes** box if you want to retain the original eyes in the image but wish to use the **EyeMagic** effects.



Virtual Eyes OFF

Virtual Eyes ON

- Click and keep the **Eye Check** button pressed to compare the original eyes with the virtual eyes. Use it as a guide to fine tune the eyes for natural results.
- To set the position of the eyeballs, use the **Transform** feature. Click the ▲/ ▼/ ◀/ ▶ arrows to move the eyeballs after selecting the **Left Eye**, **Right Eye** or **Both** option. Click the **Reset** button to clear your displacement settings and start adjusting again.
- Use the **Size** slider to adjust the size of the eyeballs.



Big Eyeballs

Small Eyeballs

- Use the **Color Setting** feature to adjust the color of the eyes. Select the **Iris**, **The Whites**, or **Both** option to select which part of the eye you want to modify. Use the **Brightness**, **Contrast**, **Hue** and **Saturation** sliders to adjust the eye color. Alternatively, enter a number in the boxes next to the sliders to change a parameter. Changes you make can be seen immediately in the image window. Accurately match the darkness of the virtual eyes with the darkness of the original eyes. Click the **Reset** button to clear your color settings and start adjusting again.



Iris Color Modified

The White Modified

► Creating Custom Eyeballs

You may create your character's eyeballs by importing a custom eyeball image:



Before Importing Custom Eyeball Image

1. Click the **Import**  button.
2. Locate the texture image for the virtual eyes. (jpg, bmp, tga, png are supported, 256 pixels x 256 pixels recommended)



Note:

- It is **not recommended** to import an image with any alpha channel information since the alpha channel will be transparent and you will see the background image through it.

3. Click the **Open** button to apply the selected image file.



After Importing Custom Eyeball Image


► Eye Settings - EyeOptics

The **EyeOptics** simulate the specularity and shadow effects on the eyeballs, which implies the spirit of the eyeballs. You may then generate brilliant eyes by increasing the specularity to add clarity to the eyeballs or add pale and dull effects to the eyes. This feature facilitates you with creating sparkling, crystalline, or turbid eyeballs.

You must [apply an eye template](#) from the eye gallery first.

Applying Eye Optics

1. Select the **Modify** radio button and click the **EyeOptics** tab.

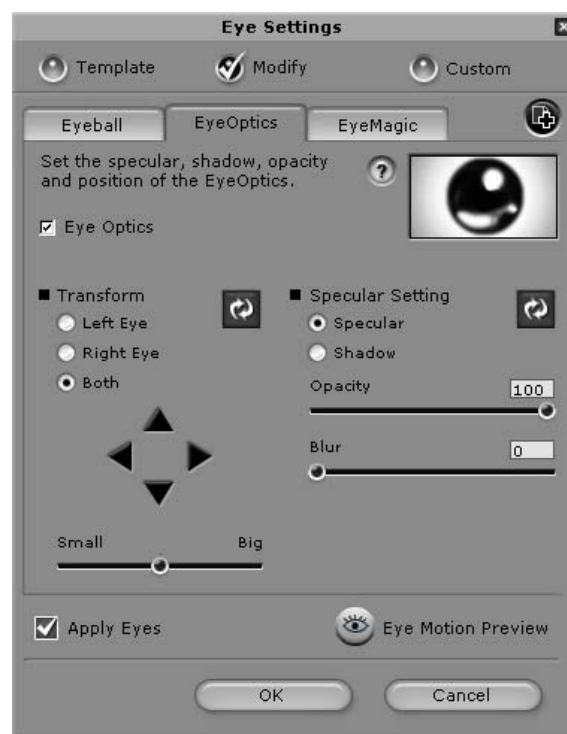

- **Transform:** Use the controls to set the position or size of the specular spot on the eyeball. It implies the direction of the lighting source.


	
Default Position/Size of the Specular	Scaled Up
	

Position Adjusted	
-------------------	--


- **Specular Setting:** You may decide the strength of the **Specular** and **Shadow** effects on the eyeballs.
- Please note that the **Shadow** effect simulates the shadow that is cast onto the eyeballs by the eyelids, which makes the eyeballs more sphere-like. Therefore, it can not be resized or re-located.



2. Check the **Eye Optics** box to apply the effect to the eyeballs.

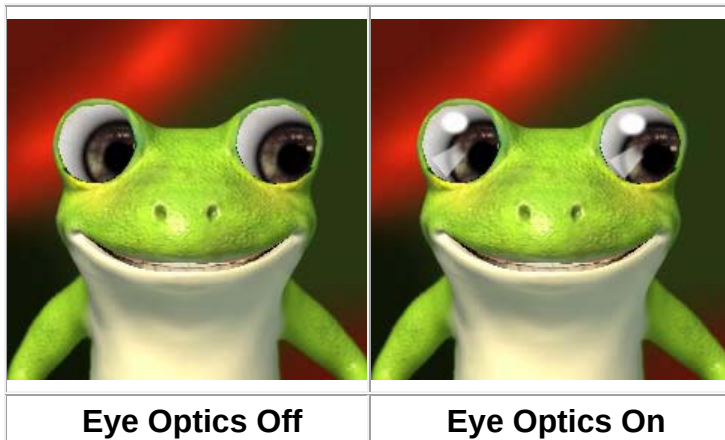

- **Transform:** You may use the transform tools to adjust the position or the size of the **Specularity**.
- **Specular Setting:** The **Specular Setting** specifies the clarity of the eyes. Utilize the radio buttons and sliders to define the level of **Opacity** and **Blur** for the **Specular** or **Shadow** effects.

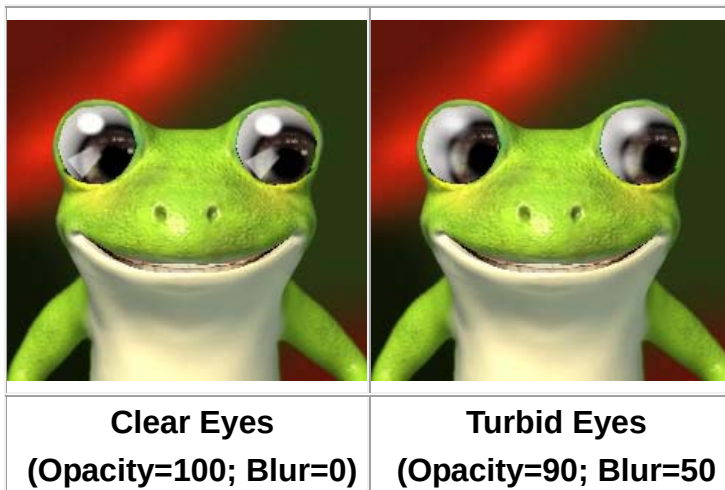

Note:



- The **Transform** data of the **Specular** effect can be adjusted individually

while the **Specular Setting** affects the **Specular/Shadow** for both eyes.

► Eye Settings - EyeMagic


CrazyTalk offers you **Eyelash** and **Eye Shadow** effects to generate more vivid appearance of eyes. You may apply the **Eyelash** effect to mimic mascara to enhance the eyelashes of the model. Increasing the volume of the lashes may allure more attention and create more dramatic expressions as the model speaks and blinks. With the **Eye Shadow** feature, you may generate various make-up styles such as the Smokey, golden shimmering or bruise eyes according to your scenarios. You can also use it to concealer or cover creases or defects on the models' eyelids. Furthermore, distortion or stretching issues as models close their eyes can be covered with **Eye Shadow** effects.

You must [apply an eye template](#) from the eye gallery and click the **Modify/EyeMagic** tab for further adjustment.

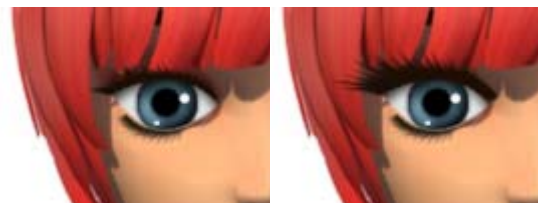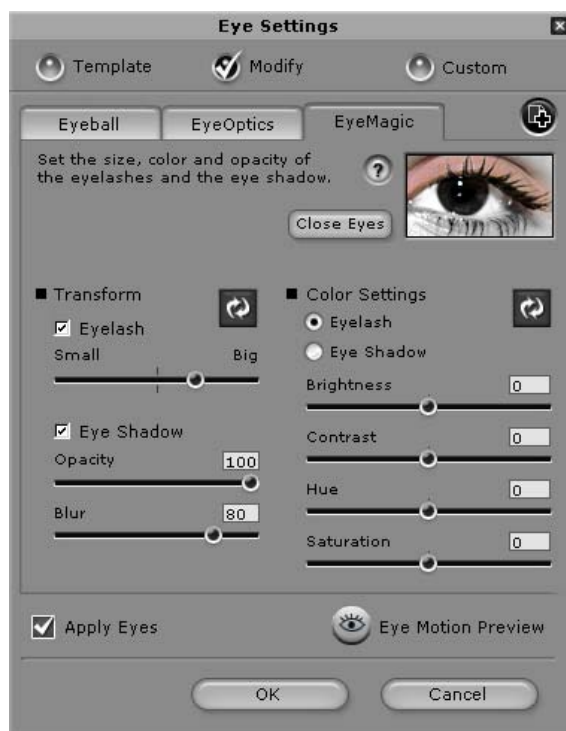


Small Eyelashes

Big Eyelashes

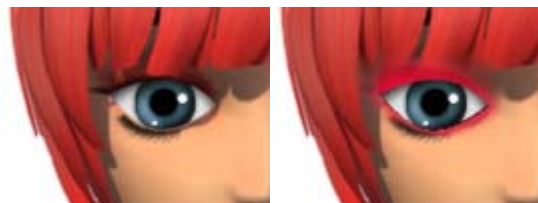

Eye Shadow:
Opacity = 10

Eye Shadow:
Opacity = 100

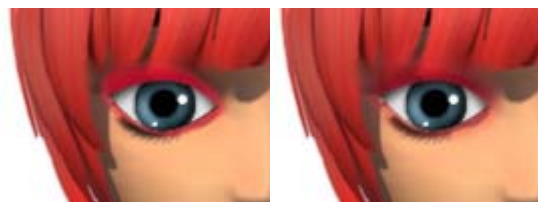

Eye Shadow:
Blur = 20




Eye Shadow:
Blur = 100

Note:

- Click and keep the **Close Eyes** button pressed to view the **Eyelash** and **Eye Shadow** effect with closed eyes.




Range of Eyelash

The range of the eyelash is defined by the upper eyelid wires. Please change to [Detailed Facial Mode](#) to see the wires.

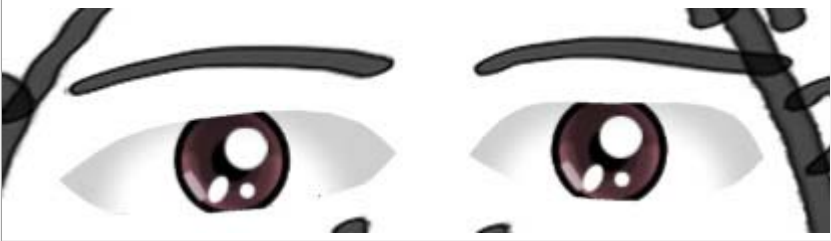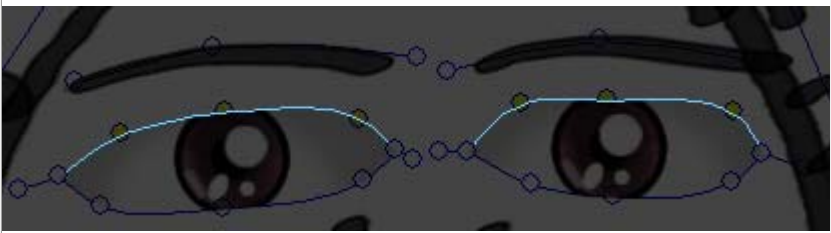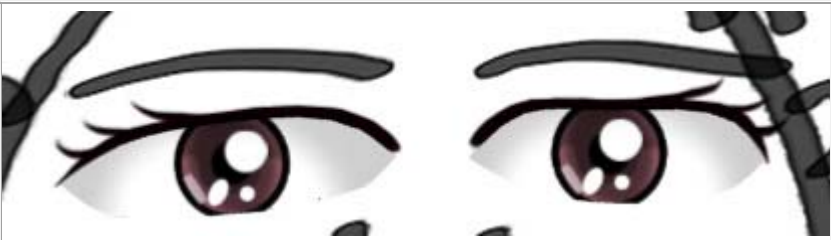	Without eyelash
	The eyelash wire (Detailed Facial Mode)
	With eyelash

Area of Eye Shadow

The area of the eye shadow is framed out by the eyebrows, upper eyelids and the end points of the eyes.

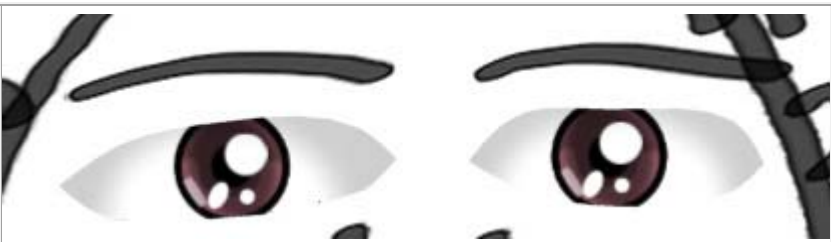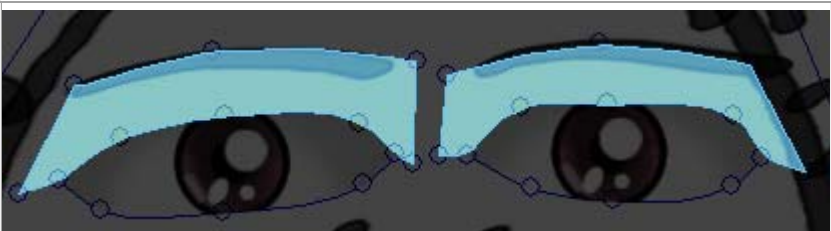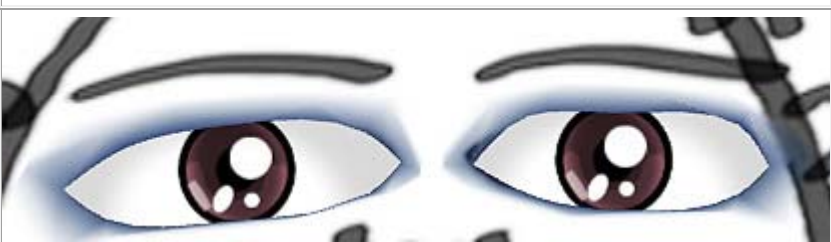	Without eye shadow
	The eye shadow area (Detailed Facial Mode)
	With eye shadow (Edge auto-blurred)

Benefits of EyeMagic - Creating Cosmetic Effects

- **Adding Eye Cosmetic and Eyelashes**


You may apply the **Eyelash** or **Eye Shadow** with/without the virtual eyes applied.



Original image



EyeMagic with Real Eyes

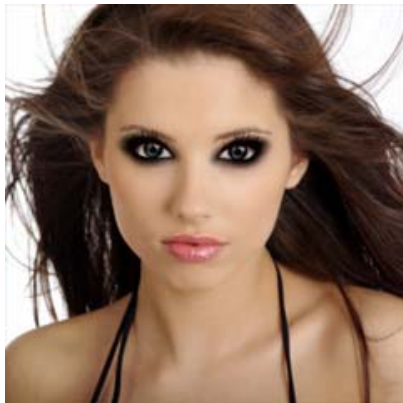

**EyeMagic with Virtual
Eyes**

- **Changing Eye Shapes**

You can use **Eye Shadow** to act as eyelids when you change the eye shapes. The following example turns big eyes into natural looking small eyes.

1. Use a model whose wire frame is already properly fitted.



Original image

Eye wires well fitted


2. Change the eye's wires to change the shapes of the eyes. You may see the new eyelids are mapped over the original image.



Change eye shapes

Result

3. Apply the **Eye Shadow** effect to conceal the original image.

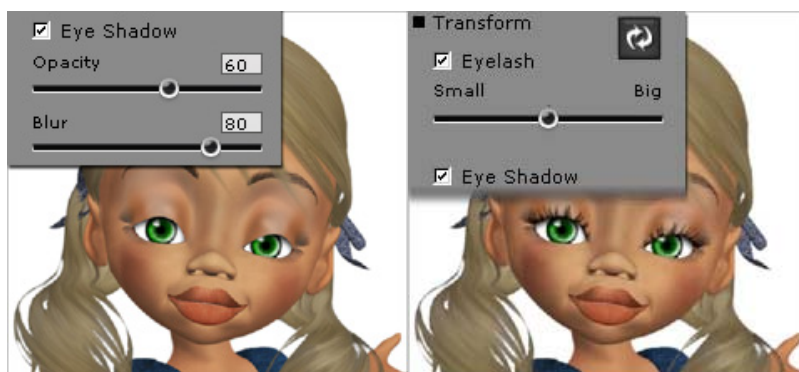

Eye shadow applied

Eyelash applied

Benefits of EyeMagic - Concealing Image Stretching Issue on Eyelids

When the model's eyes close, you may sometime see an image stretching issue. With the **Eye Shadow** effect, you can cover the stretching image with solid color.

1. The eyelid image stretches as the model blinks without eye shadow.



2. Apply eye shadow effect to conceal the stretching image.



► Saving Custom Eye Template


After creating custom eyeballs and all the eye-related settings, you may wish to save it as a custom template for future use. **CrazyTalk** allows you to do just that.

Saving Custom Eye Template

1. Please set all the eye settings.




2. In the **Modify** page, click the **Add to Custom**  button.
3. The **Eye Settings** panel switches to the **Custom** page automatically. Your custom eye template is added into the gallery.

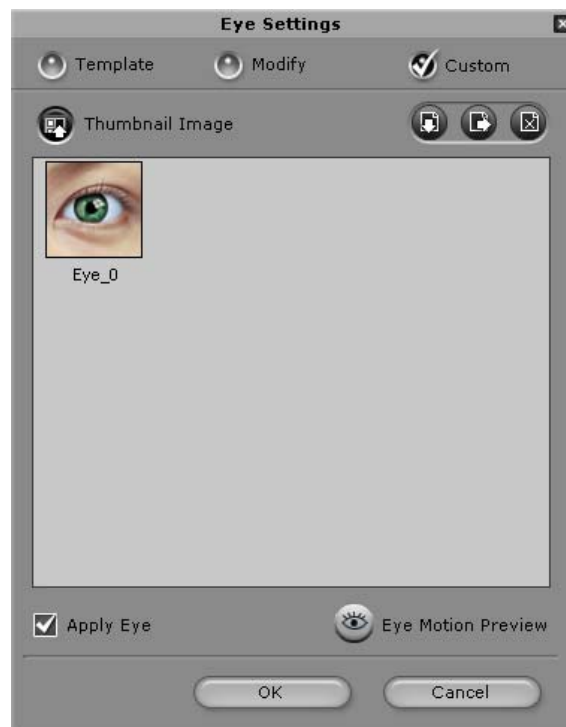

4. Click on the name of the template to rename it.

5. Click the **Thumbnail Image** button and load one image as the thumbnail of this template.

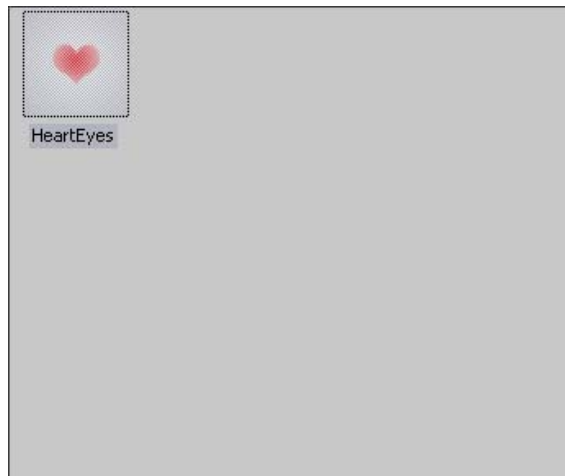


Note:

- The settings and status you adjust in **EyeBall**, **EyeOptics** and **EyeMagic** will be saved altogether.

► Teeth Settings

If the original image has no teeth displayed, you can add virtual teeth that are displayed when the mouth is opened. Click the **Teeth** tab in the **Mouth Settings** panel to add virtual teeth and adjust their settings.

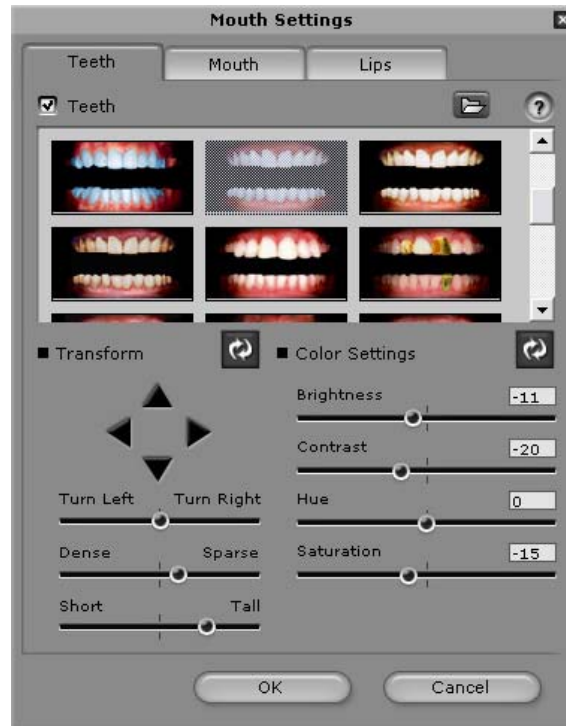

- Check the **Teeth** checkbox if you want to add teeth to the mouth.
- If you want to use any of the virtual teeth available from the teeth templates, select a set of teeth from the gallery. The new teeth are immediately displayed in the preview window.
- To set the size of the teeth, use the **Scale** feature. Move the **Dense/Sparse** slider to adjust the width of the teeth. Move the **Short/Tall** slider to adjust the height of the teeth.
- To specify the position of the teeth in the mouth, use the **Transform** feature. Click the ▲/▼/◀/▶ arrows to move the teeth. Click the **Resume** button to clear the displacement settings and start adjusting again.
- Use the **Turn Left/Turn Right** slider to rotate the teeth to match the angle of the mouth.
- Use the **Color Settings** feature to choose the color of the teeth. Move the **Brightness**, **Contrast**, **Hue**, and **Saturation** sliders to adjust the teeth color. Alternatively, enter a number in the boxes next to the slider bar to change the parameter value. Click the **Resume** button to clear the

color settings and start adjusting again.

- Click the **OK** button when done.

Note:

- You may also import your [custom teeth](#) image as the texture of the virtual teeth.

► Creating Custom Teeth

You may create your character's teeth by importing a custom teeth image:



Before Importing Custom Teeth Image

1. Click the **Import**  button.
2. Locate the texture image for the virtual teeth. (jpg, bmp, tga, png are supported. 256 pixels x 166 pixels recommended)



The teeth image, in PNG format, containing alpha channel

(The part displayed in check board pattern)

Note:

- If you import an image in 32-bit **BMP/TGA**, the black part in the image will be converted into the alpha channel.

3. Click the **Open** button to apply the selected image file.




After Importing Custom Teeth Image



The part with alpha channel will be transparent
to reveal the color inside of the mouth

► Mouth Settings


CrazyTalk lets you modify the inner mouth and throat color for animation scripts which require the mouth to be opened wide. Click the **Mouth** tab in the **Mouth Settings** panel to adjust the color levels of the inner mouth:

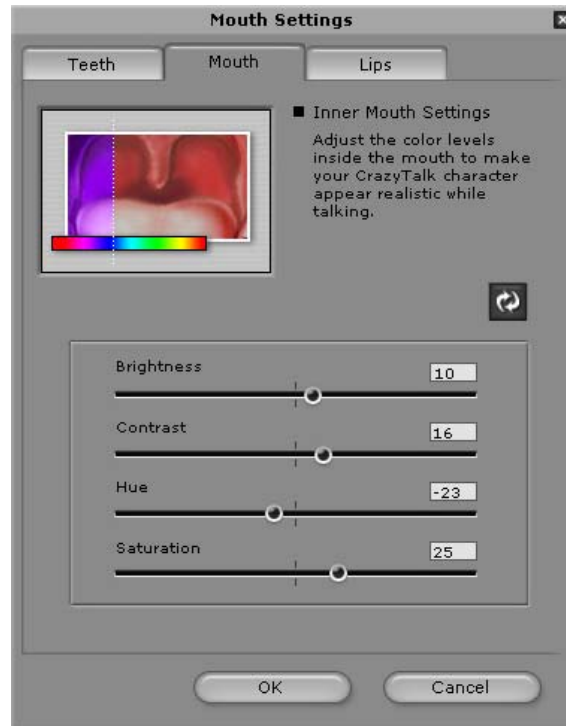

To adjust the texture and color levels of the inner mouth, move the **Brightness**, **Contrast**, **Hue**, and **Saturation** sliders until you achieve the desired throat color. Alternatively, enter a number directly in the boxes next to the sliders to change the parameter's value. Changes can be seen immediately in the image window. The mouth of your model will be wide open during this operation to allow you to better see the color change. Click the **Resume** button at any time to clear your changes and restart. Click the **OK** button when done.

► Lips Settings

CrazyTalk now offers lips setting to make the lip movements as realistic as possible. This setting lets you specify the position of the control points on the lips that are opened first. Click the **Lips** tab in the **Mouth Settings** panel to adjust the lips as follows:

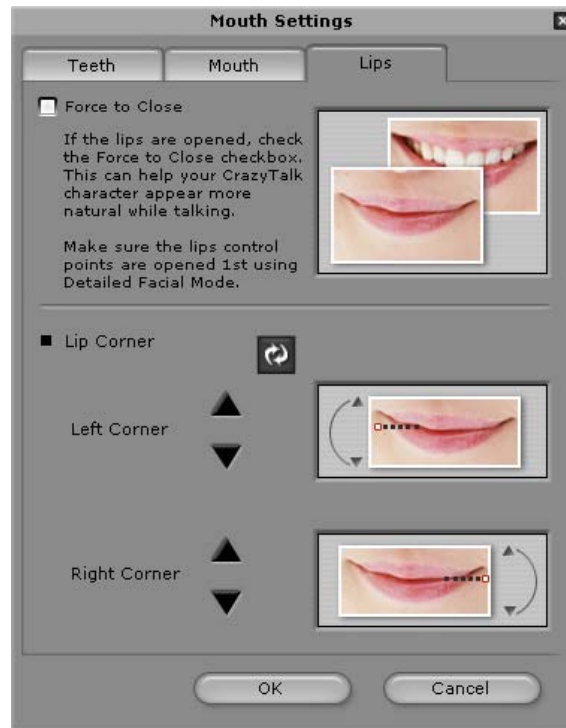

- Check the **Force to Close** checkbox to close the model's lips. This feature is useful when the original image has an open mouth. Make sure that the [control points for the open lips](#) are specified correctly while adjusting the wire frame.



- To set the position of the lips, click the ▲/▼ arrows next to **Left Corner** or **Right Corner**. Click the **Resume** button to clear your settings and start adjusting again.
- Click the **OK** button when done.

Saving Project Models

CrazyTalk lets you to save models under the **Custom** part of the image gallery. You can modify a template image or create a talking image from an imported image of your choice, use the fitting and image processing tools to prepare the image for animation, and then save the model image for future use.

To save an image, do one of the following:

- Click the **Add**  button to add the model to the custom model gallery. You can rename the image and save it to a desired folder using the tools at the top of the image gallery.
- After you are satisfied with the model and the color, size, and motion attributes, click the **Overwrite**  button in the image gallery to save all the changes to the selected model file.
- You can also save the model image as a **JPG** image by clicking the **Save**  button.


Note:

- If you **Add** or **Overwrite** (while holding the **Ctrl** key) and apply one model in the gallery repetitively, the quality of the model will decrease since **CrazyTalk** applies the model and its mask in **BMP** format but saves it in **JPG** format.


CREATING A CRAZYTALK STAGE

Introducing the Stage

After you create one or multiple models on the **Model** page, you may then switch to the **Script** page to generate the story. Once the **Script** page displays, you will encounter the **Stage** as shown below:

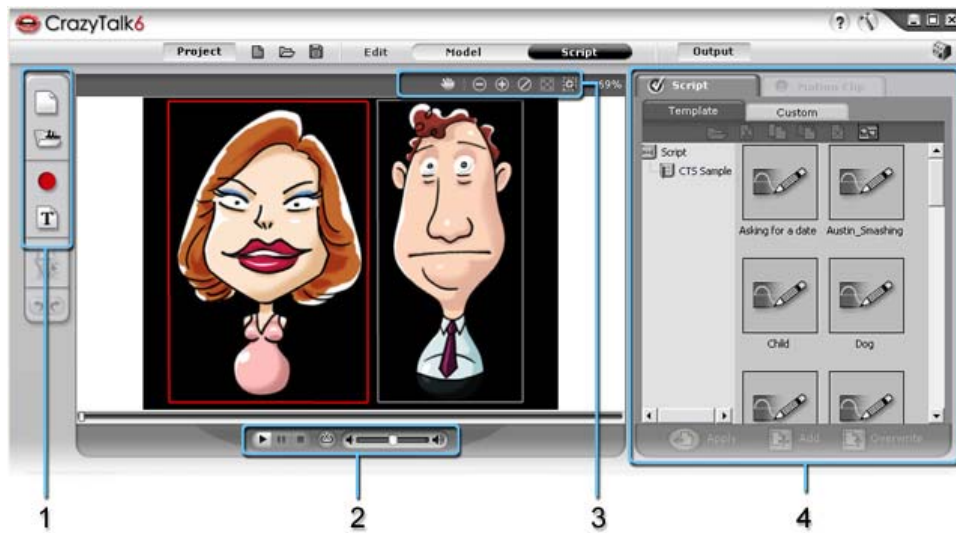

1. Add Voice Scripts	 : Create an empty script (15 seconds by default).  : Import prepared audio file as new voice script (.wav, .mp3).  : Record sound from microphone to create a voice script.  : Utilize TTS engine to convert text into voice script.
2. Playback Control	 : Playback the project.  : Pause playback.  : Stop playback.  : Loop the playback.  : Adjust volume.
3. Viewing Tools	 : Full Screen View - Display image in full screen view.  : Zoom In - Enlarge image to increase clarity.  : Zoom Out - Reduce magnification to increase the area of visibility.  : Hand - Pan across the image.  : Fit to Window - Resize image to fit it in viewing window.  : Original Size - Display image at original size and magnification.  : Drag Zoom - Drag a marquee across the image and enlarge the selected area.

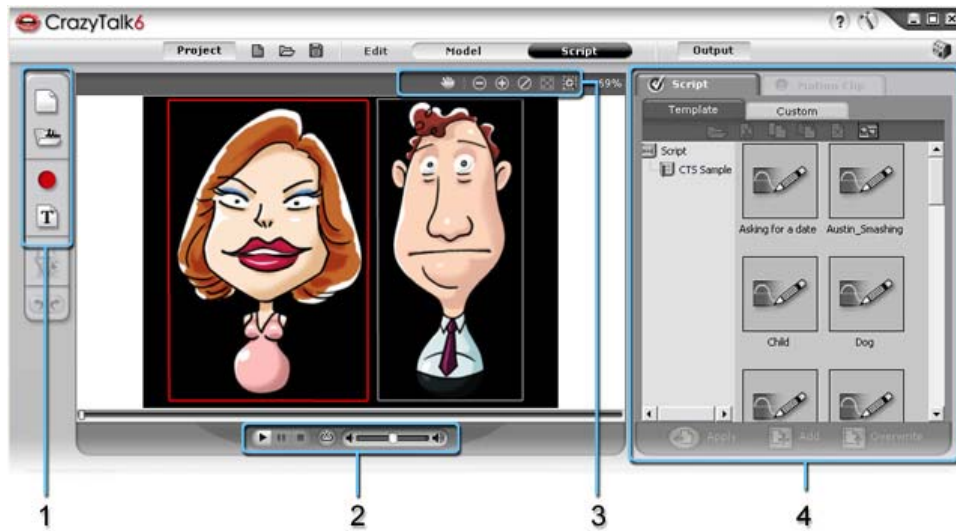

4. Script Gallery



: Create a new folder.



: Cut the script file.



: Copy the script file.



: Paste the script file.



: Delete the script file.



: Toggle between thumbnail and list mode.




: Apply script from the gallery.




: Add selected talking script to custom script gallery.



: Overwrite the selected gallery script file with the currently picked talking script.

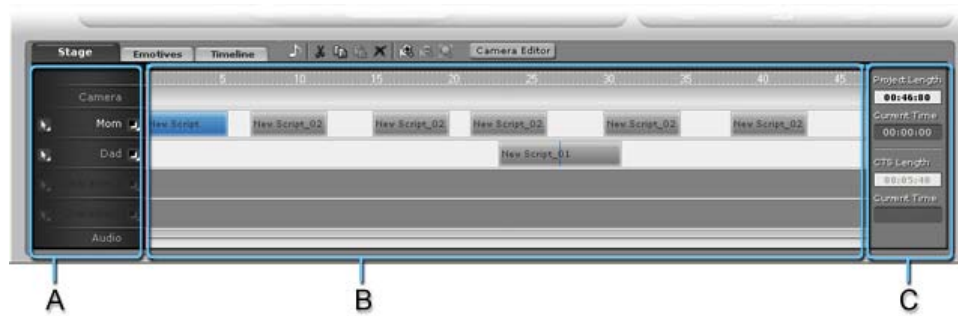

A. Object Name List	- This panel lists the name of the main camera, the name of the characters and the audio track. - You may change the characters' names, change the layers of each character or exchange characters' tracks.
B. Stage Tracks	Camera Track: In this track, you may add camera transform keys to generate camera operating effects. - Click the Camera Editor  button to add camera keys or use the Auto Zoom feature. Please refer to Utilizing Camera to Create Close Ups for more information. Model Track: In the model track, you may add voice talking scripts to models (16 talking scripts per character), perform basic editing to the talking script (cut, copy, paste, delete), rename the talking script, and loop the talking script. Audio Track: This track shows the wave graphic of the background music. You may drag to select a range and then cut, copy, paste or delete the music within this range. - Click the Background Audio  button to load an audio file as the background music. (.wav, .mp3)

C. Time Display	• Stage Mode Enabled ■ Project Length: Displays the total length of the project. You may change the project length by typing in a desired time length into the field. The maximum length of the time for a project is 30 minutes. ■ Project Current Time: Displays the time frame where the indicator is currently located. You may type into desired time to have the indicator jump to the time frame specified. • Timeline Mode Enabled ■ CTS Length: Displays the length of the selected talking script. You may change the talking script length by typing in a desired time length into the field. ■ Current Time: Displays the relative time frame where the indicator is located within the talking script. You may type into desired time to have the indicator jump to the time frame specified.
-------------------------------	---

► Basic Concepts of Stage and Scripts


Models and Stage

When you add one or more (up to four) models on the **Model** page, the same number of models will be enabled in the **Stage** panel on the **Script** page.


Model Page	Script Page/Stage Panel
	
Two models are added. (You may add up to four models)	The models enabled in the stage panel.

Talking Scripts for Models on Stage

You can then add up to 16 talking scripts for each model in different time frames. Please refer to [Inserting Talking Scripts to Models](#) for more information.

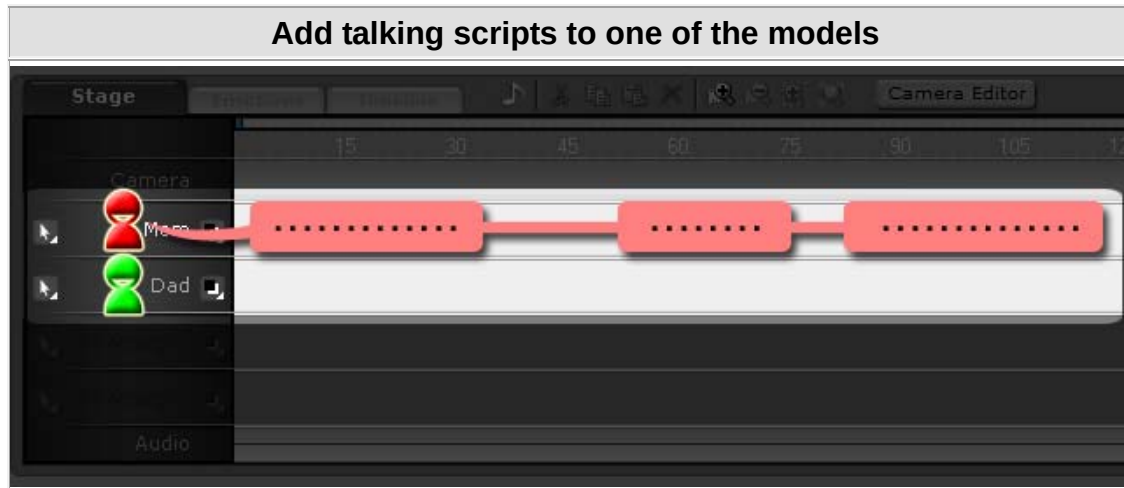

If you wish to generate a conversation, you may then add talking scripts to another model intermittently to another model's talking scripts.

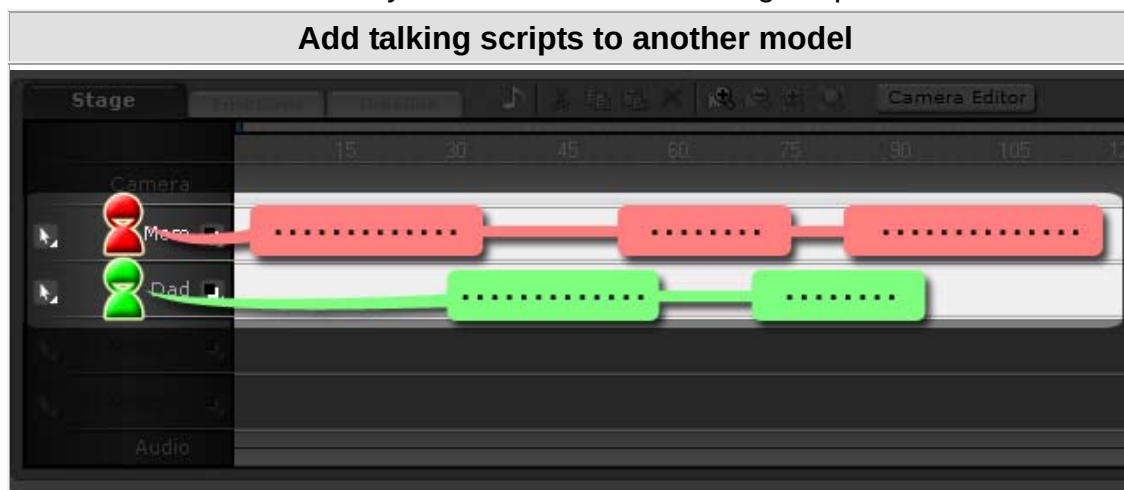


Editing Talking Scripts

The talking scripts can be [applied with emotions](#) or be edited individually via the **Emotives** and **Script Timeline** panels.

Select one of the talking scripts for the desired model to enable the tabs of these two panels.




In the **Timeline** panel, all the talking scripts from model tracks enabled are listed in the **Talking Scripts** drop down list. You may then change to another talking script to edit.

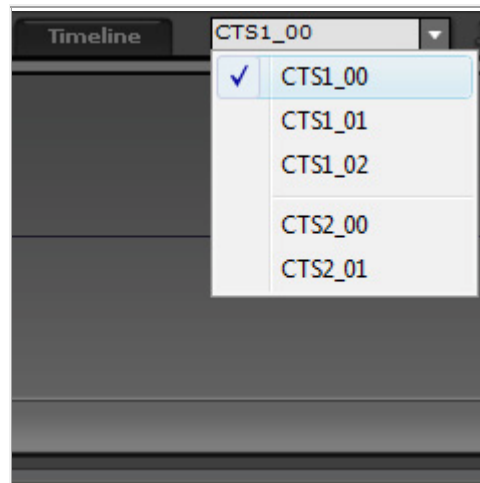

Please refer to [Editing the Script Timeline](#) for more information about editing the talking script.

► Inserting Talking Script to Models

In the **Stage** panel, you may utilize the left-side tool bar to insert talking scripts or right click on the target model's track to insert a talking script.

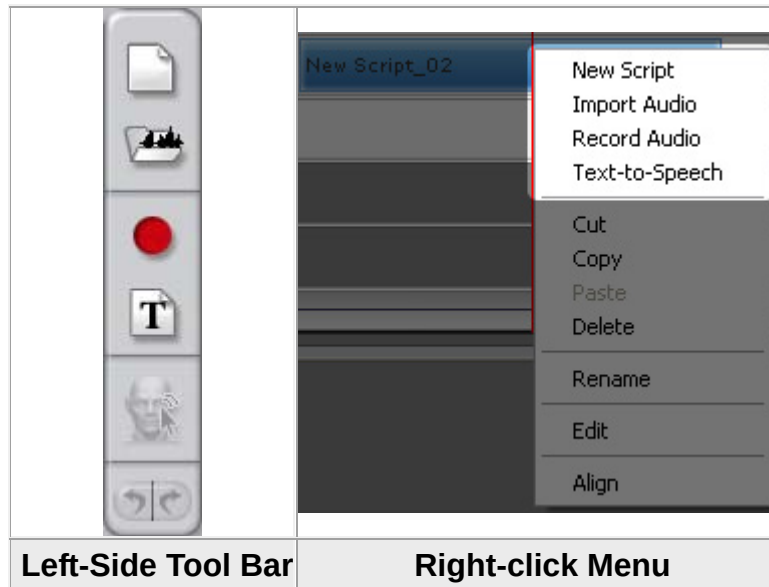

Looping Talking Script

When the talking script is inserted, [edit it with the Script Timeline](#) or **Loop** it.

To loop a talking script, move the cursor to the right edge of the talking script. When the cursor changes to a double arrow, click and drag it to the right to loop the clip.



► Inserting Talking Script: Using Talking Script (CTS)

When you wish to insert a talking script into the script track in the **Stage** panel, you may consider using the script (CTS files) in the **Template** or **Custom** gallery installed along with the program.


For Selected Model

Double-click on the talking script file in the gallery to insert it into the current time on the talking script track of the selected model.

Select a talking script file in the gallery and click the **Apply**  button to insert it into the current time on the talking script track of the selected model.

For All Enabled Models

Alternatively, you may drag the desired talking script from the gallery onto the stage and drop it on any point of time.

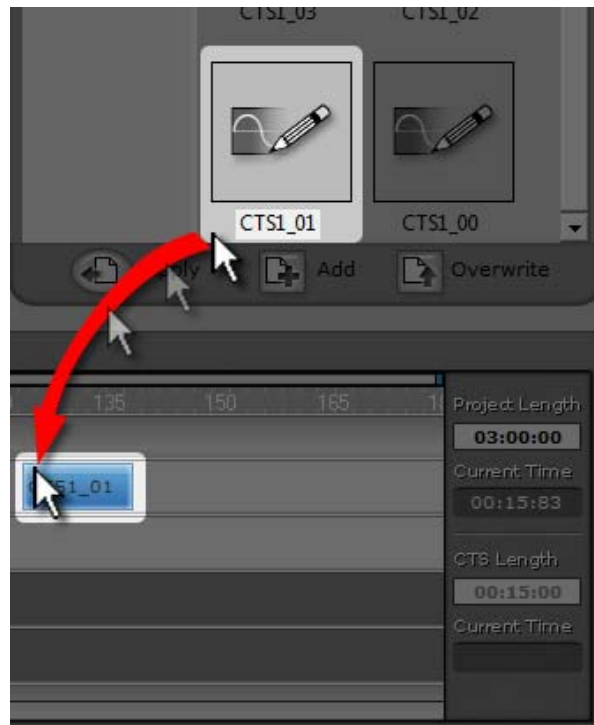

Note:

- If you utilize this method in the **Timeline** panel, the current talking script will be replaced by the new one.

► Inserting Talking Script: Using the Sound Recorder

CrazyTalk provides a sound recorder that can record audio from various audio sources. This audio can then be used as the talking message or the script for the models. The sound recorder can record sound from various audio devices such as a microphone, phone line, CD player, audio line in, or any other auxiliary input device connected to your PC.

To record sound, click the **Record Audio**  button. The sound recorder menu opens.



Follow these steps to create the audio script:

1. Select the source for recording sound from the **Input Device** drop-down list.
2. Adjust the recording volume using the **Volume** slider.
3. Click the **Record** button to start recording. Recording from the specified input device starts.
4. Click the **Stop** button to stop recording sound.
5. Click the **Play** button to play back the recording.
6. If you are satisfied with the recording, click the **OK** button. If not, press the **Record** button to record again.

Note:

- The maximum length of a recording is 30 minutes.
- If you utilize this method in the **Timeline** panel, the existing talking script will be replaced by the new one.

► Inserting Talking Script: Importing WAV / MP3 Files

CrazyTalk provides the useful feature of importing audio files and using them as the script for the model. For instance, if you want your model to sing a song, you can import your favorite song in WAV/MP3 format.

To import WAV/MP3 files, please follow the steps:

1. Click the **Import Audio**  button to import a speech file in PCM WAV/MP3 format.
2. Specify the name and location of the WAV/MP3 file using the dialog box.
3. Click the **Open** button to open the file. The file is imported and used as the script.

Note:

- The maximum length of an imported audio file is 30 minutes.
- If you hold the **Ctrl** key while importing a file, it will only replace the data of the current script file. If you just want to change the data instead of creating a new script, use this function to save time from re-editing scripts.
- If you utilize this method in the **Timeline** panel, the current talking script will be replaced by the new one.


► Inserting Talking Script: Converting Text to Speech

CrazyTalk can also convert text to speech using Microsoft's TTS (Text-to-Speech) engine. You can thus create your own script for the talking model.

CrazyTalk supports SAPI compliant Text-to-Speech engines. We currently use the Microsoft TTS engine as this has 19 voice characters available. If you currently only have the one voice installed (default), other voices are available directly from our site at <http://www.reallusion.com/mtts.asp> or Microsoft's [website](#).

To convert text to speech, open the TTS dialog box by clicking the

Text-to-Speech  button. The TTS dialog box opens.

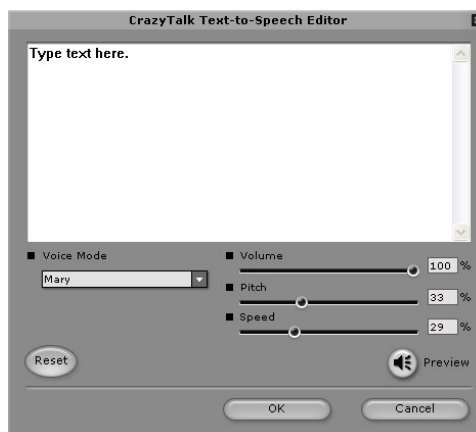

Follow the steps to create an audio script:

1. Type the text in the editor window. Alternatively, you can also copy and paste text from your favorite word processing program.
2. Select the type of voice to be used by the model using the **Voice Mode** drop-down list. Various voices of both sexes in different settings as well as a robotic voice are available.
3. Adjust the voice by using the **Volume**, **Pitch**, and **Speed** sliders to achieve the desired effect. You can also enter a number directly in the boxes next to the sliders. You may need to experiment a little with these settings before you get a satisfactory result. Click the **Reset** button at any time to reset the sliders to their default values.
4. Click the **Preview** button to play back the text.
5. Click the **OK** button when done.

Note:

- If you utilize this method in the **Timeline** panel, the current talking script

will be replaced by the new one.

► The Layers of Models on the Stage

Since **CrazyTalk** supports multiple talking heads, the **Layer** concept is applied to solve the issue when two or more model heads overlap as they are moving. This layer idea includes all the effects that belong to the model as well.

Basically, the model located at a higher position in the **Stage** panel possesses a higher level of layer.

Model Page	Layer Status in Stage Panel
	
Two models are added. (The female model is added before the male model)	The female model has a higher level than the male model.
Model Transformed	Model with Special Effects
	
The model in the higher level layer covers the one in the lower.	The SFX, as an entity with the model, covers the one in the layer with lower level.

► Changing Layer Order of Models

If you wish to change the layer order of the models in the **Stage** panel, it would be tedious to go back to the **Model** page, delete the model at the higher layer and add it back to relocate it to a lower layer. **CrazyTalk** provides you a feature to re-arrange the layer order in a simple way.


1. Given are two models whose layer orders are described as follows:

Model Page	Layer Status in Stage Panel
	
Two models are added. (The female model is added before the male model)	The female model has the higher level than the male model.

2. When the models move and overlap with each other, the result is as follows:

Model Transformed	Model with Special Effects
	

3. Click the  button besides the name of the female model and select **Down** in the pop-up menu to move the model down one level with all the talking scripts.

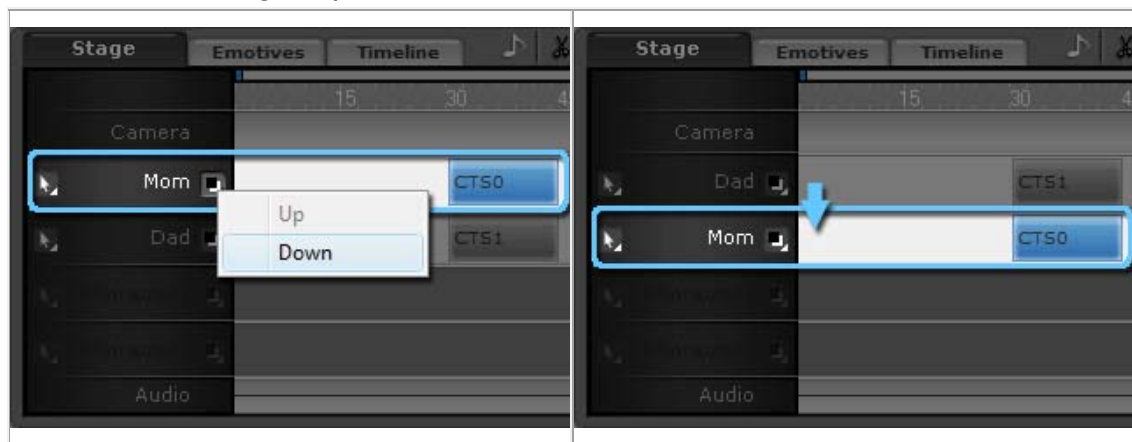

4. The female model with effects will be covered by the male model as a result.



► Exchanging Talking Scripts

► between Models in Stage Editor

CrazyTalk allows you to swap all the talking scripts from one model to another.

1. Given are two models whose layer orders are described as follows:

Model Page	Layer Status in Stage Panel
	
Two models are added. (The female model is added before the male model)	The female model has a higher level than the male model.

2. When the models move and overlap with each other, the result is as follows:

Model Transformed	Model with Special Effects
	

3. Click the  button besides the name of the female model and select **Swap/Dad** in the pop-up menu to move only the model down one level without the talking scripts. You may optionally [modify the layer order](#) for each models.



4. The male model swaps all the talking scripts with the female model as a result.



► Aligning Model Position

The **Aligning Model Position** feature facilitates offsetting the model's location between two talking scripts, so you do not have to repetitively move and check the model's position in order to align it to the second talking script.

Please follow the steps to align the model:

1. Prepare one talking script and add it to the character track in the **Stage** panel.
2. Make sure the position of the model is modified at the end of this talking script by setting a **Transform** key.




3. Add a second talking script behind the talking script in step 1. Set one or more **Transform** keys in the second talking script.



Key added in the second talking script.

4. Right-click on the second clip and select **Align** from the menu.

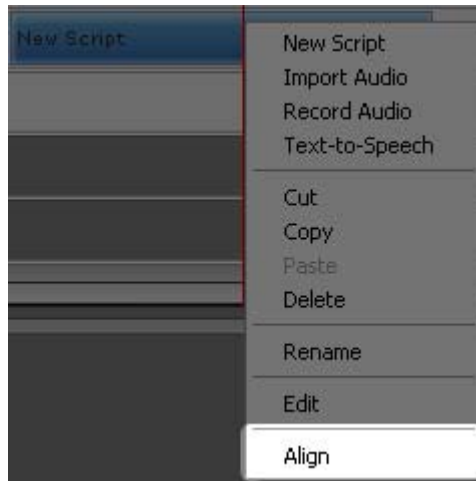

5. **CrazyTalk** automatically offsets all the transform keys in the second talking script to align them to the first talking script.



Note:

- The **Align** feature affects all **Transform** data, including **Move**, **Rotate** and **Scale** data.

► Utilizing Camera to Create Close-Ups

In **CrazyTalk**, you may create camera movements in the **Stage** panel. The effects can be added by setting keys in the **Camera** track or by utilizing the **Auto Zoom** feature to zoom in on the model or models who are speaking to generate close-ups.

Setting Camera Keys Manually


1. Switch to the **Stage** panel on the **Script** page.
2. Click the **Camera Editor**  button to invoke the panel.



- : Select one or more of the three buttons on the left and drag in the **Interactive Area** to **Pan**, **Zoom** and **Rotate** the camera. Click the right-most button to deselect all tools.
 - Click the **Default Key** button to initialize the position and angle of the camera to the origin.
 - Click the **Resume** button to abort any adjustments that were made since the **Set Key** button was last clicked.
3. If you are satisfied with the camera effect, click the **Set Key** button to add a new key into the camera track.
 4. You may check the **Auto Key** checkbox so each camera move you make will automatically overwrite the data of the current camera key.

Auto Zoom

This feature frees you from having to set camera keys one by one. By checking the **Auto Zoom** box, the camera will automatically zoom in on all the models who are speaking. The theory is describe in below illustration:

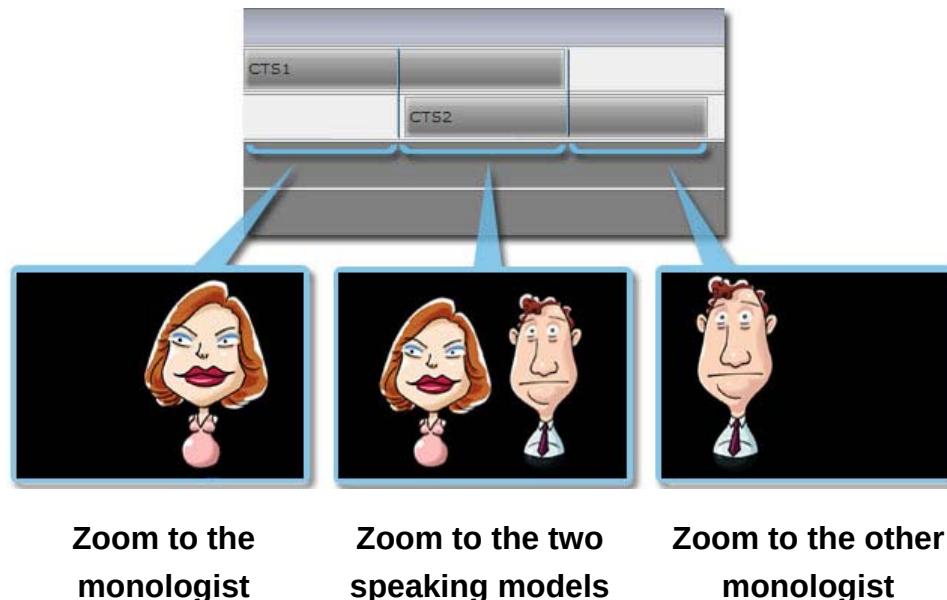

Slow/Fast: Adjust the slider to decide the camera's transitioning speed between each close-up.


Zoom In/Zoom Out: Adjust the slider to decide how far or close the camera should zoom in on the speaking models.

Note:

- The camera keys are overridden temporarily when the **Auto Zoom** checkbox is checked and you may resume them by unchecking the **Auto Zoom** checkbox.

► Resuming Key and Setting Default Key for Camera


There are two features in the **Camera Editor** panel, the **Resume** and **Default Key** buttons, which help you a lot when you want to retrieve the status of the camera.

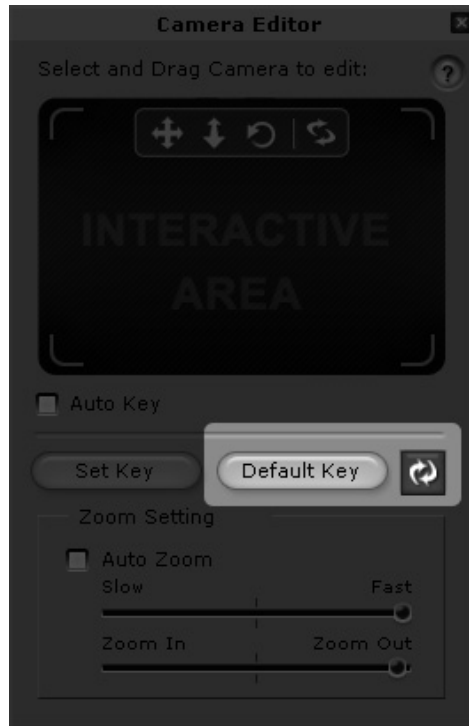


Resuming Key

When you want to discard your current modifications to the camera movements and go back to the last saved status, you may use this method:


1. Double-click on the desired camera key to invoke the **Camera Editor** panel. Please note that the key in our example already contains offset data.

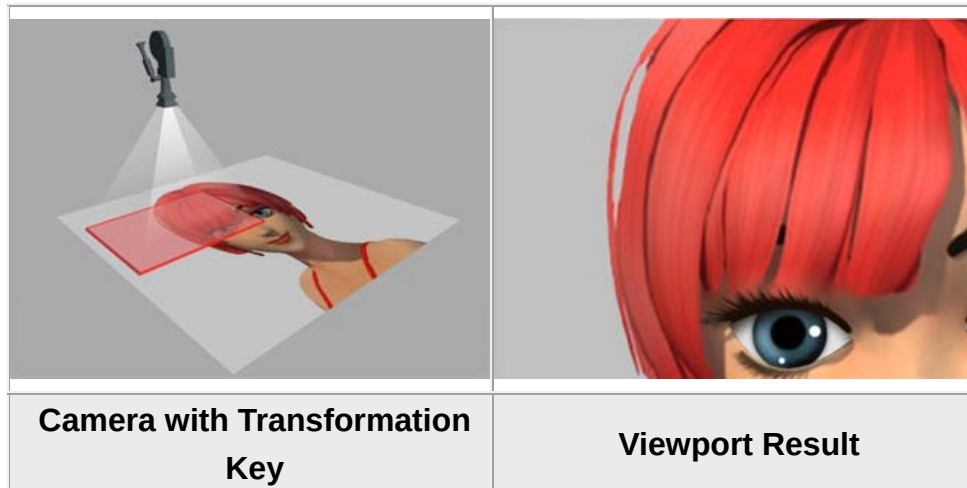

2. Select move, zoom, and/or rotate, then drag in the interactive area to modify the camera position and angle as many times as you want.

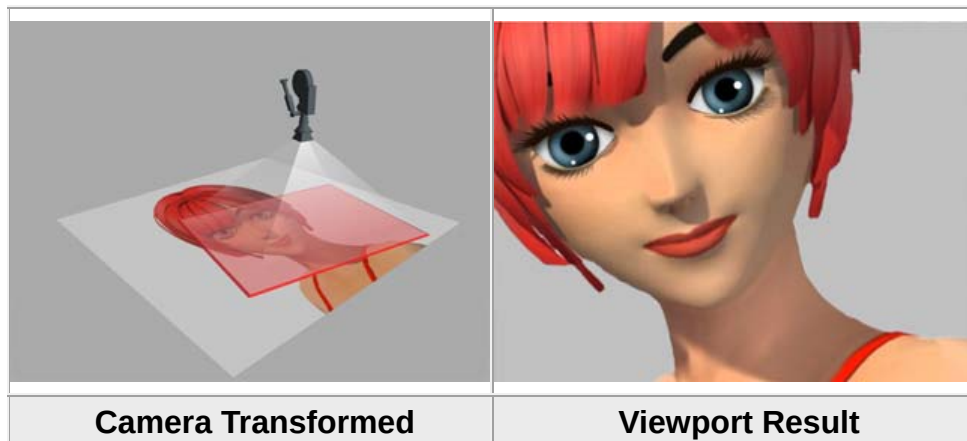


3. Since it is hard to retrieve the original state manually, click the **Resume** button to abort all modifications.

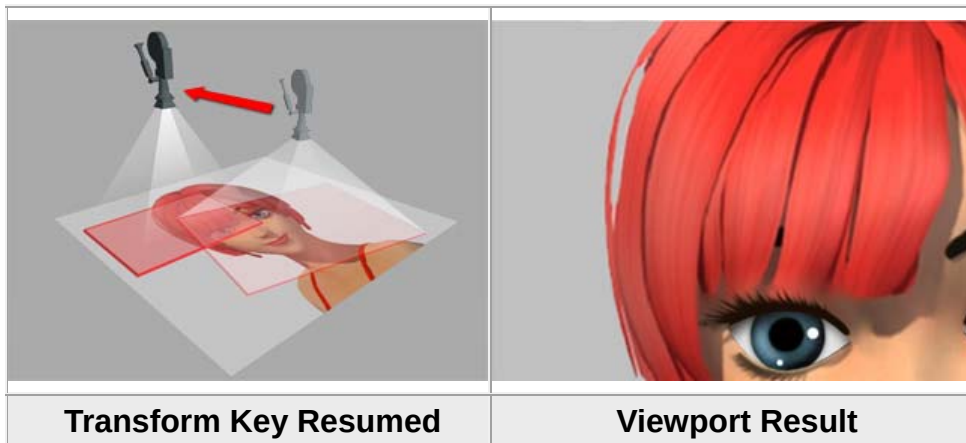


Setting Default Key

Each time you want to remove the transformation key (move, zoom, rotate) and go back to the initial status of the camera, perform the following steps:


4. Double-click on the desired camera key to invoke the **Camera Editor** panel. Please note that the key in our example already contains offset data.

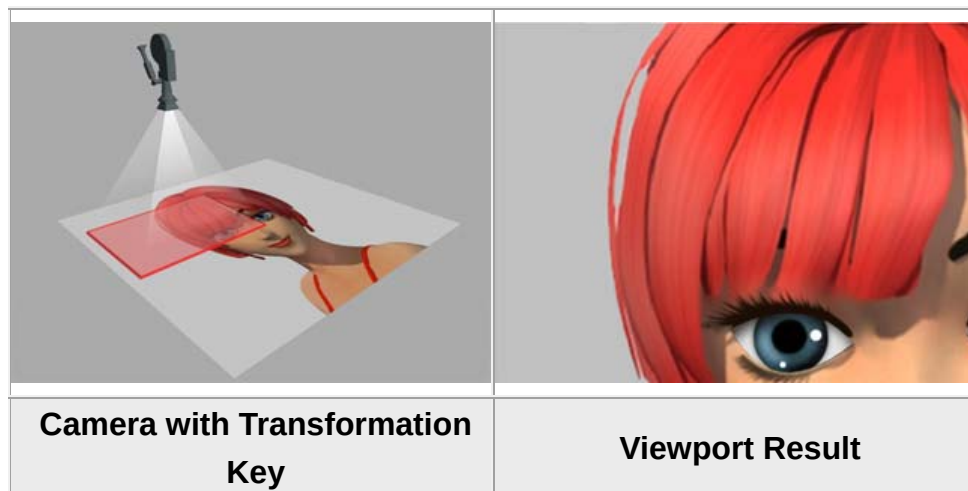

5. Select move, zoom and/or rotate, then drag in the interactive area to modify the camera position and angle as many times as you want. You may even click the **Set Key** button to update the transform data in the key.

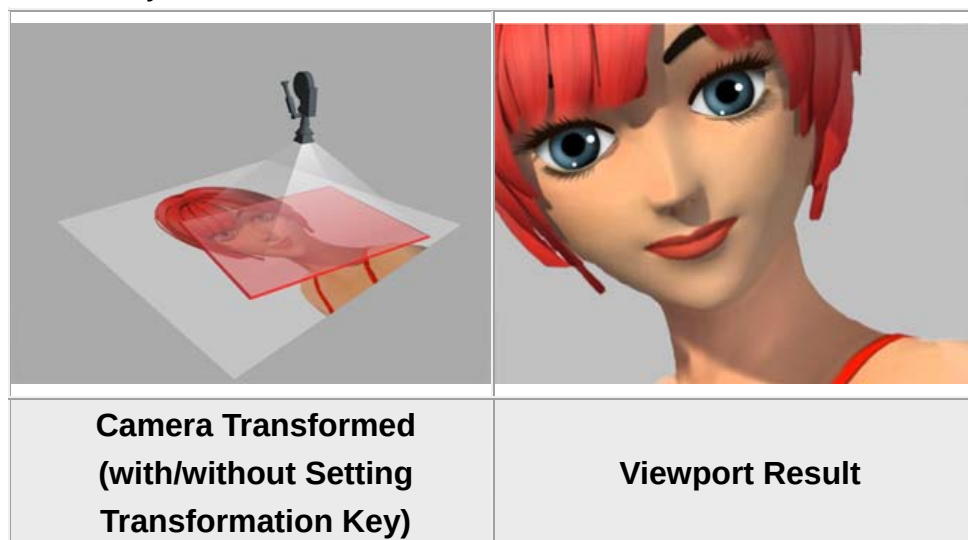

6. Click the **Default Key** button and the offset data will be cleared. The camera goes back to its neutral position and the original key will be replaced by the neutral one.

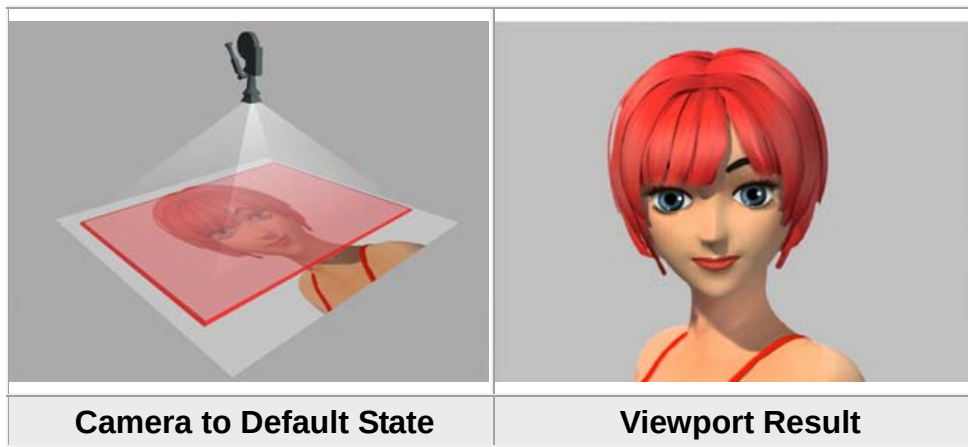

► Adding Background Music

In addition to the main audio script for the models, you can also add background music to the whole project.

To insert background music, click the **Background Audio**  button. The background music dialog box opens.




To insert the background audio, do the following:

1. Click the **Browse** button to import a song or musical track in PCM WAV/MP3 format.
2. Move the **Volume** slider to adjust the volume. You can also enter a number in the box next to the slider to adjust the volume.
3. Check the **Fade In** or **Fade Out** checkboxes to specify if you want the background audio to fade in or out.
4. Click the **Preview** button to play back the background audio.

Introducing the Emotives

Each talking script may be applied with different emotives so the model speaks with different expression in each line. Select one talking script and press the **Emotives** tab in the **Script** page.

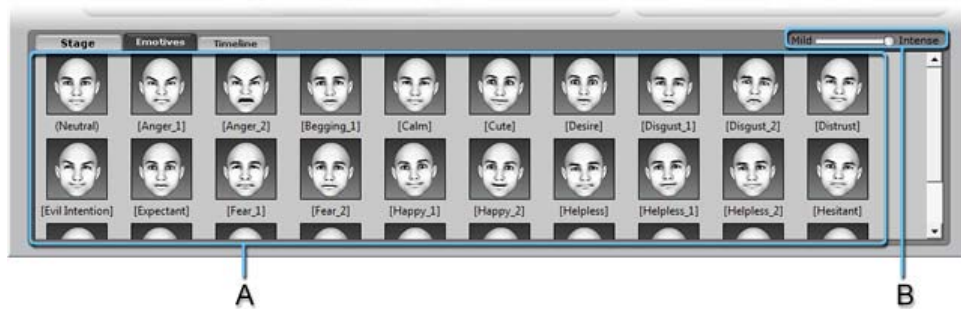

A. Emotive Gallery	This panel lists all the accessible expression templates. Double click on desired expression to apply to the talking script.
B. Strength Slider	Drag the slider to decide the strength of the expression.

► Choosing an Emotive

The **Emotives** tab in the Script page provides various expression scenarios that are a set of voice and facial expression attributes combined with gestures and muscular movements. You can select a happy, sad, angry, or a cute emotive. You can then fine-tune the mood of the model by adding special expressions or facial movements.

To select an emotive, do the following:

1. Click the **Emotives** tab to view a set of basic emotives such as sad, angry, happy, and more.
2. Select the desired emotive from the gallery and double-click it to apply it to the model.


A set of facial expressions and voice tones are applied to the entire track. They are also accompanied by facial movements and special effects.

► Changing the Expression Intensity

You can adjust the strength of the expression on the model's face by using the **Strength**  slider. Move the slider towards **Intense** for stronger expressions. Move the slider towards **Mild** for expressions with a lower intensity.

Introducing the Script Timeline Panel

The animation script consists of many small parts or sequences. The **Timeline** tab on the Script page allows you to add expressions, gestures, facial movements, and special effects to the complete timeline or to the individual sequences. Thus you can customize the model's face to show specific movements and expressions that match the speech or text of the script.

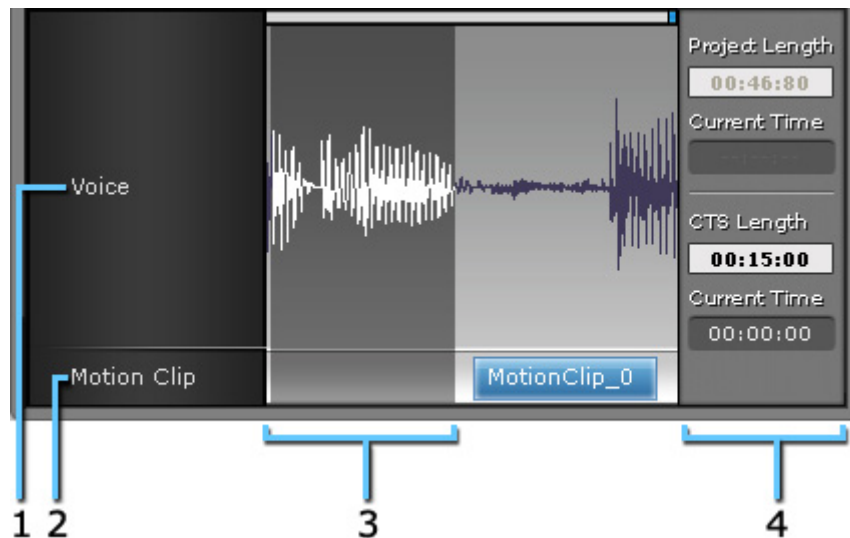

The complete track or the script sequence is displayed under the **Timeline** tab.

1. Voice	Double-click anywhere in the Voice frame to select the complete track.
2. Motion Clip	Make a partial selection on this track and group it to create a motion clip. You may also click Puppeteering button to record a motion clip.
3. Partial Sequence	Click and drag across the Voice track to select a partial sequence. The preview window displays which part of the script you have selected.
4. Time Display	Click anywhere on the timeline or move the cursor to see the time display at that point. The time display displays the following times: • Project Length: Displays the length of the project. • Current Time: Display the time frame the indicator locates. • CTS Length: Length of selected talking script. • Current Time: The relative current time frame the indicator locates.

► Saving a Script

Saving a script allows you to keep all the settings and the status of the timeline. You may retrieve them to have another model perform the same script.

1. Add data into the **Voice** track.



2. Click the **Add** button to save the script into the custom script gallery.

Note:



- If you click the **Add** button while holding the **Shift** key, **CrazyTalk** saves the **SFX** images of each frame in **BMP** format, which can accelerate the saving speed but increase the size of the project.

► Editing the Talking Script: Using the Timeline Viewing Tools

You can view the complete script or enlarge portions of the timeline using the viewing tools as follows:

- Click the **Zoom In**  button to zoom in and view smaller parts of the script in more detail. This is useful if you want to use a wide range of facial expressions for different words of the script.
- Click the **Zoom Out**  button to zoom out and view a larger portion of the script.
- Click the **Zoom Out Full**  button to zoom out and view the complete script in the sequence window.
- Click the **Zoom to Selection**  button to zoom in on the selected area of the timeline.

► Editing the Talking Script: Using the Timeline Editing Tools

CrazyTalk provides basic editing tools to cut, copy, paste or delete portions of the timeline. To select a part of the timeline, drag across the track to select it. You can edit the speech as well as the facial movements and expressions using these tools as follows:

- **Cut** : Cut selected track.
- **Copy** : Copy selected track.
- **Paste** : Paste selected track at the cursor location.
- **Delete** : Delete selected track.

► Editing the Talking Script:

Applying and Creating Voice Effects

The voice for the animated model depends on the audio source for the script. If you create the script by importing a WAV file or by recording using the sound recorder, the model's voice is the voice from the original audio source. If you use the text-to-speech converter to create a script from plain text, you can choose a synthetic voice for the model. However, you can also apply artificial voice effects to the voice for an additional effect.


Applying Voice Effects from Templates



1. Right click anywhere on the **Voice** track and select **Property** from the sub menu. You can also select [part of the timeline](#) to apply the voice effect to that section.
 2. Select the **Template** radio button to select a voice effect from **CrazyTalk**'s templates.
 3. Select a voice effect such as genie, monster, or robot from the template gallery.
 4. Click the **Preview** button to play the script and preview the voice effect.
 5. Click the **OK** button when done.
- The voice effect is applied to the complete speech or voice track.

Creating Custom Voice Effects

1. Right-click anywhere on the **Voice** track to create custom voice effects as follows. You can also select [part of the timeline](#) to apply the voice effect to that section only.
2. Optionally select a voice effect such as genie, monster, or robot from the template gallery first.
3. Click the **Preview** button to play the script and preview the voice effect.
4. Select the **Modify** radio button to modify the template and create your own.

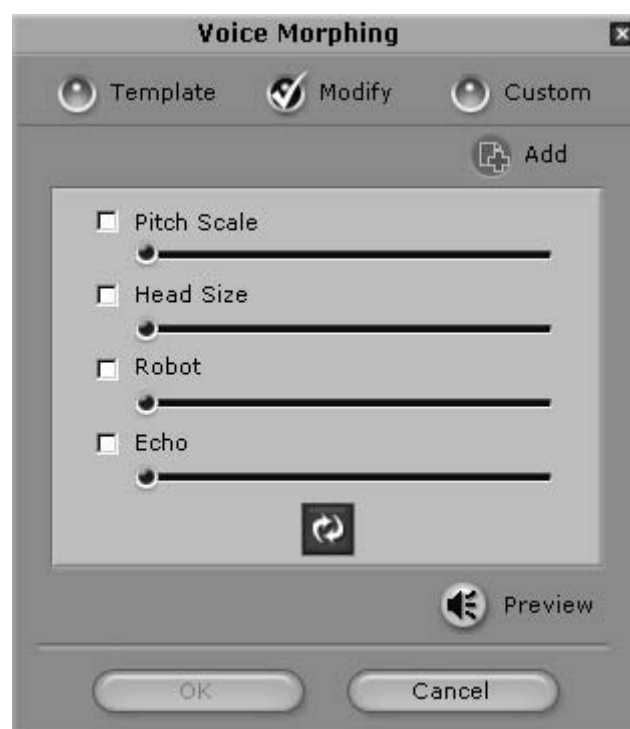

5. Check the **Pitch Scale** checkbox and move the corresponding slider to specify the pitch of the voice.
6. Check the **Head Size** checkbox and move the corresponding slider to make the voice sound more deep-throated.
7. Check the **Robot** checkbox and move the corresponding slider to add a robotic voice effect.
8. Check the **Echo** checkbox and move the corresponding slider to add an echo effect.
9. Click the **Resume** button to clear all settings and restart.
10. After modifying a template voice effect, you need to add the effect to the custom template. Click the **Add** button to add the voice effect to the custom gallery.
11. Select the **Custom** radio button to select a custom voice effect.

12. Select a custom voice effect from the custom gallery. Click the **Delete** button if you want to delete any of the custom expressions.
13. Click the **OK** button when done.

► Editing the Talking Script:

Model Movements and the Background

You may utilize the **Transform** feature to move the models in the project.



1. In the **Model** page, click [Background Mask Editing](#) and specify the background area.



2. Click the [Background Settings](#)  button.
3. Select the **Import** option and pick an image as the background.



4. Back to **Script** page, in the **Puppeteering Panel**, select the transform features you want to adjust and press the **Preview** button.
5. Move your models to view the result.

		
Move	Scale	Rotate

► **Editing the Talking Script:**

Using Motion Clips

CrazyTalk facilitates the collection of motions of solo features and grouping them as a custom **Motion Clips**. You may save clips into the gallery and apply them to any other project at any time.

Note:

- The maximum amount of motion clips is 32.

► Editing the Talking Script: Creating and Adding Motion Clips

Creating Motion Clips

- [Grouping](#)
- [Puppeteering Panel](#)

Adding a Motion Clip to the Gallery

1. Select a desired motion clip in the **Motion Clip** track.
2. Click the **Add**  button or right-click on the selected motion clip and choose **Add Clip** from the menu.

Converting and Adding a Time Sequence into a Motion Clip

1. Drag on the **Motion Clip** track to select a partial sequence.
2. Right-click on the selected sequence and choose **Add clip** from the menu.

The sequence will be converted into a motion clip and added to the gallery.

Note:

- If you click the **Add**  button while holding the **Shift** key, **CrazyTalk** saves the **SFX** images of each frame in **BMP** format, which can accelerate the saving speed but increase the size of the motion clip.

► Editing the Talking Script: Grouping and Ungrouping

If you have a script with expressions applied, you can select a partial sequence to create a custom motion clip for further use.

Grouping to create a motion clip

1. Drag on the **Motion Clip** track to select a partial sequence.
2. Right-click on the selected sequence and choose **Group** from the

menu. You may also click the **Group**  button.

		
Before Grouping	Selection on Motion Clip Track	After Grouping

Ungrouping a motion clip

1. Click to select a motion clip.
2. Right-click on it and select **Ungroup** from the menu. You may also

click the **Ungroup**  button. The keys in the motion clip will be dissected.

Note:

- If the [property boxes of the motion clip](#) are checked, ungrouping a motion clip will keep the keys in the overlapped area.

► Editing the Talking Script: Applying Motion Clips

Applying a Motion Clip


- Double-click on a clip from the gallery to insert it into the current time on the timeline.
- Select a clip from the gallery and click the **Apply**  button to insert the clip into the current time on the timeline.
- Alternatively, you may drag and drop the desired clip from the gallery onto any point of the timeline.



► Editing the Talking Script: Motion Clip Property

Motion Clip Property

After a motion clip is inserted, right-click on it and choose **Property** from the menu, or double-click on the caption of the motion clip in the motion clip track. You are prompted with the **Motion Clip Property** panel. The **Motion Clip Property** settings determines how **CrazyTalk** processes the overlapped clip area, replacing or mixing with the keys of the underlying tracks.

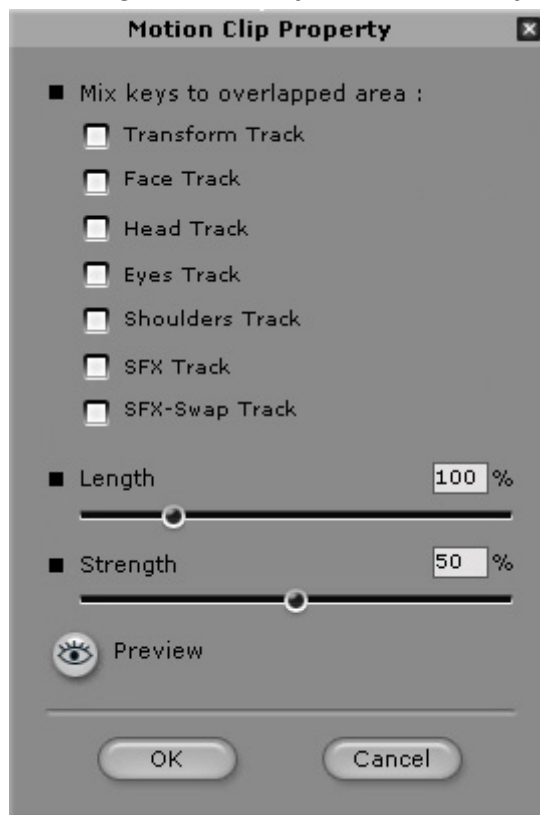


- Check the individual checkboxes so the keys that are overlapped by the motion clip are also used to determine the motion of your character.
- Adjust the **Length** slider to specify the speed of the motion clip.
- Adjust the **Strength** slider to specify the strength weight of all the keys in the motion clip. The default value is 50%.
- Click the **Preview** button to preview the result of the settings in the panel.

► Editing the Talking Script:

Introducing the Puppeteering Panel

CrazyTalk interfaces facial animation with revolutionary real-time puppeteering controls empowering you with command over character facial expressions.

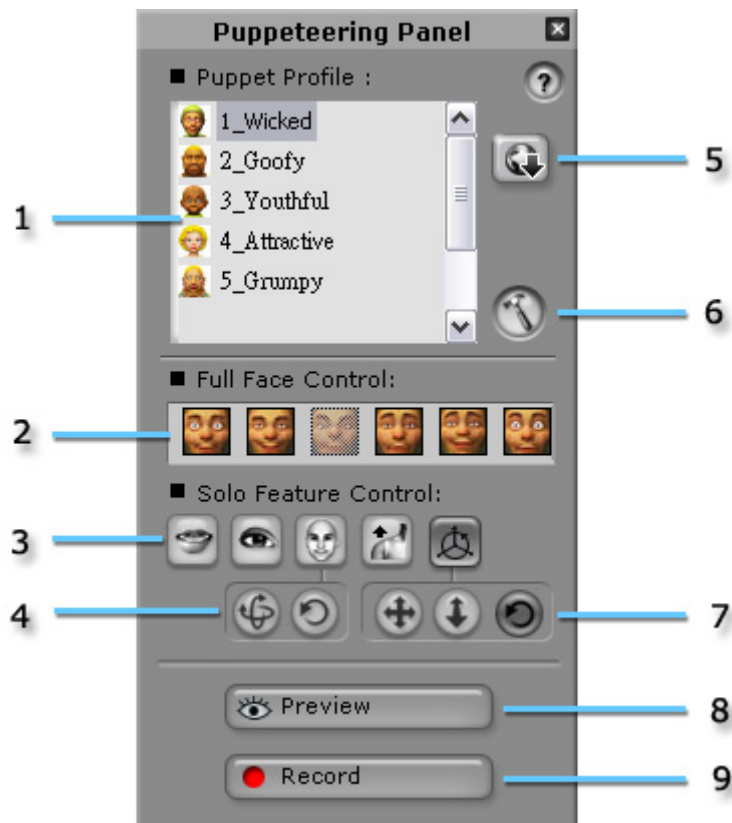

1. Puppet Profile	Select one of the built-in profiles with different personality from the list. Each profile contains various expressions.
2. Full Face Control	Select one of the expressions with pre-defined weight settings for various facial features.
3. Solo Feature Control	Select the desired features to covert the changes of them into motion clips automatically during recording.
4. Add Head Motions	Select these to change the rotation/tilt of the head. The changes will be converted into keys during recording automatically.
5. Add From Web	Click this button to open our content store on the web to purchase more profiles.
6. Settings	Click this button to invoke the Puppeteering Settings panel.
7. Add Transform Key	Select these to move the model. The changes will be converted into keys during recording automatically.
8. Preview	Click this button and then press the Space bar to preview the expressions triggered by your input device (Mouse by default).
9. Record	Click this button and then press Space bar to start recording a motion clip. Press the Enter key to start half-speed recording mode. While you move your mouse to drive the motion expression during the recording, keys will be automatically inserted into the timeline.

► Editing the Talking Script:

Full Face Control Puppeteering

1. Drag on the **Motion Clip** track to select a partial sequence or click on any point of time to start a motion clip for recording.





2. Click the **Puppet Control** button.
3. Pick a desired profile from the **Puppet Profile** list.




4. Choose a preset in the **Full Face Control** list.



5. Click the **Preview**  button and press the **Space bar** to start previewing. The cursor will be automatically positioned in the center of the **CrazyTalk** window.

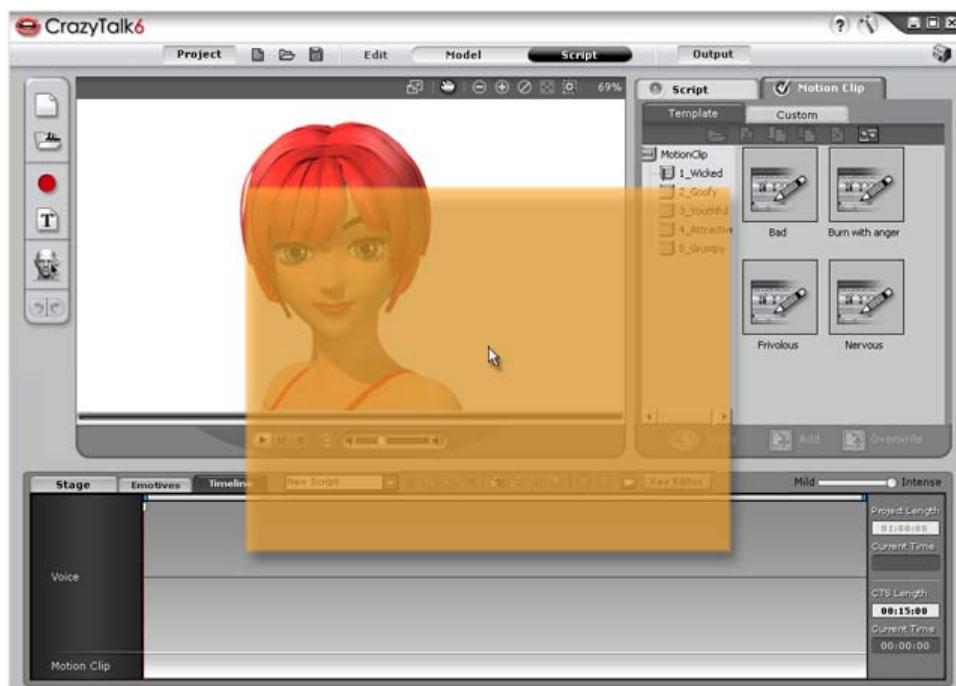

The Mouse Interactive Area for Puppeteering

6. Move your mouse to puppeteer your model. Press the **Space bar** again to stop previewing.
7. Click the **Record**  button and press the **Space**

bar to start recording the motion as puppeteered by your mouse.
(Press the **Enter key** to start half-speed recording mode)

Note:

- You can use the hotkeys 1, 2, 3, 4, 5 to switch to another **Puppet Profile** and Q, W, E, R, T, Y to change to another **Full Face Control** profile during the previewing or recording.
- Click the **Add From Web**  button to visit our web site to purchase more profiles.


► Editing the Talking Script: Multi-Layer Recording

1. Creating motion clips with the **Puppeteering Panel** can be easier by applying a **multi-layer recording** concept.

2. Click the **Zoom in**  button until the desired partial sequence for creating a motion clip fits the timeline view. This ensures that the length from each layer recording remains the same.

3. Click the **Puppet Control**  button. You may optionally utilize any preset in the [Full Face Control](#).

4. Click the **Preview**  button and press the **Space bar** to start previewing. The cursor will be automatically positioned in the center of the **CrazyTalk** window.

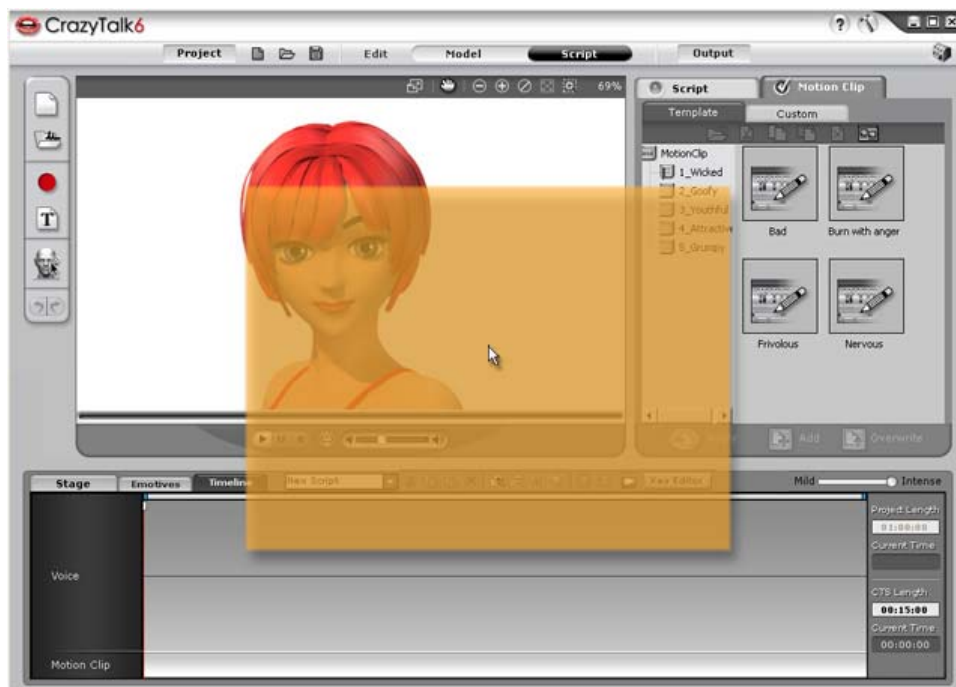

The Mouse Interactive Area for Puppeteering

5. Move your mouse to puppeteer your model. Press the **Space bar** again to stop previewing.
6. Click the **Record**  button and press the **Space bar** to start recording the motion as puppeteered by your mouse. (Press the **Enter key** to start half-speed recording mode)


7. Repeat steps 3 to 6 until you are satisfied with the model's expression results. Each recording will blend the effects to the motion clip layer by layer.

Note:

- Check the **Blend data on next recording** checkbox in the [Puppeteering Settings](#) panel to activate the multi-layer recording.

► Editing the Talking Script: Puppeteering Settings

In the Puppeteering Panel, click the **Setting**  to invoke the **Puppeteering Settings** panel.

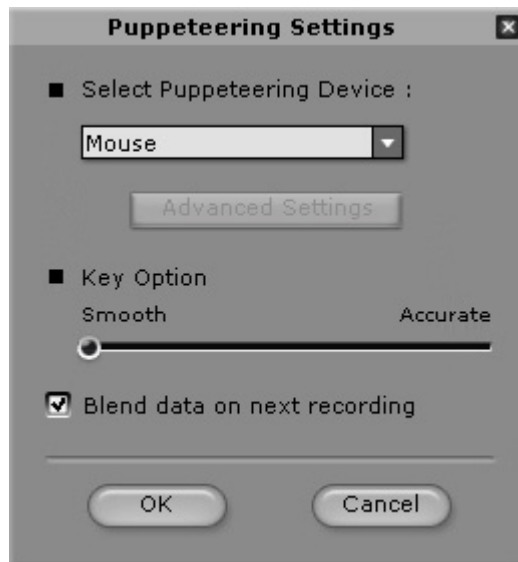

- **Select Puppeteering Device** - You may specify the input device that is used to trigger the movements of your character during recording.
- **Key Option** - Recording in various levels of accuracy. The closer the slider is moved to the **Accurate** end, the more details will be recorded as the mouse moves.
- **Blend data on next recording** - Activate this checkbox so the new motions of the selected features are blended into to existing keys after recording.

Creating a 3D Stereo Project

- [The Concept of 3D Stereo Vision](#)
- [Creating a 3D Stereo Project in CrazyTalk](#)
- [Environment for Viewing 3D Stereo Media](#)
- [Viewing Methods of 3D Stereo Media](#)


Please visit our web site for [Additional Video Demos and How-to Documents](#).

► The Concepts of 3D Stereo Vision

There are two primary factors to generate a 3D stereo vision, **Convergence** and **Parallax**.

Convergence

The convergence is the angle formed by your eyes and the observed object. The higher the angle value is, the nearer the observed object is to your two eyes, and vice versa.

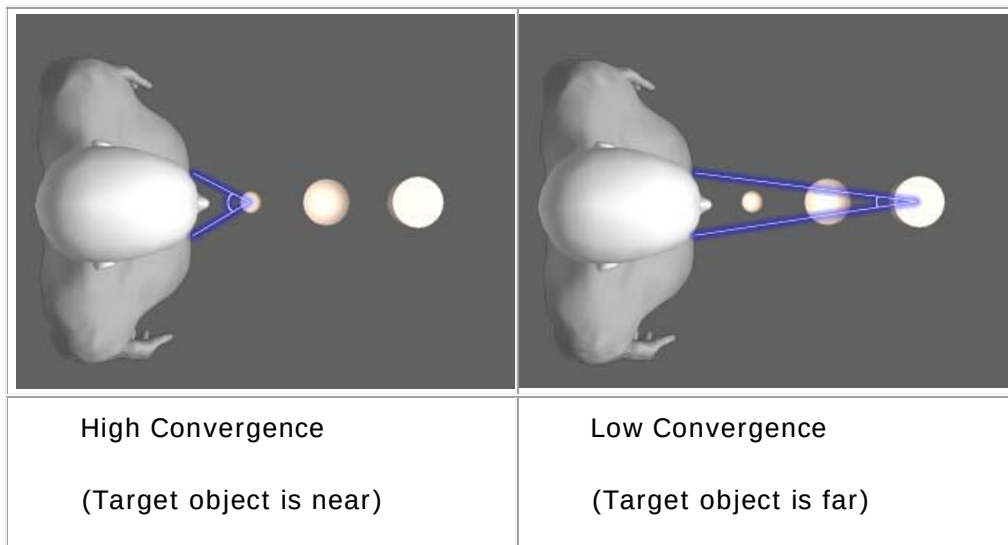

Therefore, when the convergence is fixed, any object between you and the convergence point will be closer to you, while the object beyond the convergence point will be farther away from you.


Please note that if the **Convergence** is higher than 6 degrees, which means the object is too close to you, then your eyes feel uneasy. On the contrary, when the value is too small, which means the object is too far, the stereo sensation will be lost.

Parallax

The parallax images are the images passing through to your left and right eyes. All 3D stereo media contain a pair of parallax images that individually, and simultaneously, pass to your left and right eyes. This is to convince your brain that there is an existence of depth in the media.


Positive Parallax

When the target object offsets to the right in the left image, and offsets to the left in the right image, then your binocular focus is lead to fall behind the display. This phenomena is called **Positive Parallax**.

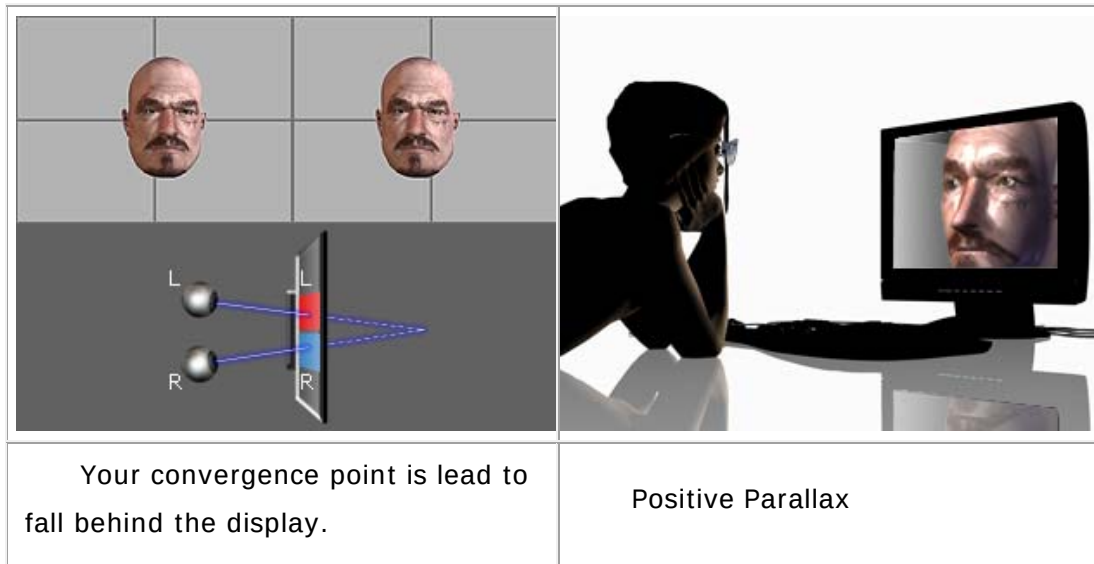


Zero Parallax

When the paired parallax images superimpose on the display, then your binocular focus is lead to fall on the same display, which is the **Zero Parallax**.

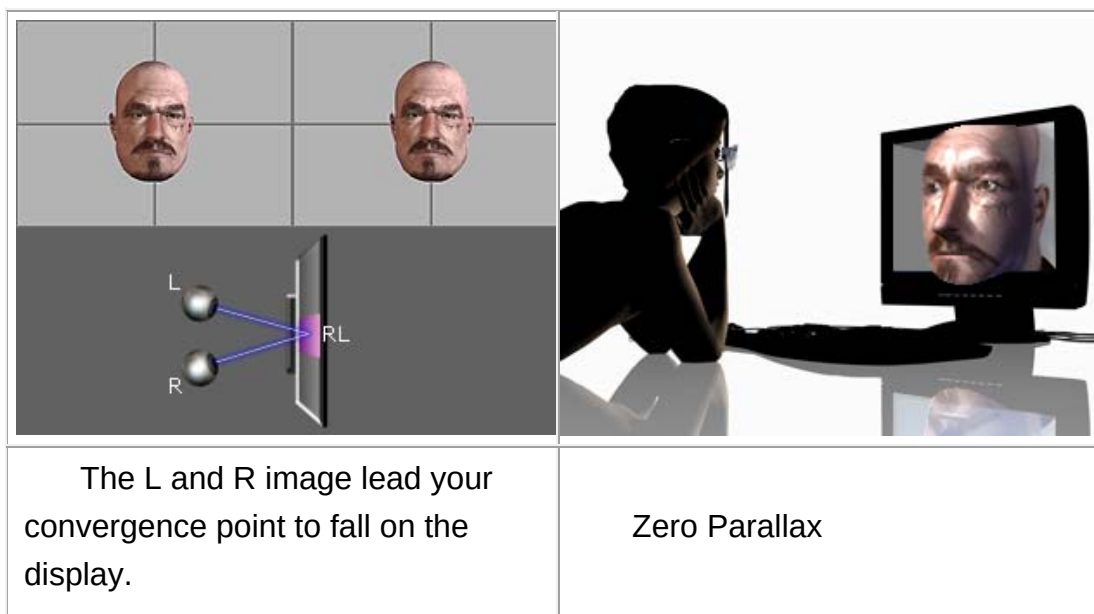

Negative Parallax


When the target object offsets to the left in the left image, and offsets to the right in the right image, then your binocular focus is lead to fall in front of the display. This phenomena is call **Negative Parallax**.

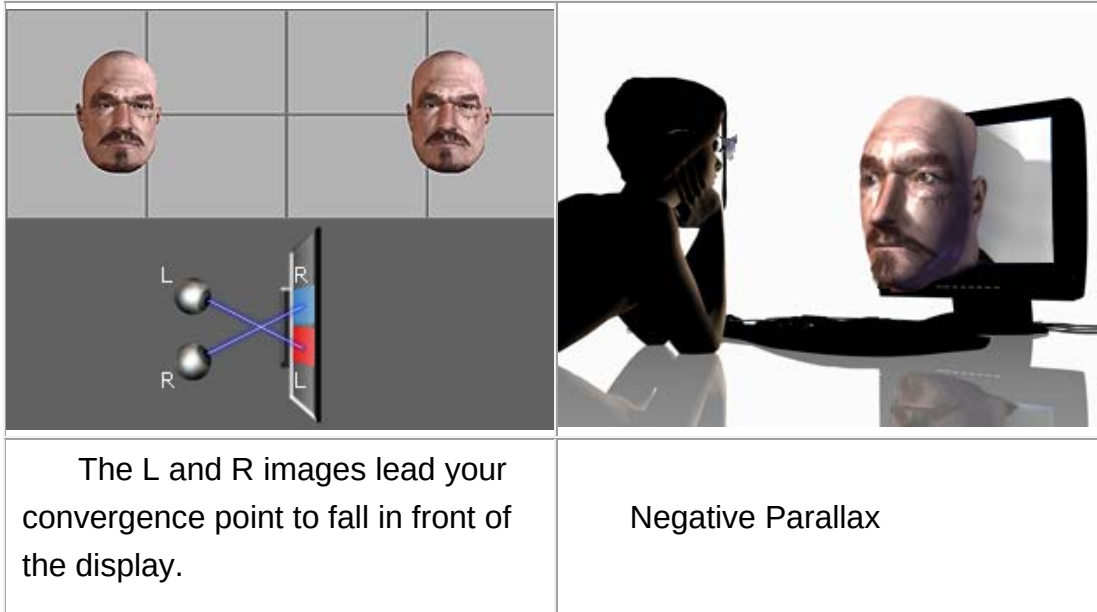

► Creating 3D Stereo Projects in CrazyTalk

If you want to output a 3D stereo media, then please follow the steps below:

1. In the **Output** page, click on the **Media** tab.
2. Enable the **3D Stereo Vision** box. Choose the **Anaglyph (Red/Cyan)** or **Side by Side** radio button.
3. Drag the slider to define the value for **Display Distance**.

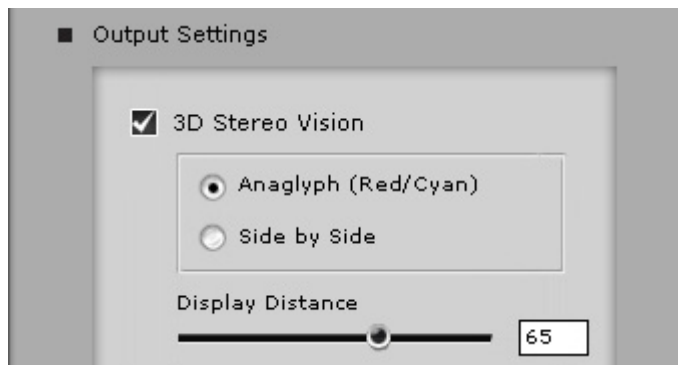

Display Distance


The **Display Distance** value decides the [convergence](#) distance as you playback the output media. The higher the value, the closer the objects tend to pop-up in relation to the convergence point. The lower the value, the farther the objects move to the back of the convergence point.

In the illustrations below, the **CrazyTalk** project is taken as a box with the character and comic effects integrated.



Profile and Display Distance


Take note that the profile of the character may affect the depth value of the whole 3D stereo project. For more information, please refer to the [Specifying Face Orientation and Style](#).

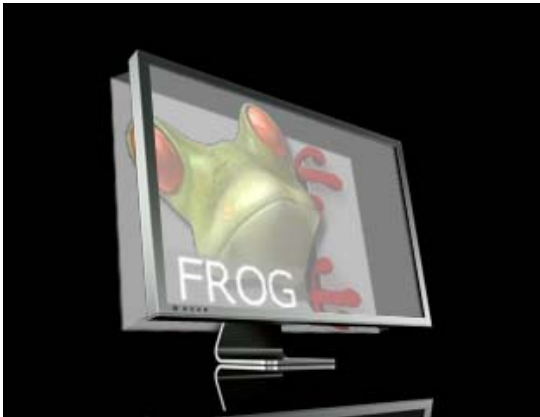	
Profile Strength: Weak (Display Distance = 0)	Profile Strength: Strong (Display Distance = 0)


Since all **CrazyTalk** projects are layer-based, the user should properly arrange all special effects and characters for a better 3D stereo result. .

Layers in CrazyTalk


There are 4 layers in one **CrazyTalk** project:

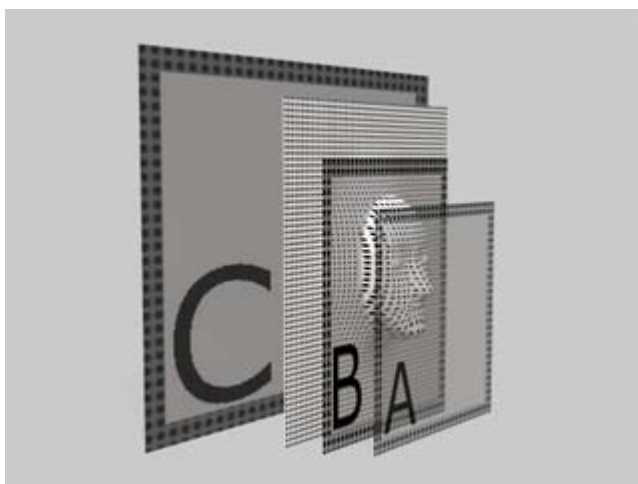

- **Layer A:** This layer shows the effects on the **SFX** track. It is located at the top of the character's nose. If the face [profile](#) is strong, then **Layer A** will be farther away from the character.

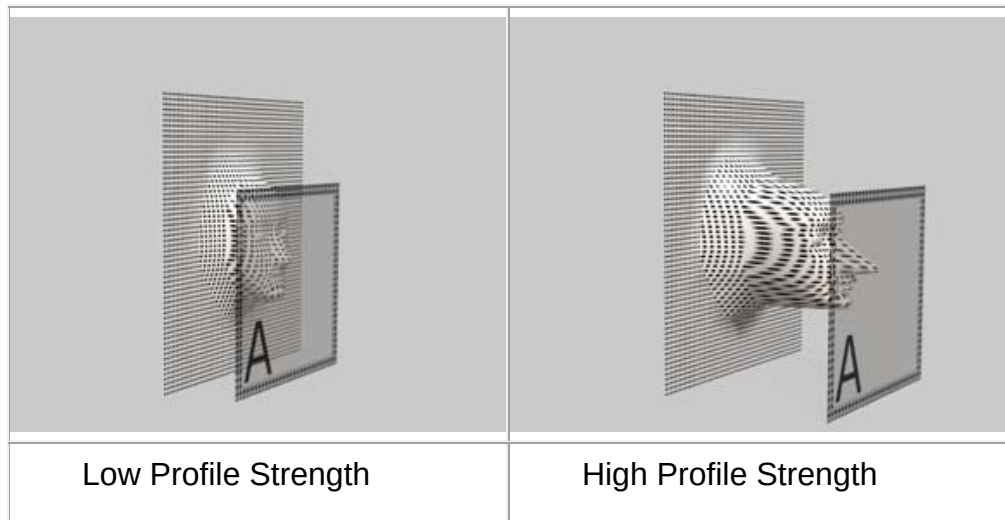

- **Layer B:** This layer shows the effects on the **SFX-Swap** track. It is located between the character and **Layer A**. Also, depending on the personality of the comic effect, the layer may be at the position of the eyes, nose or mouth.

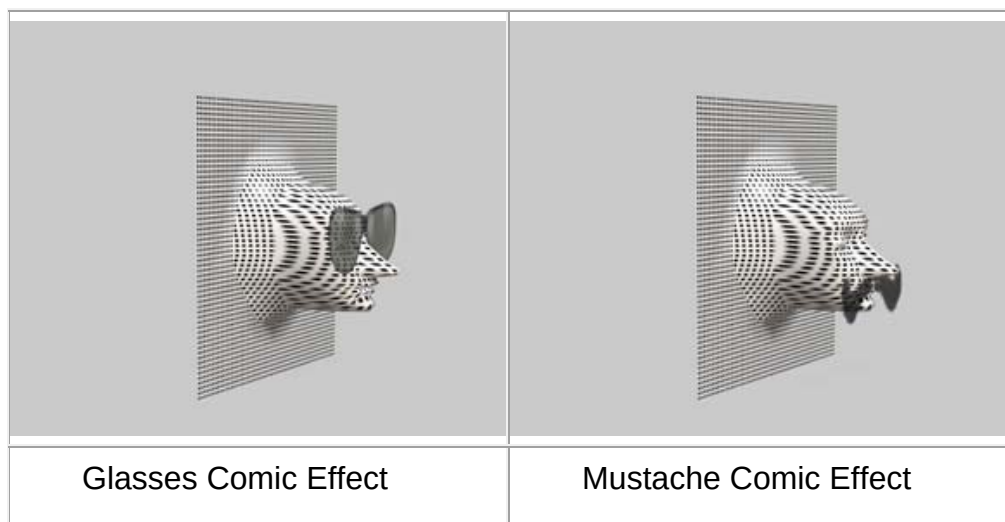

- **Character Layer:** This is the character layer. You may use the [mask feature](#) to cut out the character.
- **Layer C:** This layer shows the background color or image.

► Environment for Viewing 3D Stereo Media

After exporting your 3D stereo content, you may need some specific viewing devices.

	No 3D Device Required	3D Device Required	
	Anaglyph (Red/Cyan)	Polarization	Shutter
Stereo Format	Anaglyph	Side by Side	Side by Side
Player	Any General Video Player	3D Player (Usually Bundled with 3D Displays)	3D Player (Usually Bundled with 3D Displays)
		Free	Free
		- Stereo Movie Maker - Stereo Movie Player	- Stereo Movie Maker - Stereo Movie Player - nVidia 3D Vision Player
		Paid	Paid
		- DDD Player - Stereoscopic	- DDD Player - Stereoscopic
Glasses	Red/Cyan Glasses 3D Passive Glasses List	Polarization Glasses 3D Passive Glasses List	Shutter Glasses 3D Active Shutter Glasses List
Display	General Display	3D Display (Polarization)	3D Display (Shutter)
Graphic Card	General Graphic Card	General Graphic Card	3D Graphic Card (nVidia 9600 or above) NVidia Total Solution
For more information on available 3D products, please refer to the			

[Available 3D Products](#) page.

Also visit our web site: [Additional Video Demos and How-to Documents](#).

► **Viewing Methods of 3D Stereo Media**

- [Viewing with Any Device](#)
- [Viewing with Specific External Devices](#)
- [Viewing with Bare Eyes](#)
- [Viewing on YouTube](#)

► Viewing with Any Device


If you would like to view your 3D stereo media with any common device, then you may export the media in **Anaglyph** format. The only equipment needed is a pair of **Red-Cyan** glasses.

Anaglyph (Red /Cyan) Method

This method employs anaglyph media and anaglyph filters. Anaglyph media can be videos or images made of two color layers. These two layers, containing differently filtered colored images for left and right eyes (as described above), superimpose in each frame (for video) or image.



In order to produce the sensation of depth, you must use two identical color filters (**Red-Cyan** glasses) to pass images separately to the left and right eyes. However, this method can result in color-loss issues due to the colored filters.

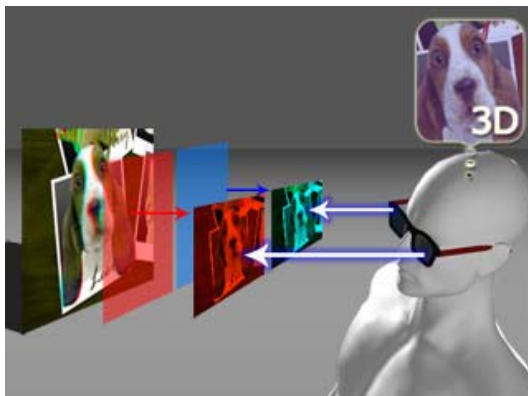


► Viewing with Specific External Devices

If you would like to view your 3D stereo media without any color loss issue present in the anaglyph solution, then you may choose to export your media in **Side by Side** format. However, this method requires specific playback devices for viewing.

Side by Side Method

In order to have a better stereo vision experience, then it is recommend that users employ the following prerequisites:

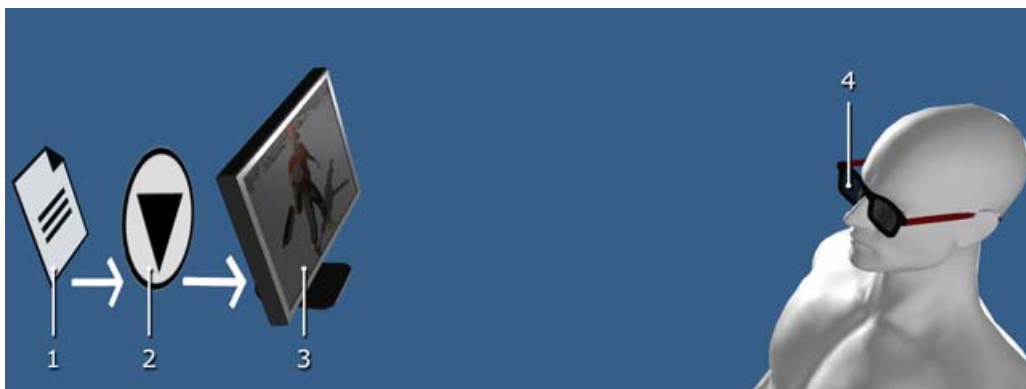

1. Side by side media (exported from **CrazyTalk**).
2. Specialized player (for creating alternating-frame sequencing or superimposed video).
3. Specialized display.
4. Filtering devices (for separately filtering images to the left and right eyes).

The interval time to playback the left and right images are rather short. The human brain takes the paired images and synchronizes them together in order to generate the feeling of depth.

For more details about players, displays and filter devices, please refer to the [Environment for Viewing 3D Stereo Media](#) section.

► Viewing with Bare Eyes

Side by Side Method - Without Equipment

This method utilizes media that consists of a pair of side-by-side offset frames (for video) or images. You do not need any special device to view this media, you only need to adjust the focus of your binocular vision so that the images from both sides overlap with each other.



In order to overlap the paired frames, or images, and sense the depth of the media, you may employ your bare eyes with the **Parallel Viewing** technique.

Parallel Viewing Method

You may need to practice in order to learn how to use this viewing technique:

1. Look at any far away object that is beyond your display device.
2. You may then notice that the two actors may double and appear as four.



3. Then adjust your eyes so that the two actors, in the middle, overlap with each other. Eventually you will see the 3D actor pop-out in front of you.




► Viewing on YouTube


Uploading to YouTube

If your 3D stereo media is in **Anaglyph** format, then you may simply upload it to **YouTube** with any conventional method. If you would like to upload your 3D stereo media to **YouTube** in **Side-by-Side** 3D format, then follow the steps below:

1. Prepare your 3D stereo media.
2. Upload it to **YouTube**. In the **Tag** section, type in "**yt3d:enable=true**".

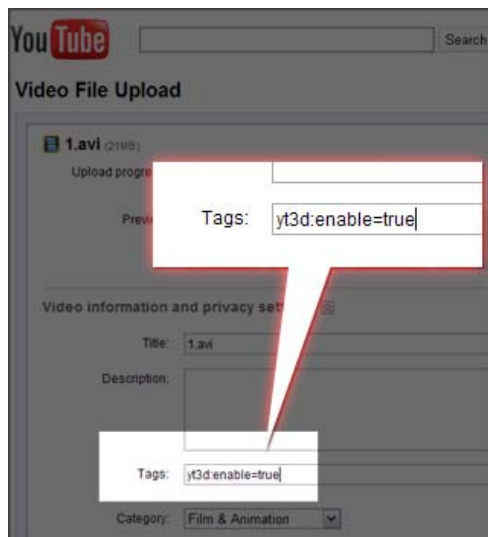

3. Visitors may use **YouTube** as a 3D player by selecting the media type in the drop-down list.

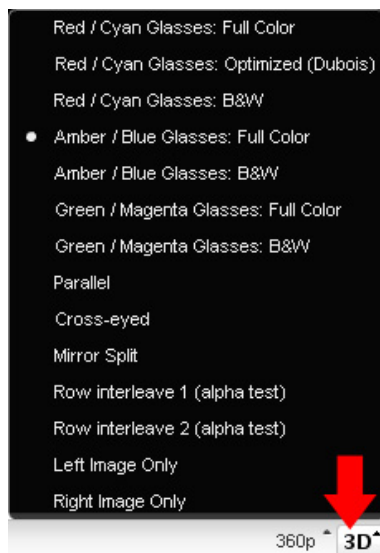


Note:


- If the 3D result is not correct, you may add "**yt3d:swap=true**" to fix the issue.
- If you choose any type other than two-color methods in step 3, then you must have [specific display devices](#) to perceive the correct 3D stereo effect.
- For more details on 3D stereo settings, please refer to the **YouTube** [Getting Started: 3D Content](#) page.

OUTPUT

Introducing the Output Page

CrazyTalk now offers the convenient feature of exporting your talking images to multimedia formats that are compatible with a wide range variety of devices. For instance, you can convert your talking message to an **AVI** file with **DVD** quality, or for uploading to **YouTube**. You can convert it to sequenced image (BMP/TGA/PNG) files or a streaming RM (Real Media) file to broadcast on a web server. Exporting **Flash** files is also supported so you may output your talking model as a flash animation.

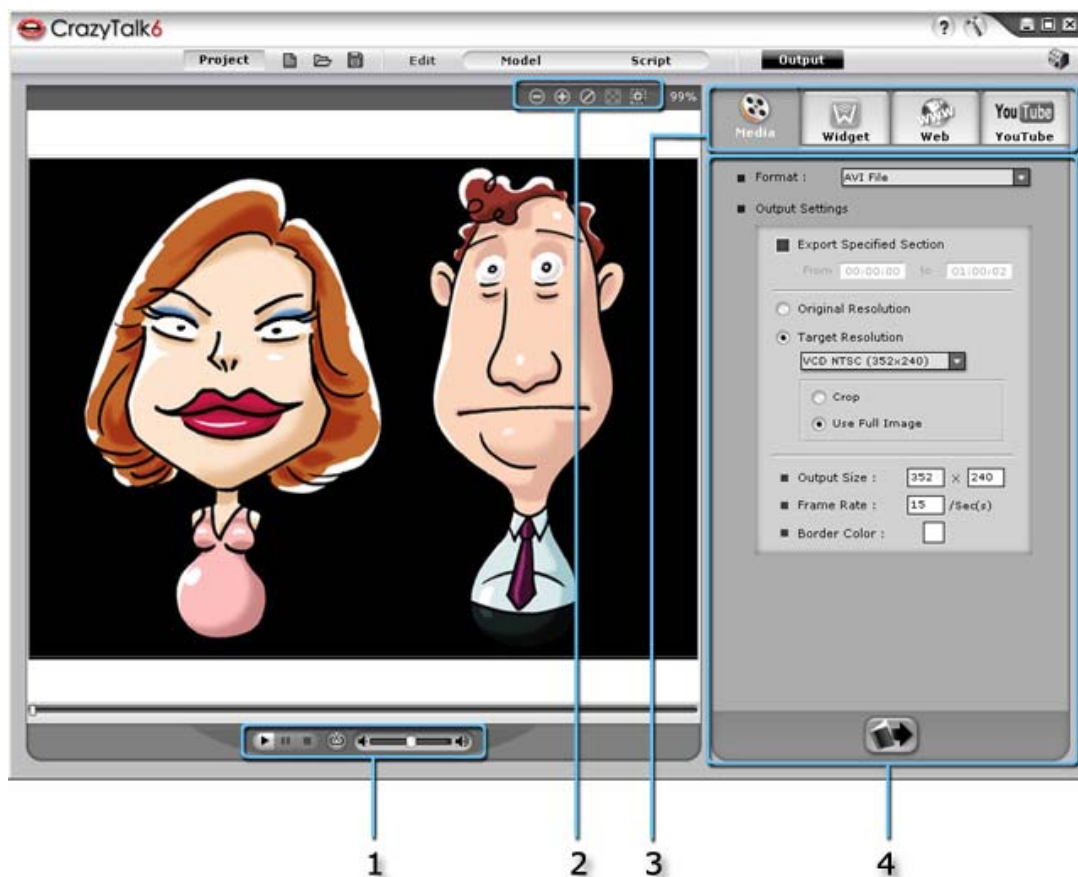

1. Playback Control	•  : Playback script. •  : Pause playback of script. •  : Stop playback of script. •  : Loop playback of script. •  : Adjust volume.
2. Viewing Tools	•  : Zoom In - Enlarge image to increase clarity. •  : Zoom Out - Reduce magnification to increase the area of visibility. •  : Fit to Window - Resize image to fit it in the viewport. •  : Original Size - Display image at original size and magnification. •  : Drag Zoom - Drag a marquee across the image and enlarge the selected area.
3. Mode Tabs	•  : Output Video/Sequenced Images/Wave Files. •  : Output Widget Files. •  : Output Files for Web. •  : Upload Files to YouTube.

4. Output Settings


- Provides tools for specifying the output media format, area for export, target resolution, custom output resolution, and frame rate for the exported media file.

Note:

- If you want to export into the WMV file format from **CrazyTalk**, you will need to first download and install WMVEncoder9 from the Microsoft website.

General Output Settings

The general output settings for **Video**, **Image**, and **Web** are described in this section.

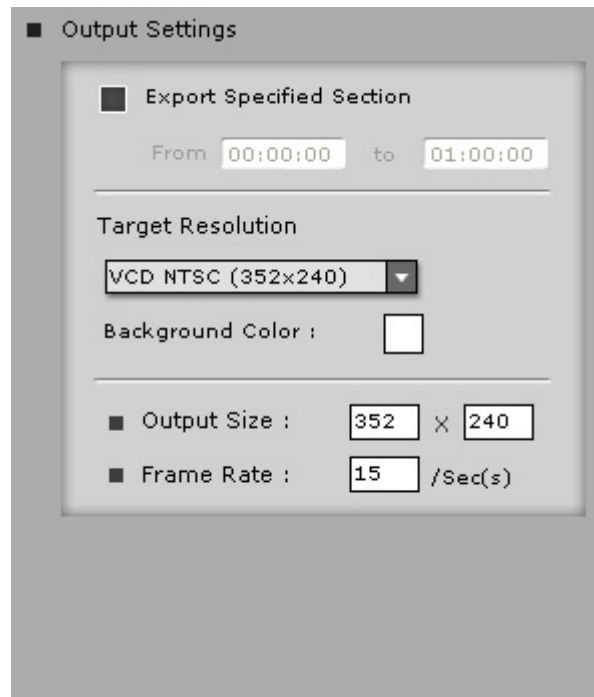



The screenshot shows a dialog box titled "Output Settings". It contains several options and input fields:

- ☒ **Export Specified Section**
 - From: 00:00:00 to: 01:00:00
- Target Resolution**
 - Dropdown menu: VCD NTSC (352x240)
- Background Color**: A small square color selection box.
- Output Size**: Two input boxes showing 352 and 240, separated by a multiplication sign (×).
- Frame Rate**: An input box showing 15, followed by "/Sec(s)".

- Check the **Export Specified Section** option if you only want to export a specific part of the project.
- Check the **Target Resolution** option if you want to specify your own target resolution. Select the desired resolution from the drop-down box. You can select from **DVD** or **VCD** with **PAL/NTSC** formats.
- Click the **Background Color** box to select the background color from the color palette.
- Specify your own desired resolution for the output frame by entering the height and width in pixels in the **Output Size** boxes.
- Enter the desired frame rate in frames per second in the **Frame Rate** box.


Cropping

The cropping feature provides you with a method to have a custom area on the image enlarged to fit into the desired output size. We will utilize 320 x 240 output size to describe the principle.

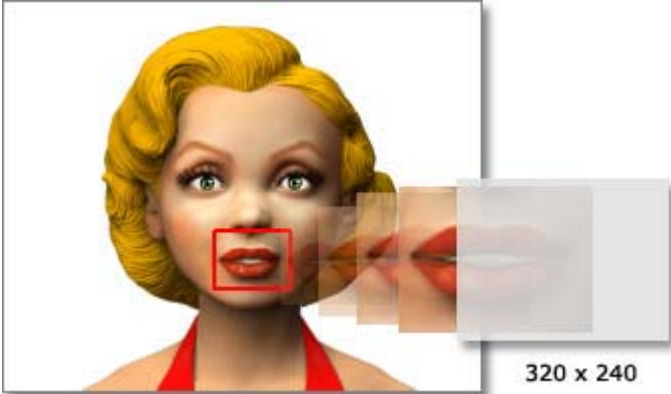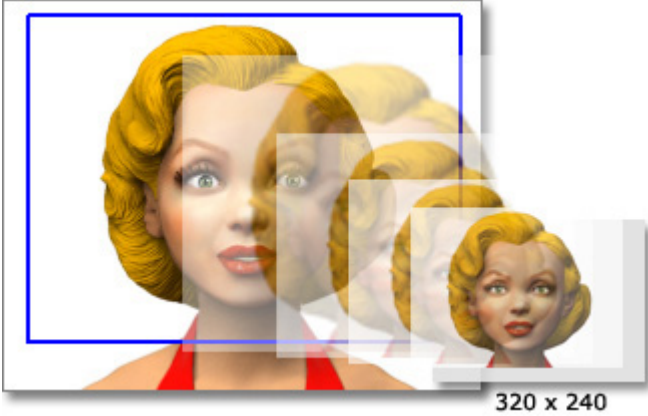Cropping	Output Result
	 320 x 240
The cropping box turns to red to indicate that the size for cropping is smaller than the output size.	The cropped image is expanded to fit into the desired output size.
	 320 x 240
The cropping box turns to blue to indicate that the size for cropping is equal or greater than the output size.	The cropped image is shrunk to fit into the desired output size.

Output Media

In this panel, you may choose to export project as Video, Sequence Images or Wav files.

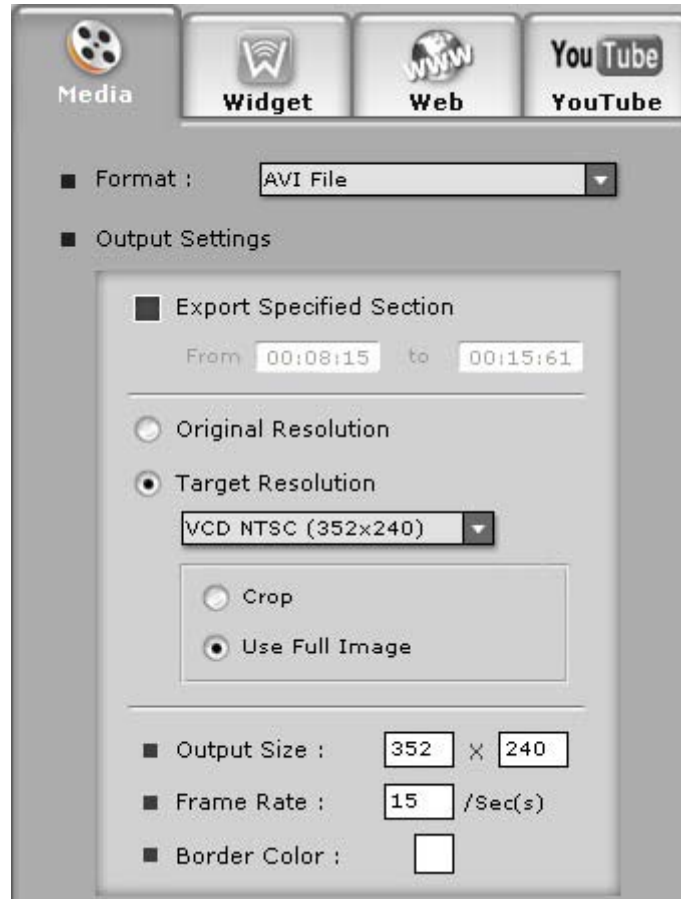

Please follow the steps to output video files.




1. Click Video  tab to toggle the output mode.
2. Select the format in the Format drop down list.
3. Modify the [Output Settings](#).
4. Click **Export** .

Output for 3D Stereo Media

If you want to output 3D stereo media, then please refer to the [Creating 3D Stereo Projects in CrazyTalk](#) section for more information.

Output for Widget

CrazyTalk offers you the feature to output CrazyTalk Projects as .swf videos. Please follow the steps below.

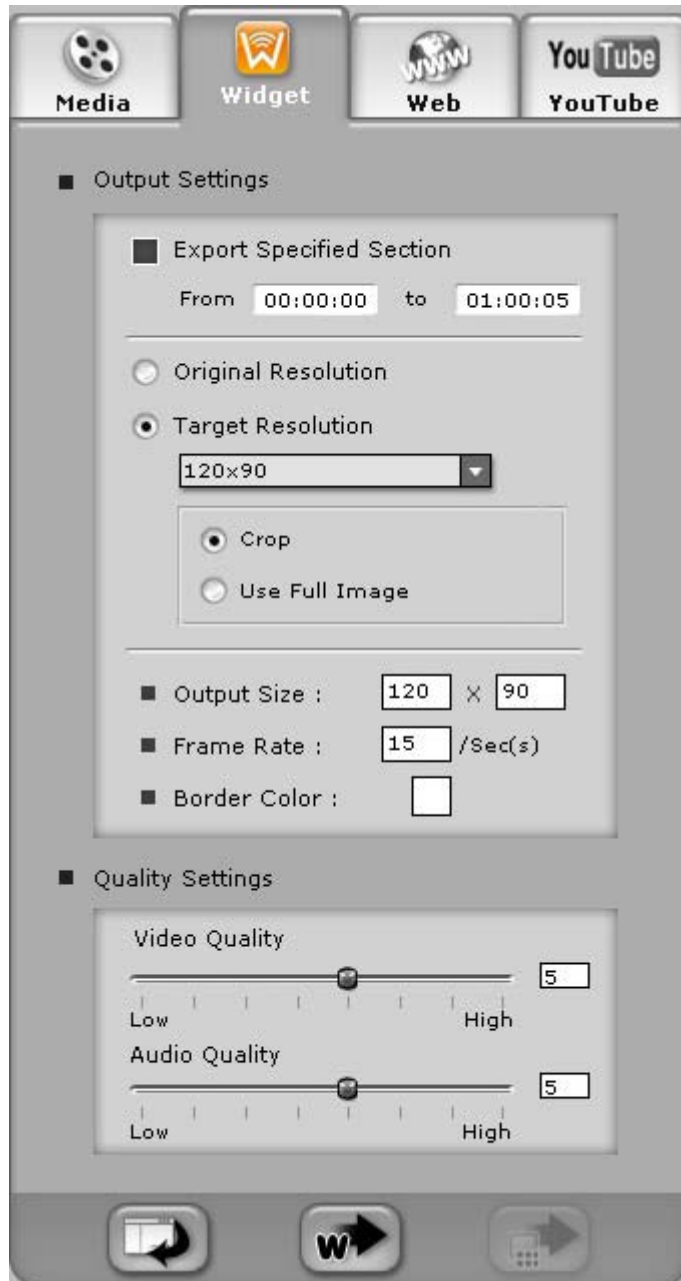

1. Click the **Widget** tab to toggle the output mode.
2. Check **Export Specified Section** option if you only want to export a specific part of the project.
3. Modify the Output Settings.

4. Adjust the sliders to set the **Video** and **Audio** quality.
5. Click the **Launch Editor**  button to import into the Widget Editor.
6. Click the **Export Widget File**  button to export as an iWidget file.
7. Click the **Export Web Avatar**  button to export as .swf video.

Note:

- The **Export Web Avatar** button will be disabled when the current project is not a Web Avatar project.
- To learn more about how to create an interactive head on the web, please visit [creating custom web avatar](#).

► Creating Custom Web Avatar File

After you export a **Web Avatar** via the **Widget/Export Web Avatar**



button with the **Web Avatar** project, you can see the result as follows in your browser. It is actually a player for playing flash files along with various events:



	Item	Event Triggered	File Played	File Location
A	Player	Idle Flash Played (default)	idle0.flv idle1.flv idle2.flv (Randomly Played)	(same folder as the html generated)\media\
B	Play Button	Button Clicked - Main Talking Script Played	script01.flv	(same folder as the html generated)\media\
C		Cursor Over the Avatar (Avatar looks at the cursor)	lookat.flv	(same folder as the html generated)\media\


► Custom Avatar

To generate your custom avatar with the same talking scripts, you may simply perform the steps below:

1. Go to the **Project** page and apply the **Web Avatar** template from the gallery.
2. Go to the **Model** page to create a CrazyTalk Model. Follow the wizard to complete the model-creating process.
3. Go to the **Output** page and switch to the **Widget** tab. Click the **Export**

iContent  button.

4. Click the **OK** button to replace the original flash videos with new videos of your custom avatar if you are prompted with a warning message.
5. Load the html page to view the result:

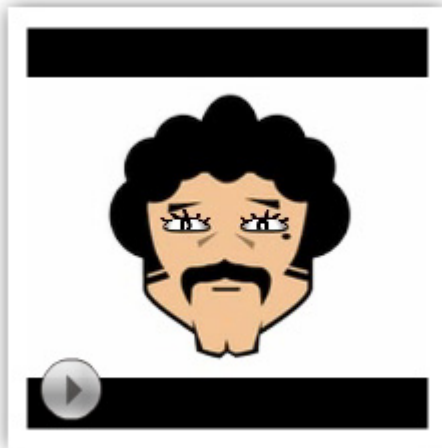


► Custom Talking Script

If you want to playback a custom talking script when the **Play** button is clicked, you may perform two methods to achieve it:

A. Using Existing Web Avatar File

1. Apply the **Web Avatar** project on the **Project** page.
2. Go to the **Script** page and double-click the last talking script.

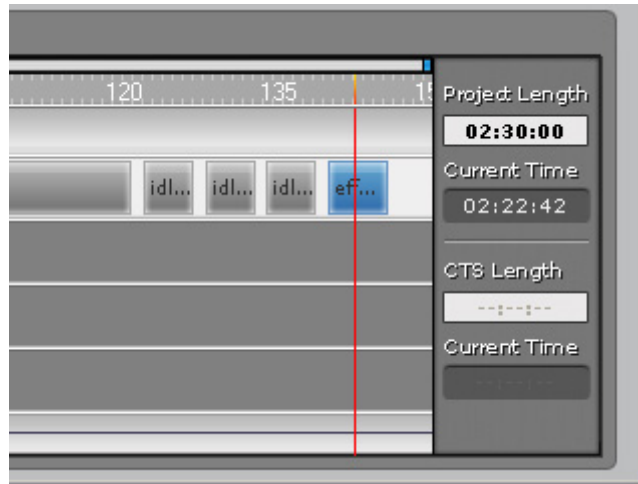

3. Replace the talking script with a new one (you may also need to adjust the length of the project).
4. Convert the new CTS length into an integer number:
If the **CTS Length** reads 02:03:45, the integer number will be $(02 \times 6000 + 0345 = 12345)$.
5. Open the ini file from the same folder where the web avatar file is located. Change the **FrameNo** from {14000 - 14600} to {14000 - X} in the [FLV_0005] section where $X = 14000 + \text{integer number calculated}$. In the example, it will be 14000 - 26345 (14000+12345)
6. Export the project via the **Widget** page.

B. Using New Empty Project

You may also use an empty project to generate a talking script flash for playback.

1. Optionally save the same avatar as the web avatar into custom gallery.
2. Create a new project.
3. Apply the avatar you just saved in step 1.
4. In the **Stage** editor, add and edit talking scripts.
5. Go to the **Output** page, **Web** tab and use following settings:
 - **Target Resolution: Use Full Image.**
 - **Output Size: 200 x 200.**
 - **Frame Rate: 30 / sec(s).**
 - **Advanced Audio/Video: High.**
6. Click the **Export**  button and replace script01.flv.

Output for Web

CrazyTalk offers you to output **Flash** , **RM**, or **WMV** files for web. Please follow the steps below.

The screenshot shows the 'Output for Web' settings panel in the CrazyTalk software. At the top, there are four tabs: 'Media', 'Widget', 'Web', and 'YouTube'. The 'Web' tab is currently selected. Below the tabs, the 'Format' is set to 'Flash File'. Under 'Output Settings', the 'Export Specified Section' checkbox is checked, with a time range from '00:00:00' to '01:00:02'. The 'Original Resolution' radio button is unselected, while the 'Target Resolution' radio button is selected, with a dropdown menu showing 'VCD NTSC (352x240)'. Below this, the 'Crop' radio button is unselected, and the 'Use Full Image' radio button is selected. The 'Output Size' is set to '352' x '240'. The 'Frame Rate' is set to '15' /Sec(s). The 'Border Color' is set to a white color swatch. An 'Advanced' button is located at the bottom of the 'Output Settings' section. At the bottom of the panel, the 'HTML' section has the 'Produce HTML Page' checkbox checked, and the 'Including Standby Motion' checkbox is unchecked.

Media Widget Web YouTube

Format : Flash File

Output Settings

☒ Export Specified Section

From 00:00:00 to 01:00:02

☐ Original Resolution

☒ Target Resolution

VCD NTSC (352x240)

☐ Crop

☒ Use Full Image

Output Size : 352 × 240

Frame Rate : 15 /Sec(s)

Border Color :

Advanced


HTML


☒ Produce HTML Page

☐ Including Standby Motion

Flash Files

You may output **Flash** files for the **Web**:


1. Select the **Flash Files** item in the **Format** drop down list.
2. Adjust the other [output settings](#).
3. Click **Advanced**  button and drag the scroll bar to set the **Video** and **Audio** quality for the **Flash** file.

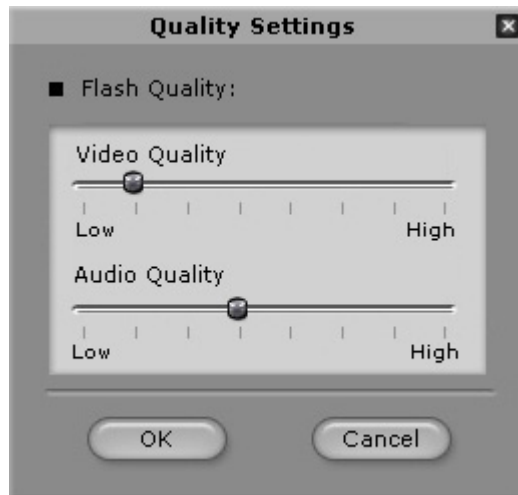

4. Check the boxes accordingly in the **HTML** section:
 - Check **Produce HTML Page** box to create a web page in which the video file embeds.
 - Check [Including Standby Motion](#) so the model contains standby motion for flash files (RM and WMV format do not support this feature).
5. Click **Export** .

Output for YouTube

CrazyTalk provides this feature so you may directly upload your project to **YouTube** instead of having to export files, waiting for rendering, browsing to the **YouTube** page and uploading the exported video files manually.

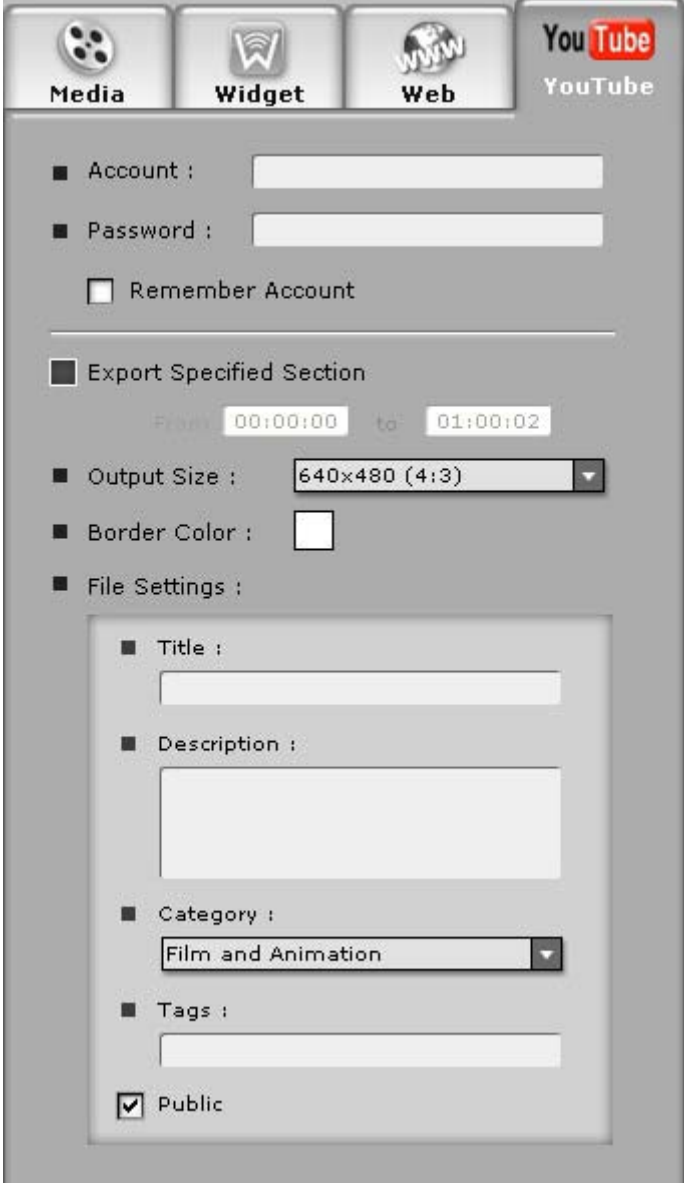

The screenshot displays the 'Output for YouTube' settings window in CrazyTalk. At the top, there are four tabs: 'Media' (with a film reel icon), 'Widget' (with a Wi-Fi icon), 'Web' (with a globe icon), and 'YouTube' (with the YouTube logo). The 'YouTube' tab is selected. Below the tabs, the interface includes fields for 'Account' and 'Password', a 'Remember Account' checkbox, and an 'Export Specified Section' checkbox. Under 'Export Specified Section', there are 'From' and 'to' timecode fields set to '00:00:00' and '01:00:02' respectively. Further down, there is an 'Output Size' dropdown menu set to '640x480 (4:3)', a 'Border Color' color picker, and a 'File Settings' section. The 'File Settings' section contains a 'Title' text field, a 'Description' text area, a 'Category' dropdown menu set to 'Film and Animation', a 'Tags' text field, and a 'Public' checkbox which is checked.

Media Widget Web YouTube

■ Account :

■ Password :

☐ Remember Account

■ Export Specified Section

From to

■ Output Size :

■ Border Color :

■ File Settings :

■ Title :

■ Description :

■ Category :

■ Tags :

☒ Public



1. Click the **YouTube**  tab to toggle the output mode.
2. Enter your data into all fields on this page (these fields cannot be empty in order to upload files).
 - **CrazyTalk** uploads the video into your account with your account information.
 - If you wish to enter more than one tag in the **Tags** field, please separate them with a space. Your visitors will quickly be directed to view videos related to the tags from your **YouTube** video page.
3. Check the **Export Specified Section** option if you only want to export a specific part of the project.
4. Specify the **Output Size** from the drop-down list.
5. Click the **Go to YouTube**  button to open the **YouTube** webpage in your default browser. Click the **Upload**  button to directly upload this project.

PREFERENCE SETTINGS

Press the **Preference**  button to open the Preference. The following dialog box is displayed:



- **Temporary Folder:** The Temporary Folder stores temporary files created by CrazyTalk during normal operation. You can define where temporary files are saved using the preferences pane.
- **Enable Undo:** Allows you to define the maximum number of undos. You can set the range between 5 to 99 times.
- This setting does not include the number of undos in the **Image Processing** and **Mask Editing** dialogs.
- **Maximum Image Import Size:** This setting enables you to decide how many millions of pixels you want to support when importing an image. If the imported image is over your definition, it will be reduced to fit. If your computer is powerful and you want to edit a large image, you can select the highest setting.
- **Set Workspace Image Size:** This setting enables you to decide how many pixels you want to display on **CrazyTalk** while working. This setting will not affect the exported data. It will use the original image while exporting. If your computer has CPU resource concerns and you do not edit large sized images frequently, we suggest you to keep this setting low.

- **Show Getting Started when start-up:** Activate this checkbox if you want to display the **CrazyTalk6 Getting Started** dialog each time you launch **CrazyTalk**.



- **Show fitting wizard for importing image:** Activate this checkbox so the step-by-step fitting wizard is started after a new image is loaded.

ASSETS LOCATION

The assets for **CrazyTalk** are stored in specific folders:

	Windows XP
Embedded Templates	C:\Program Files\Reallusion\CrazyTalk 6\Templates\CrazyTalk 6 Template\
Custom Templates	C:\Documents and Settings\All Users\Documents\Reallusion\Custom\CrazyTalk 6 Custom\
Shared Custom - Script and Expression	C:\Documents and Settings\All Users\Documents\Reallusion\Shared Custom\CrazyTalk 6 Custom\

	Windows Vista/Windows 7
Embedded Templates	C:\Program Files\Reallusion\CrazyTalk 6\Templates
Custom Templates	C:\Users\Public\Documents\Reallusion\Custom\CrazyTalk 6 Custom
Shared Custom - Script and Expression	C:\Users\Public\Documents\Reallusion\Shared Custom\CrazyTalk 6 Custom

	Windows Vista/Windows 7 (64 bits)
Embedded Templates	C:\Program Files (x86)\Reallusion\CrazyTalk 6\Templates
Custom Templates	C:\Users\Public\Documents\Reallusion\Custom\CrazyTalk 6 Custom
Shared Custom - Script and Expression	C:\Users\Public\Documents\Reallusion\Shared Custom\CrazyTalk 6 Custom

KEYBOARD SHORTCUTS

General

Keyboard Shortcut (Hotkey)	Function
ESC	Cancel.
Ctrl + Z	Undo.
Ctrl + Shift + Z	Redo.
Ctrl + S	Save Project.
Ctrl + O	Open Project.
+	Zoom in.
-	Zoom out.
/	Original size.
*	Fit to window.
F11	Full Screen On/Off.
F2	Rename (selected custom models/eyes/script/SFX/motion clip).

Model Page

Keyboard Shortcut (Hotkey)	Function
Ctrl + Clicking on target points	Select multiple control points in Basic/Detailed Facial Mode .
Space	Play/Stop.
Ctrl + Shift + S	Add current model(s) to custom gallery.
Ctrl + M	Toggle Face Orientation panel (profile setting).
B	Switch Paint / Erase tool in Background Mask Editing panel.

Script Page - Edit

Keyboard Shortcut (Hotkey)	Function
Ctrl + X	Cut.
Ctrl + C	Copy.
Ctrl + V	Paste.
Del	Delete.

Script Page - Advanced Timeline Editing

Keyboard Shortcut (Hotkey)	Function
Ctrl + Shift + S	Add selected script to custom gallery.
Ctrl + Shift + S	Add motion clip to custom gallery. (must mark one part on the motion script track first)
Ctrl + Drag motion clip right edge	Change motion clip speed.
Drag script/motion clip right edge	Loop script/motion clip.
Ctrl + "+"	Zoom in (stage/timeline Editor).
Ctrl + "-"	Zoom out (stage/timeline Editor).
Ctrl + "/"	Zoom all (stage/timeline Editor).
Space	Play/Stop.
Ctrl + E	Toggle Camera Editor.
Ctrl + K (Pro only)	Toggle Key Editor.
Ctrl + P	Toggle Puppeteering Panel.
1, 2, 3, 4, 5	Change puppet profile during recording.
Q, W, E, R, T, Y	Change full face control mode during recording.
F10	Click the Record button in Puppeteering Panel.
F12	Click the Preview button in Puppeteering Panel.

Puppeteering Panel

Keyboard Shortcut (Hotkey)	Function
Ctrl + P	Toggle Puppeteering Panel.
1, 2, 3, 4, 5	Change puppet profile during recording.
Q, W, E, R, T, Y	Change full face control mode during recording.
F10	Click the Record button in Puppeteering Panel.
F12	Click the Preview button in Puppeteering Panel.

Advanced Function

Keyboard Shortcut (Hotkey)	Function
Ctrl + 	Save the Project with the model stored in JPEG format to decrease the project size.
Ctrl + 	Save the model in JPEG format to decrease the file size.